

QUICKSPECS


Overview

AT A GLANCE

- Immediate out-of-box productivity with pre-installed software like Microsoft Office Small Business, and access to convenient Compaq Online Services
- Internet Access keyboard button gives instant Internet access
- Up to 36-GB¹ Hard Drive Capacity with a second hard drive
- Battery life of up to nine hours² with three Li-Ion batteries installed
- 3-spindle support provides concurrent access to your hard drive, CD/DVD and floppy
- Weight starting at 5.75 lbs
- MultiBay technology supports an additional 6-cell Battery, Second Hard Drive, 24X Max³ CD-ROM, 4X⁴ DVD-ROM drive, or LS-120 drive
- DualBay technology supports: diskette drive or an additional 9-cell battery
- 64-bit AGP 2X ATI Rage Mobility video graphics with 8-MB SDRAM
- Docking solutions available
- Compaq Services, including a three-year, Worldwide Limited Warranty⁵ with a free, one-year second business day⁶ pick-up and delivery service

CONFIGURABLE COMPONENTS

- Choice of configurations of Intel Pentium[®] III 450- or 500-MHz processors
- Choice of 12.1 or 14.1" TFT Panel
- Choice of 4-, 6-, 12 or 18-GB¹ hard drives
- Choice of 24X Max³ CD-ROM or 4X DVD-ROM⁴
- SDRAM upgradable to 256 MB with two available slots
- Integrated Mini PCI V.90⁷ data/14.4 Kb/s fax modem or V.90⁷ fax/modem Intel PRO+ Ethernet combination card
- Choice of Pointing Stick or Touch Pad
- Choice of Microsoft Office 2000 Small Business, Office 2000 Professional or Word 2000
- Other components available

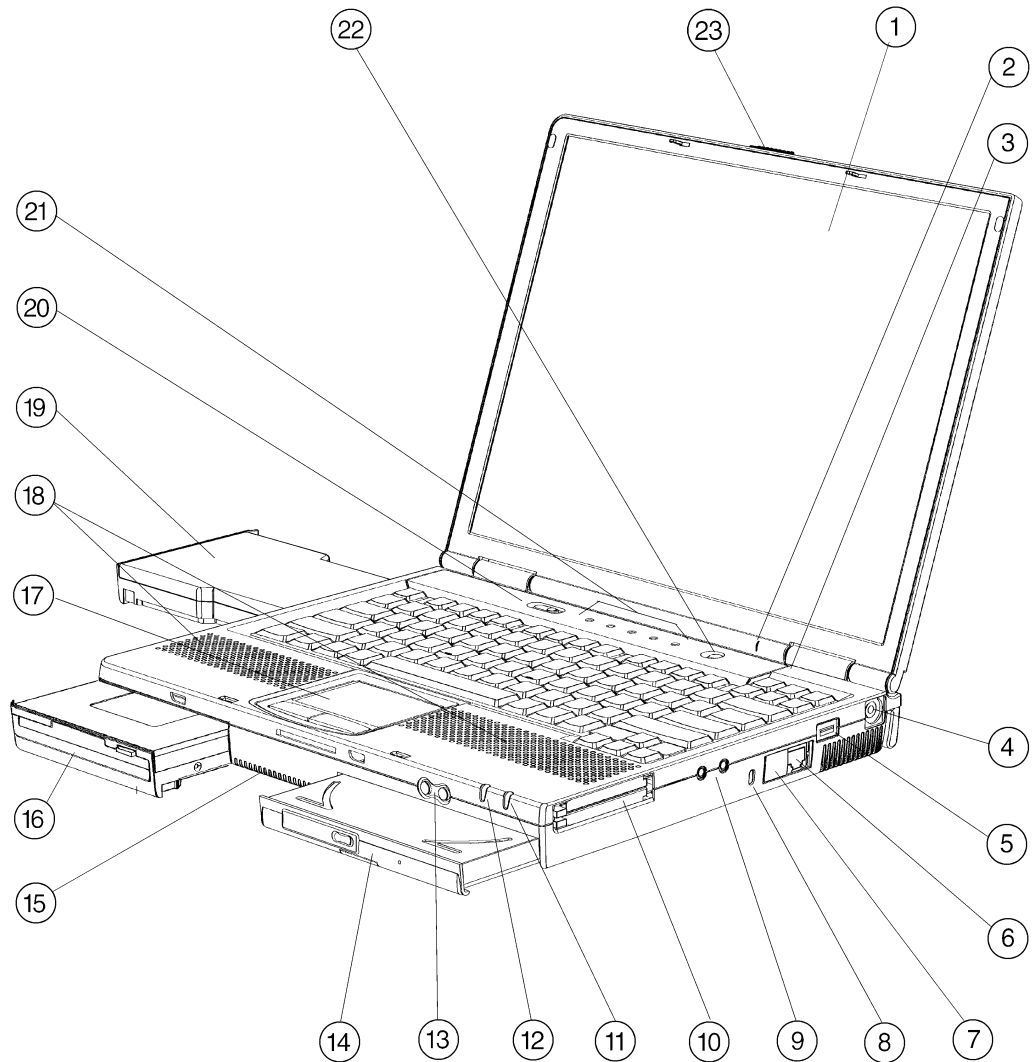

- | | |
|--|---|
| 1. 14.1-in 1024 x 768 color display | 14. MultiBay (CD-ROM/DVD-ROM/secondary hard drive/MultiBay Battery) |
| 2. Microphone | 15. Primary Hard Drive (under the Unit) |
| 3. Lid Switch | 16. Dual Bay (floppy or second primary battery) |
| 4. TV/Video out (NTSC/PAL) | 17. Touch Pad (Optional) |
| 5. Infrared Transceiver | 18. Stereo Speakers |
| 6. Integrated RJ-11 Jack, 56K v.90 ⁷ mini PCI modem | 19. Primary Battery |
| 7. RJ-45 Ethernet Port with Intel PRO+ Mini PCI option | 20. Power Switch |
| 8. Cable Lock Connector | 21. Status LEDs |
| 9. Microphone Jack/Headphone Jack | 22. Suspend Button |
| 10. PC Card Slots (2) | 23. Display Latch |
| 11. Battery Power Light | 24. Pointing Stick (Not displayed, optional) |
| 12. AC Power Light/Standby MultiBay (CD-ROM/DVD-ROM/secondary hard drive/MultiBay Battery) | 25. 4 Internet Keys (Not displayed) |
| 13. Volume control/mute | |

COMPAQ

QUICKSPECS

Standard Features

MODELS

Configure to Order

Prosignia Notebook 190

Select the following to configure your own Prosignia Notebook:

Processor
Memory
Hard Drive
Panel Size
Removable Storage
Optical Storage
Software
Modem or Modem/NIC
Combination Card

Flexible Solutions Configure to Order

Order the Prosignia Notebook 190 the way the customer wants it by selecting the processor, hard drive, memory, and more. Purchase directly from Compaq or a Compaq Authorized Agent. Configurable components and Options change frequently. Check Q-View or www.compaq.com for the latest options available from Compaq.

Processor

Intel Pentium III processor 500 or 450 MHz

Cache Memory

Integrated 256-KB level 2

Memory

Standard	0 MB
Maximum	256 MB

Primary Storage

Hard Drives 18-, 12-, 6-, or 4-GB¹ Ultra ATA

MultiBay Devices

4X⁴ DVD-ROM
24X Max³ CD-ROM
LS-120
MultiBay Battery
Secondary Hard Drive

DualBay Devices

Diskette Drives (included)
Second Primary 9-cell battery

Communications

Integrated Mini-PCI 56K V.90⁷ modem or Mini PCI 56K V.90⁷ modem and Ethernet NIC combination

Keyboard

101/102-key compatible keyboard with isolated, inverted-T cursor control keys, and right-control key, special feature hotkeys for instant access to power conservation, QuickLock/QuickBlank, toggle between internal and external, or simultaneous displays, battery gauge, speaker volume control, brightness and contrast. Four Integrated Internet Keys allow fast access to the Internet and Compaq Online Services.

Pointing Device

Choice of Touch Pad or Pointing Stick

PC Card Slots

Two Type II/One Type III PC Card Slot(s) which support both 32-bit CardBus⁸ and 16-bit PC Cards; zoomed video support in bottom slot only

Multimedia

Compaq Premier[®] Sound[™] for enhanced stereo audio
Integrated 16-bit Sound Blaster Pro-compatible stereo audio
Integrated stereo speakers and microphone
Software/hardware volume control
Headphone out jack
Microphone in jack
Software MPEG1 support
Optional 4X DVD-ROM⁴ with DVD movie playback software, MPEG2 Support
Internal 24X Max³ CD-ROM Drive
RCA Composite TV-out port
2X AGP graphics
8-MB SDRAM

QUICKSPECS

Standard Features

Interfaces

PC Card	Two Type II/One Type III
Enhanced Parallel	1
Serial	1
External Monitor	1
External Keyboard/ Pointing Device	1 (Supports Y-cable in order to attach both Keyboard and Mouse simultaneously)
Expansion Base	1
TV Out	1
Headphone/Line-out	1
Microphone in	1
AC Power	1
RJ-11	1 (Optional)
RJ-45	1 (With optional Intel PRO+ Mini-PCI card)
USB Port	1
Infrared	1 (4 Mb/s ⁹ support)

Graphics

2X AGP implementation with dedicated 66-MHz AGP graphics bus; ATI Mobility-P™ graphics controller with 8 MB of 125-MHz SDRAM; up to 100 Hz external refresh at SVGA resolution up to 16.8M colors; supports dual-view display, with two different images on two different displays at different refresh rates; NTSC & PAL TV-out support (integrated) up to 1024 x 768 resolution

Display

14.1-inch color TFT with 1024 x 768 resolution (up to 16.7M colors internal)
12.1-inch SVGA color TFT with 800 x 600 resolution (up to 16.7M colors internal)

OS Support

Windows 98 Second Edition pre-installed; Windows NT and Windows 95 supported

Software

Microsoft Office 2000 Small Business, or
Microsoft Office 2000 Professional, or
Microsoft Word 2000
Microsoft Internet Explorer 5.0
Norton AntiVirus
WinFAX Basic
CompuServe and AOL
Compaq Online Services
Microsoft NetMeeting
Microsoft PC Card Manager
Diagnostics for Windows 98
Online Safety and Comfort Guide
Compaq Power Management

QUICKSPECS

Standard Features

Compaq Online Services

A full suite of Internet-powered solutions that provide reliable Internet access, online office management tools, and e-commerce capabilities – all designed to lower technology and staffing costs, and increase productivity for growing businesses

Access the Internet
Briefcase
Backup
Courier
Delivery
Postage
All-in-One eBusiness Center
Message Center Lite
Message Center
RingMeNow
Small Business Resource Center
Online Training

Security

Configuration Control Hardware
Memory Change Alert
Ownership Tag
Setup Password
Power-On Password
DriveLock
QuickLock
QuickBlank

Power Supply

External AC Adapter and 4-foot power cord are included. Total length including External AC adapter is 10 feet (3 meters).

Battery

9-cell Li-Ion battery is provided in the primary battery bay and provides up to 3.5 hours² of battery life. A second 9-cell Li-Ion battery is supported in the Dualbay. A 6-Cell battery is supported in the MultiBay providing up to two hours² of battery life for a total maximum battery life of up to nine hours² utilizing all three batteries.

Power Conservation

Instant-On via Standby; Hibernation, pop-ups with three presets and one custom level of power conservation. Full ACPI compliance with Windows 98

Service and Support

Compaq Services provides a range of services including a Three-year, Limited Worldwide Warranty⁵, with 7 x 24 toll-free service line at 1-877-456-7878 and a free, one-year, second business day⁶ pick-up and delivery service from Compaq. All shipping and handling materials are supplied by Compaq.

QUICKSPECS

Configurable Components

Solutions Configure to Order

Configurable components are available directly from Compaq or through a Compaq Agent and are for first time configurations only.

Base Unit *(Choose one of the following)*

All base units include primary 9-cell Li-Ion Battery, AC Adapter, Diskette Drive and MultiBay/DualBay Weight Saver

Intel Pentium III 500-MHz processor

Intel Pentium III 450-MHz processor

TFT Display Screen *(Choose one of the following)*

14.1" Panel

12.1" Panel

Primary Hard Drives *(Choose one of the following)*

18-GB¹ SMART Hard Drive

12-GB¹ SMART Hard Drive

6-GB¹ Hard Drive

4-GB¹ Hard Drive

Memory *(Choose one of the following)*

256-MB SDRAM

128-MB SDRAM

64-MB SDRAM

32-MB SDRAM

MultiBay Options

SuperDisk LS-120

Second SMART Hard Drive (with Adapter)

6-Cell Li-Ion Battery

4X⁴ DVD-ROM Drive with software decoder

24X Max³ CD ROM Drive

DualBay

1.44-MB Diskette Drive (Included)

9-Cell Li-Ion Battery (Optional)

Communications Options

Compaq Mini PCI 56K⁷ Modem

Compaq 56K (V.90)⁷ plus Intel PRO/100+ Mini PCI (Modem and Ethernet NIC)

Pointing Device *(Choose one of the following)*

Touch Pad

Pointing Stick

Business Software *(Choose one of the following)*

Microsoft Office 2000 Professional

Microsoft Office 2000 Small Business

Microsoft Word 2000

Software *(Optional)*

Norton Utilities for Windows

Symantec Act

Symantec WinFax PRO

Symantec Mobil Essentials

Carbon Copy (complete version)

PcAnywhere 32

Intuit Quicken Deluxe 98

Microsoft Project 98 Upgrade

Corel WordPerfect Suite 8 Professional Upgrade

CorelDRAW 8 Upgrade

Netscape Communicator Internet Access Edition

Netscape Communicator Deluxe Edition

Netscape Publishing Suite

Lotus 1-2-3 97 Upgrade

Lotus SmartSuite 97 Upgrade

Microsoft Front Page 98 Upgrade

Intuit Quick Books 5.0

Adobe Pagemaker 6.5

Adobe Photoshop 5.0

Adobe Illustrator 7.0

QUICKSPECS

Options

Enhancements

Enhancements are available through Compaq Authorized Resellers for first time configurations or upgrades, or directly from Compaq or a Compaq Agent for upgrades.

Memory

128-MB SDRAM	144547-B21
64-MB SDRAM	144546-B21
32-MB SDRAM	144545-B21

Monitors

TFT8000 Flat Panel	307906-001
TFT5000 Flat Panel	325700-001
P1610 Color	305708-001
P110 Color ¹⁰	284956-001
P75 Color	307806-001
V1000 Color ¹⁰	351757-001
V900 Color ¹⁰	303500-001
V75 Color (carbon)	307710-002
V500 Color	325900-001
S900 Color ¹⁰	360562-001
S700 Color	360512-001

MultiBay Options

18-GB ¹ SMART Hard Drive	153927-B21
12-GB ¹ SMART Hard Drive	153926-B21
6-GB ¹ SMART Hard Drive	153925-B21
SuperDisk LS-120	144557-B21
Li-Ion 6-Cell Battery	144558-B21
4X ⁴ - DVD-ROM Drive	153952-B21
24X Max ³ CD ROM Drive	146812-201

DualBay Options

Li-Ion 9-Cell Battery	144559-001
-----------------------	------------

PC Cards/Communications

Wireless LAN 2 Mb/s	134711-001
Compaq M420 56K ⁷ Global Modem	317900-001
10/100 TX PC Card UTP Controller	335506-B21
10 T PC Card UTP Controller	292806-B21
10 2 PC Card Coax Controller	292807-B21
10/100 TX PC Card UTP Upgrade	292813-B21
Margi DVD-to-Go PC Card	202861-B21
16/4 Token Ring PC Card IBM UTP/STP	301208-B21

For additional compatible PC Cards, view the Compaq PC Card Solutions List on the Compaq website at: <http://www.compaq.com/support/techpubs/pcmcia/pccardlist.html>.

Port Replicator/Convenience Base

Prosignia Port Replicator	144488-004
Prosignia Convenience Base with Intel NIC	144487-004
Convenience Base Monitor Stand	122931-B25

Power

Li-Ion 9-Cell Battery (Primary)	144559-001
Li-Ion 6-Cell Battery (MultiBay)	144558-001
External Battery Charger	135555-001
AC Adapter	120765-001
AC Line Cord (4 ft)	213379-007
Auto Adapter	401043-B25
Aircraft Adapter	386504-B21

Input Devices

External Enhanced III Keyboard (carbon)	118003-008
Compaq Mouse (carbon)	103180-B21
Compaq/Microsoft Intellimouse	294306-B21
Numeric Keypad (carbon)	294317-B21

Other

Compaq Security Lock	294316-B21
Portable Video Conferencing	296954-001
Headset with Microphone	220460-001
MP1600 Microportable Projector	386202-001
Universal Monitor Stand (opal)	316246-B21

Carrying Cases

Compaq Value Case	294266-B21
Compaq Workstation Case	294267-B21
Compaq Global Case	294268-B21
Compaq Executive Case	294269-B21
Compaq Professional N Case	401366-B21
Compaq Professional L Case	401367-B21

QUICKSPECS

Memory

Compaq Notebook 190

STANDARD MEMORY

0 MB installed in Slot 1

Slot	Slot
1	2
Empty	Empty

SAMPLE MEMORY CONFIGURATION

Support for up to 256 MB of memory is available


Up To	Slot	Slot
	1	2
256 MB	128 MB	128 MB
192 MB	64 MB	128 MB
128 MB	64 MB	64 MB
96 MB	64 MB	32 MB
64 MB	32 MB	32 MB

This chart does not represent all possible memory configurations. The following memory options are available from Compaq:

- 128-MB Memory Upgrade
- 64-MB Memory Upgrade
- 32-MB Memory Upgrade

QUICKSPECS

Storage



- 1 MultiBay
- 2 Primary Hard Drive
- 3 Dual Bay

COMPAQ PROSIGNIA NOTEBOOK 190 DRIVE SUPPORT

	Quantity Supported	Drive Bay Supported
Removable Media		
1.44-MB Diskette Drive	Up to 1	Dual Bay
Second 9-Cell Battery		
4X4 DVD ROM		
24X Max3 CD-ROM Drive	Up to 1	MultiBay
Second HDD¹¹		
18-GB ¹ SMART Hard Drive		
12-GB ¹ SMART Hard Drive		
6-GB ¹ SMART Hard Drive		
MultiBay (6-Cell) Battery		
SuperDisk LS-120		
Hard Drives		
18-GB ¹ SMART Hard Drive	Up to 1	Dedicated hard drive bay
12-GB ¹ SMART Hard Drive		
6-GB ¹ SMART Hard Drive		
4-GB ¹ SMART Hard Drive		

QUICKSPECS

Technical Specifications

System Unit

Dimensions (HxWxD)	1.65 x 12.4 x 9.9 in/41.8 x 316 x 254 mm
Weight	5.75 to 7 lbs/2.6 to 3.17 kg (weight varies based on configuration ¹²)
Stand-Alone Power Requirements	
Nominal Operating Voltage (Li-Ion)	10.8V
Maximum Operating Power	15W
Peak Operating Power	30W
Temperature	
Operating	50° to 98° F/10° to 35°C
Non-operating	-4° to 140° F/-20° to 60°C
Relative Humidity (non-condensing)	
Operating	10% to 90%
Non-operating	5% to 95%, 101.6° F/38.7°C Maximum wetbulb temperature
Shock	
Operating	10 G, 11 ms, half sine
Non-operating	240 G, 2 ms, half sine
Vibration	
Operating	0.5 G zero-to-peak, 10 to 500 Hz, 0.25 Oct/Min sweep rate
Non-operating	1.5 G zero-to-peak, 10 to 500 Hz, 0.5 Oct/Min sweep rate
Maximum Altitude (unpressurized)	
Operating	0 to 10,000 ft/3,048 m
Non-operating	0 to 30,000 ft/9,144 m

14.1-Inch Color TFT XGA Display

Viewable Dimensions (HxW)	11.22 x 8.46 in/28.5 x 21.5 cm
Diagonal Size	14.1 in/35.81 cm
Number of Colors	Up to 16.8M
Contrast Ratio	150:1
Brightness	120nt min, 150nt typ
Pixel Resolution	
Pitch	0.264 x 0.264 mm
Format	1024 x 768
Configuration	RGB stripe
Backlight	Edge Lit
Total Power Consumption	4.2W

12.1-Inch Color TFT SVGA Display

Dimensions (HxW)	9.7 x 7.24 in/24.6 x 18.4 cm
Diagonal Size	12.1 in/30.7 cm
Mounting	Internal Panel Support
Number of Colors	Up to 16.8M
Contrast Ratio	150:1
Brightness	120nt min, 150nt typ
Pixel Resolution	
Pitch	0.30 x 0.30 mm
Format	800 x 600
Configuration	RGB Stripe
Backlight	Edge Lit
Total Power Consumption	3.5W

QUICKSPECS

Technical Specification

Diskette Drive

Diskette Size	3.5 in
Light	On system
Height	0.5 in/12.7 mm
Bytes per Sector	512
Sectors per track	
High density	18 (1.44 MB)/15 (1.2 MB)
Low density	9
Tracks per side	
High density	80 (1.44 MB)/80 (1.2 MB)
Low density	80
Read/Write heads	2
Access Times	
Track-to track (high/low)	3 ms/6 ms
Average (high/low)	94 ms/174 ms
Settling time	15 ms
Latency average	100 ms

External AC Adapter

Dimensions (HxWxL)	1.15 x 2.375 x 1.4in/2.92 x 6.03 x 3.6 cm
Weight	0.66 lb/0.3 kg
Power Supply (Input)	
Operating Voltage	90 to 260 VAC RMS
Operating Current	1.1 A RMS
Operating Frequency Range	47 to 63 Hz AC
Maximum Transient	4/50 kV

Li-Ion Battery Pack (9-cell)

Dimensions (HxWxL)	0.84 x 2.375 x 1.4 in/2.92 x 6.03 x 3.6 cm
Weight	1 lb/0.455 kg
Power Supply (Input)	
Operating Voltage	10.8 V
Amp-hour capacity	4.8 Ah
Watt-hour capacity	52Wh
Temperature	
Operating	50° to 95° F/10° to 35° C
Non-operating	-12° to 140°F/-25° to 60°C

Li-Ion Battery Pack (6-cell)

Dimensions (HxWxL)	0.57 x 3.93 x 4.55 in/1.44 x 9.9 x 11.5 cm
Weight	1.2 lbs/0.54 kg
Energy	
Voltage	10.8 V
Amp-hour capacity	4 Ah
Watt-hour capacity	36Wh
Temperature	
Operating	50° to 104°F/10° to 40°C
Non-operating	-12° to 140°F/-25° to 60°C

QUICKSPECS

Technical Specifications

Hard Drives¹³

18 GB	Capacity	18.141 GB ¹	Seek Time (typical reads, including settling)	
	Height	0.5 in/12.7 mm	Single Track	2.5 ms
	Width	2.75 in/77 mm	Average	12.0 ms
	Interface	ATA-4	Full-Stroke	23 ms
	Transfer Rate		Logical Configuration	
	Media	85.5 to 161.1 MB/s	Cylinders	35,152
	Interface	UDMA 33.3 MB/s	Data Heads	16
			Sectors per Track	63
12 GB	Capacity	12 GB ¹	Seek Time (typical reads, including settling)	
	Height	0.5 in/12.5 mm	Single Track	2.5 ms
	Width	2.75 in/77 mm	Average	12 ms
	Interface	ATA-4	Full-Stroke	23 ms
	Transfer Rate		Logical Configuration	
	Media	85.5 to 161.6 MB/s	Cylinders	23,392
	Interface	UDMA 33.3 MB/s	Data Heads	16
			Sectors per Track	63
6 GB	Capacity	6.4 GB ¹	Single Track	
	Height	0.5 in/12.5 mm	Single Track	3 ms
	Width	2.75 in/77 mm	Average	13 ms
	Interface	ATA-4	Full-Stroke	24 ms
	Transfer Rate		Logical Configuration	
	Media	86.4 to 153.3 MB/s	Cylinders	12,416
	Interface	UDMA 33.3 MB/s	Data Heads	15
			Sectors per Track	63
4 GB	Capacity	4.3 GB ¹	Single Track	
	Height	0.5 in/12.5 mm	Single Track	3 ms
	Width	2.75 in/77 mm	Average	13 ms
	Interface	ATA-4	Full-Stroke	25 ms
	Transfer Rate		Logical Configuration	
	Media	86.1 to 135.1 MB/s	Cylinders	8,944
	Interface	UDMA 33.3 MB/s	Data Heads	15
			Sectors per Track	63

QUICKSPECS

Technical Specification

24X Max³ CD-ROM Drive

Applicable Disk	CD-ROM (Mode 1, 2 and 3), CD-XA ready (Mode 2, Form 1 and 2), CD-I ready (Mode 2, Form 1 and 2), CD-R (read only), CD Plus, Photo CD (Single and Multi-session), CD-Extra, Video CD, CD-WO (fixed packets only), CD-Bridge
Center Hole Diameter	0.59 in/15 mm
Disk Diameter	12 cm, 8 cm
Disk Thickness	1.2 mm
Track Pitch	1.6 µm
Access Times (typical reads, including settling)	
Random	< 150 ms
Full-Stroke	< 300 ms
Audio Output Level	
Line out	0.7 Vrms
Cache Buffer	128 KB
Data Transfer Rate (typical, including settling)	
Sustained (16X)	2400 KB/s (150 KB/s at 1X)
Variable	1,500 to 3,600 KB/s (10X to 24X)
Normal PIO Mode 4 (single burst)	16.66 MB/s
Start Time	< 8 sec
Stop Time	< 4 sec

4X⁴ DVD-ROM Drive

Applicable Disk	DVD-ROM, CD-ROM, CD-XA, CD-I, Photo CD, Multi-session, Audio, CD-R, CD-RW
Center Hole Diameter	0.59 in/0.39 cm
Disc Diameter	12 cm/8 cm
Disc Thickness	1.2 mm
Track Pitch	0.74 µm
Access Times (typical reads, including settling)	
Random	<150 ms
Full-Stroke	<225 ms
Cache Buffer	128 KB/s (minimum)
Data Transfer Rate (typical, including settling)	
Sustained (16X CD rate)	2400 KB/s (150 KB/s at 1X CD rate)
Sustained 4X DVD	5,520 KB/s (1,380 KB/s at 1X DVD rate)
Normal PIO Mode 4 (single burst)	16.6 MB/s
Start Time	< 15 sec
Stop Time	< 6 sec

QUICKSPECS

Technical Specifications

Compaq 56K (V.90)⁷ plus
Intel PRO/100+ Mini PCI

Form Factor	Mini-PCI Type 1B and 2B per Specification
OS Support (with all released Service Packs)	Windows 95 (OSR2.x), Windows 98 (Gold, SE) Windows NT4.0, Windows 2000, DOS Application Support under Windows
Power Management Support	APM Revision 1.2, ACPI, Compaq Power Management Extensions for Windows NT
Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
Modem Device Driver Name	Compaq 56K (V.90) Mini PCI
Data Mode Capabilities	V.90 (a-law, mu-law), K56flex (a-law, mu-law) V.8bis, V.80, V42.bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) V.34 (file date: 10/96) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.32bis, V.32, V.23 V.22bis, V.22, V.21 Bell 212A Bell 103J
Fax Mode Capabilities	TIA-578-S (Class 1), T.30, T.4 (Group 3) V.17, V.29, V.27term V.21 Channel 2
Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control :+IPR, +ICF, +IFC, + IIRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

¹ For Hard Drives, GB = Billion Bytes.

² Actual results may vary with individual usage. When tested in standard configuration, using the Ziff-Davis BatteryMark Test version 2.0, the battery life of Prosignia Notebook family will be up to 9 hours with 3 batteries installed.

³ Data transfer rates will vary from 150 KB/s to 3600 KB/s.

⁴ Data transfer rates will vary from 150 KB/s to 5,520 KB/s.

⁵ Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

⁶ Pick-up and delivery service is available in 48 contiguous U.S. States and Canada. Eligibility for priority pick-up (second business day return) is limited to certain geographic locations. Carry-in service available outside the U.S. and Canada.

⁷ Designed only to allow faster downloads from 56 V.90 and/or K56flex compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem only supports Windows 9.x and Windows NT 4.0.

⁸ Full support in Windows 9.x.

⁹ IrDA 4 MB compliant. IR performance will vary depending on performance of IR peripherals and applications used.

¹⁰ May not be compatible with the Monitor Support Stand or Convenience Bases due to weight limitations.

¹¹ Second drive in MultiBay requires the Hard Drive Adapter (included).

¹² The lightest configuration is -- 5.75 lbs: 12.1 TFT, no-modem, Weight Savers in both bays, 9-cell battery. The more typical configuration would include of a 14.1" TFT, 9-Cell Battery, FDD Dual Bay, CD-ROM MultiBay, and a Modem weighs 6.95 lbs. The AC adapter is not included in the weight calculation.

¹³ Hard drive specifications will vary depending on vendor.

Compaq, Prosignia registered United States Patent and Trademark Office. QuickBlank, QuickLock, are trademarks and/or service marks of Compaq Computer Corporation.

Intel, the Intel Inside Logo, and Pentium are registered trademarks of Intel Corporation.

Microsoft, MS, Windows and Windows NT are registered trademarks of the Microsoft Corporation.

Other product names mentioned herein may be trademarks and/or registered trademarks of their respective companies.
©1999 Compaq Computer Corporation. All rights reserved. Printed in the U.S.A.