

:: THE ERGO MICROLITE 2




THE NEW ULTRA MOBILE STANDARD FOR EXECUTIVE NOTEBOOKS

:: ERGO MICROLITE 2 TECHNICAL SPECIFICATION

SYSTEM

CASING	Magnesium Aluminium-Alloy Casing (for slim, lightweight & durable notebook chassis)
PROCESSOR	Intel® Centrino™ platform Mobile Intel® Pentium® M 1.3GHz to 1.6GHz in µFCPGA socket supports Power4Gear
ON-BOARD CACHE	1MB on-die L2 Burst Pipe Line
MEMORY OPTIONS	128,256,384,640MB (DDR266 DRAM modules)
MAJOR CHIPSET	Intel 855-GM

MICROLITE 2 NOTEBOOK

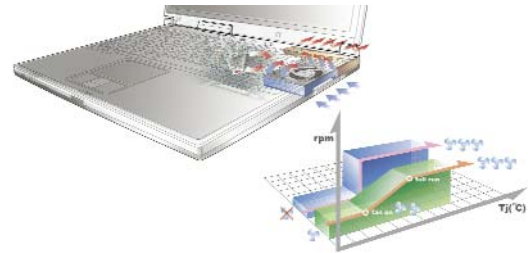

Magnesium Alloy & "Flux Tunnel Routing" Heat Dissipation

GRAPHICS

SCREEN TYPE	13.3" XGA TFT
GRAPHIC CHIPSET	Intel® 855GM (Intel® Extreme Graphics)
SCREEN RESOLUTION	1024 x 768 32Bit Colours

STORAGE

REMOVABLE HARD DISK DRIVES	Ultra DMA 9.5mm Ranging from 20GB to 80GB
HARD DISK INTERFACE	Enhanced IDE Ultra ATA DMA 100 Interface support
FLOPPY DISK	External (USB connected)

PORTS/CONNECTIVITY

PCMCIA	1 x Type I/II
USB PORTS	1 x USB 2.0, 2 x USB 1.1
EXTERNAL CRT	1 x VGA (for external monitor)
AUDIO I/O	2 audio jacks (Mic-in & Speaker-out)
KEYBOARD	85-Key Tactile with Windows Keys (plus 4 Hotkeys)
I/R (InfraRed) link	1 x FIR (InfraRed) link
FAX/MODEM	Internal 56 Kbps v.90 Mini PCI Fax/Modem
INTERNAL LAN	10/100 MBit PCI (with LED)
FIREWIRE	Integrated 400MBit FireWire Port (IEEE1394)
WIRELESS DEVICE	Integrated 802.11b wireless adapter (with LED indicator)
PORTBAR II (optional)	Additional ports - 1 x 10/100 RJ-45 LAN, 1 x EPP/ECP Parallel, 1 x PS/2 for Keyboard/Mouse, 2 x USB, 1 x VGA (external monitor) & DC-in power (connects to notebook via PortBar II 68-pin connector). Dimensions 200mm x 160mm x 37mm



Up To 3.5hrs Battery Performance

MULTI-MEDIA

CD ROM	External DVD-Rom or CD-RW or DVD/CD-RW combo
SOUND SYSTEM	Full duplex AC'97 audio with 3D effect
SPEAKERS	Built-in Speaker & Microphone

POWER

POWER ADAPTER	100 - 240V AC Adaptor
BATTERY TYPE	Lithium Ion (3600 mAh, 40Wh capacity)
BATTERY LIFE	up to 3.5 hours (continuous use)
CHARGING TIME	2 hours (fast charging technology)

DIMENSIONS

NOTEBOOK	296mm (w) x 240mm (d) x 21mm (h) front - 27mm (h) rear
POWER SUPPLY	100 x 60 x 30mm
WEIGHT WITH BATTERY	1.9 KG

SECURITY

Kensington Lock, BIOS setup, Power-on, HDD user password protection

POWER MANAGEMENT

ACPI 2.0, full feature SMI power management, Stand-by, Suspend to Disk, Suspend to RAM

POWER ENVIRONMENT

OPERATIONAL	5°C to 35°C, Shock 2G 10ms duration, humidity 10-90% non-condensing
STORAGE	-20°C to 65°C, Humidity 10-90% non condensing
COMPLIANCE	CE, cUL, TUV, CCIB, FCC Class B, CTR 21



Internal 802.11b Wireless Adapter, 56k Modem, Network Adapter & FireWire



Ultra-Slim 21mm & Lightweight 1.9kg

Ergo Technology
at your
fingertips

WWW.ERGO.CO.UK

ERGO COMPUTING UK LTD • WHEATCROFT BUSINESS PARK • EDWALTON • NOTTINGHAM NG12 4DG • TEL 0115 9144 144 • FAX 0115 9144 155
THE BRICK COMPUTER COMPANY • 435 BOSTON STREET • TOPSFIELD • USA • MA 01983 • TEL (978) 213-9907 • FAX (978) 213-9909.

E-MAIL: SALES@ERGO.CO.UK

INTEL, THE INTEL INSIDE LOGO AND PENTIUM ARE REGISTERED TRADEMARKS OF THE INTEL CORPORATION. FIREWIRE IS A TRADEMARK OF APPLE COMPUTER, INC. SPECIFICATIONS CORRECT AT TIME OF GOING TO PRESS AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. E & OE.