

### Overview

#### What's New


- Intel Pentium M Processors
- ATI Mobility Radeon graphics with user selectable 32- or 64-MB DDR SDRAM
- Gigabit Ethernet NIC
- Optional integrated 802.11b and 802.11 a/b wireless LAN modules
- Optional integrated Bluetooth
- Integrated Secure Digital (SD) flash media slot
- Dual pointing devices
- Common Port Replicator and Advanced Port Replicator with Gigabit NIC pass-through.

#### At A Glance


- Intel Pentium M Processors at 1.3, 1.4, 1.5, or 1.6-GHz
- 12.1-inch XGA TFT display
- 256-MB DDR SDRAM upgradeable to 1024 MB
- Up to 60-GB 5400 rpm, user-removable hard drives.
- Magnesium alloy display enclosure
- Microsoft® Windows® XP Professional, Microsoft Windows 2000 and limited localizations of Windows XP Home Edition preinstalled
- Protected by a Three-year, Worldwide Limited Warranty — certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

#### What's Special

- Ultra-light weight – 3.5 lb (1.59 kg)
- Full sized keyboard
- Support for up to two batteries
- 802.11b and 802.11 a/b modules can be upgraded to support the 802.11g standard once ratified
- Dual pointing devices
- Self powered external MultiBay, which provides a cost effective and travel friendly way to access MultiBay drives.
- HP Mobile Printing driver makes on-the-go printing quick and easy

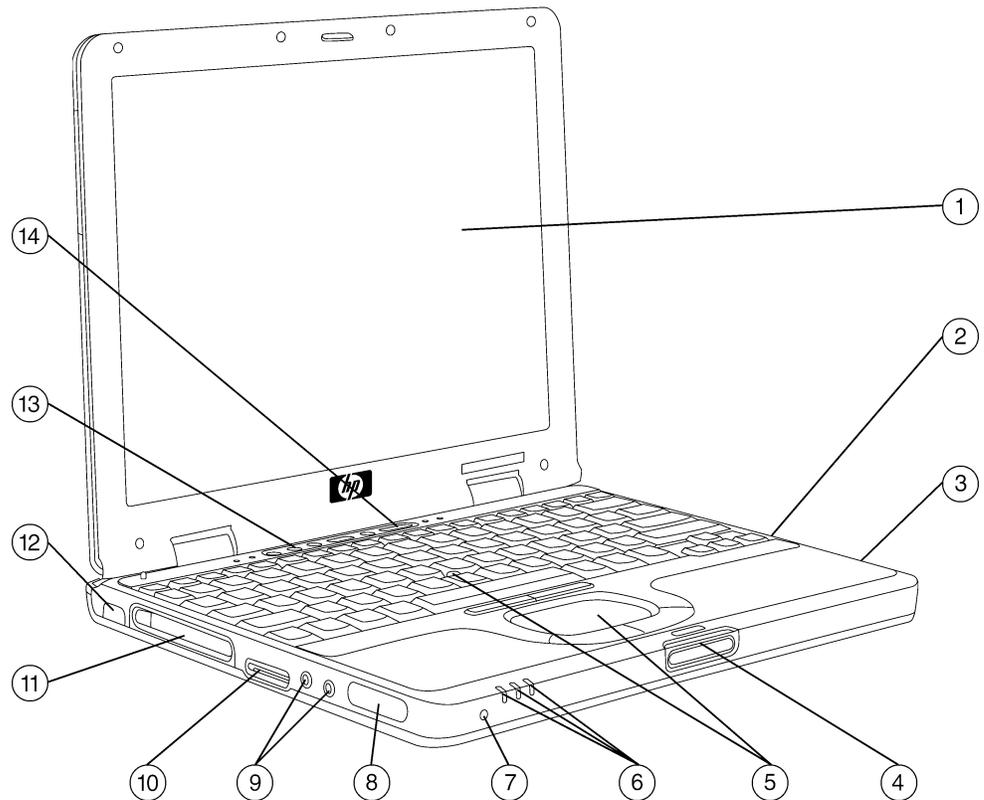

- |  |                                 |
|--|---------------------------------|
| 1. Display                                     | 8. Speaker                      |
| 2. User Removable Hard Drive                   | 9. Headphone/Microphone Jacks   |
| 3. Cable Lock Slot                             | 10. Secure Digital (DS) Slot    |
| 4. Display Latch Release                       | 11. PC Card Slot                |
| 5. Dual Pointing Devices (Pointstick/Touchpad) | 12. Infrared Port               |
| 6. Wireless/Power/Charge LEDs                  | 13. Quick Launch Buttons        |
| 7. Microphone                                  | 14. Volume Down/Up/Mute Buttons |

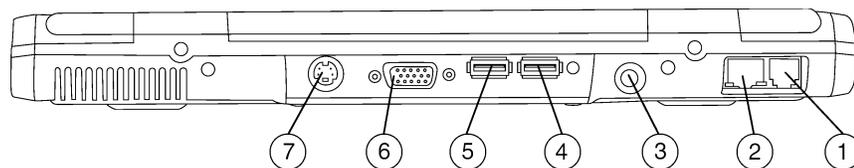

- |                                      |                |
|--------------------------------------|----------------|
| 1. RJ11 (Modem)                      | 5. USB         |
| 2. RJ45 (NIC)                        | 6. VGA Out     |
| 3. DC In                             | 7. S-Video Out |
| 4. Powered USB for External Multibay |                |

### Standard Features

<b>Processors</b>	1.6-GHz Intel Pentium-M Processor with 400-MHz Processor Side Bus and 1024-KB L2 cache	
	1.5-GHz Intel Pentium-M Processor with 400-MHz Processor Side Bus and 1024-KB L2 cache	
	1.4-GHz Intel Pentium-M Processor with 400-MHz Processor Side Bus and 1024-KB L2 cache	
	1.3-GHz Intel Pentium-M Processor with 400-MHz Processor Side Bus and 1024-KB L2 cache	
<b>Chipset:</b> ATI Radeon IGP 350M with 400-MHz Processor Side Bus		
<b>NOTE:</b> Intel Pentium-M Processors support enhanced Intel SpeedStep™ technology. Processor speed denotes maximum performance mode; processors will run at approximately 600 MHz in battery optimization mode.		
<b>Display</b>	Internal	12.1-inch TFT XGA display with 1024 x 768 resolution up to 16.7 M colors
	External	Up to 32-bit per pixel color depth Supports 640 x 480, 800 x 600, 1024 x 768, 1280 x 768, 1280 x 1024, or 1600 x 1200 resolutions up to 100-Hz refresh rate, dependent upon monitor capability, and resolution and color depth settings
<b>Memory</b>	Standard	256-MB 266-MHz SDRAM DDR SDRAM (256-MB SODIMM in slot 1)
	Maximum	1024-MB 266-MHz SDRAM DDR SDRAM (512-MB SODIMMs in slots 1 and 2)
	<b>NOTE:</b> 256 MB of DDR standard with 32 MB of system memory shared as video memory	
<b>NOTE:</b> Shared video memory (UMA) uses part of the total system memory for video performance. For example, if there is 256 MB of system memory, 32 MB will be shared with the video graphics sub-system. The system will have 224 MB of available system memory for other computing activities		
<b>NOTE:</b> Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility		
<b>Communications</b>	10/100/1000 NIC is integrated on the system board	
	56K (V.92) modem with digital line guard	
	<b>NOTE:</b> Designed only to allow faster downloads from V.90/V.92 compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions.	
<b>NOTE:</b> Modem availability is subject to country regulatory approval.		
<b>Keyboard</b>	The 101/102-key desktop compatible keyboard features full size keys, isolated inverted-T cursor control keys, 6 editing keys, both left and right control and alt keys, and 11 function keys. The US layout has 84 keys and the International layout 85 keys. Other features include 19 mm x 19 mm standard key pitch (center-to-center spacing), 2.5 mm key stroke, 2 Windows keys, comfort-dished keycaps, bright key legends for improved visibility in low light conditions, an integrated numeric keypad, and hotkeys providing instant access to power conservation, display brightness, and other controls.	
<b>Quick Launch Buttons</b>	The HP Compaq Business Notebook nc4000 has three Quick Launch buttons designed to provide one-touch access to commonly used features including QuickLock, Wireless on/off, and presentation mode.	
<b>Pointing Device</b>	Dual pointing devices (both Point stick and Touchpad)	
<b>PC Card Slots</b>	One Type II PC Card Slot that supports both 32-bit CardBus and 16-bit PCMCIA Cards	
<b>Flash Media Slots</b>	One integrated Secure Digital (SD) slot	

### Standard Features

---

<b>Storage</b>	Diskette Drives	Optional Diskette Drive*
	Hard Drives	30-GB 4200 rpm SMART 40-GB 5400 rpm SMART 60-GB 5400 rpm SMART
	Optical Drives	24X/10X/24X/8X DVD/CD-RW combo Drive * 24X CD-RW Drive* 8X DVD-ROM Drive* 24X CD-ROM Drive*
	Flash Media Storage	One integrated Secure Digital (SD) slot

**NOTE:** \* Requires optional external MultiBay or Advanced Port Replicator  
**NOTE:** The HP nc4000 hard drives are customer removable and will withstand multiple insertion/removal cycles.

---

<b>Multimedia</b>	HP <i>Premier Sound</i> ™ audio Integrated 16-bit Sound Blaster Pro-compatible audio Integrated mono speaker and microphone External volume controls Stereo Headphone-out Microphone in Software MPEG1 support DVD movie playback software 8X DVD-ROM Drive with DVD movie playback* 24X DVD/CD-RW Combo Drive* 24X CD-ROM Drive* 4X AGP graphics
-------------------	--

**NOTE:** \* Requires optional external MultiBay or Advanced Port Replicator.

---

<b>Interfaces</b>	PC Card Slot	One Type II
	External Monitor	1
	Microphone in	1
	DC Power	1
	RJ-11 (modem)	1
	RJ-45 (NIC)	1
	Infrared Port	1 (4 Mb/s support) (IrDA 4-MB compliant. IR performance will vary depending on performance of IR peripherals and application used.)
	S-video out connector	1
	USB version 2.0 Port	2
	Docking Connector	1
	Travel Battery Connector	1
	LED Status Indicators	7

---

<b>Graphics</b>	ATI Mobility Radeon graphics controller with user selectable 32- or 64-MB DDR SDRAM 4X AGP Hardware support for DirectX 7.0
-----------------	---

**NOTE:** Shared video memory (UMA) uses part of the total system memory for video performance. For example, if there is 256 MB of system memory, 32 MB will be shared with the video graphics sub-system. The system will have 224 MB of available system memory for other computing activities

---

<b>Audio</b>	HP <i>Premier Sound</i> 16-bit sound, Line out/headphone and microphone jacks
--------------	---

---

### Standard Features

---


<b>Operating System</b> <i>One of the following</i>	Microsoft Windows XP Professional Microsoft Windows 2000. Microsoft Windows XP Home (limited localizations) <b>NOTE:</b> Driver support available for Microsoft Windows 98 SE and Microsoft Windows NT 4.0 in June 2003
<b>Software</b>	<b>Preloaded Software</b> Adobe Acrobat Reader Altiris eXpress™ Client Win32 HP Management Agents HP Quick Launch Button Software HP Mobile Printing Driver Intel SpeedStep Technology Applet (Windows 2000 only, built into Windows XP) HP Help and Support (XP Only) Synaptics Touchpad Driver WinDVD DVD Player* (for optional DVD and DVD/CDRW drives) (with optional external MultiBay or Advanced Port Replicator) Roxio Easy CD Creator* (for optional CDRW and DVD/CDRW drives)(with optional external MultiBay or Advanced Port Replicator) <b>NOTE:</b> *For optional CD-RW and DVD/CD-RW drives which are supported in the optional External MultiBay or Advanced Port Replicator.
<b>System Recovery</b>	Each unit is shipped with a CD kit which can be used for full recovery (by reinstalling the OS and drivers) or software recovery (installs only selected standard software).
<b>Intelligent Manageability</b>	Intelligent Manageability, a key component of HP PC Lifecycle Solutions, is the broad set of manageability features found on HP client and server products. The manageability features on PC clients comply with industry standards, such as DMI, SMBIOS, PXE, and WBEM, while pioneering new ground in client manageability. HP introduced the industry's first line of manageable clients in 1995. With HP's lifecycle management philosophy, enterprises have all of the pieces for end-to-end management and proven tools for hassle-free management of PCs. The combination of these tools significantly lowers the Total Cost of Ownership of managing the computing environment. Intelligent Manageability offers solutions in the areas of Initial Configuration and Deployment, Asset Tracking and Security, Software Updating and Management, and Fault Notification and Recovery. For more information, visit these websites: <a href="http://www.hp.com/im">http://www.hp.com/im</a> ; <a href="http://www.hp.com/easydeploy">http://www.hp.com/easydeploy</a> ; <a href="http://www.hp.com/solutions/pcsolutions">http://www.hp.com/solutions/pcsolutions</a>
<b>Security</b>	Configuration Control Hardware Memory Change Alert Ownership Tag Setup Password Power-On Password DriveLock Enabled for PC SmartCard options Kensington Lock Slot
<b>Power Supply</b>	External 65 watt AC adapter, 6-foot/1.8-meter power cord included. Total length including External AC adapter is 12 feet/3.66 meter.

### Standard Features

<b>Battery</b>	<p>The HP Compaq Business Notebook nc4000 6-cell internal main Lithium-Ion battery provides up to 3h 39m of battery life; up to 7h 30m can be achieved using the optional travel battery.</p>		
<b>Battery Re-Charge Time</b>	<table border="1"> <tr> <td>System in OFF mode or Standby</td> <td>2 hours</td> </tr> </table>	System in OFF mode or Standby	2 hours
System in OFF mode or Standby	2 hours		
	<table border="1"> <tr> <td>System ON (depending on system power consumption)</td> <td>2 to 5 hours</td> </tr> </table>	System ON (depending on system power consumption)	2 to 5 hours
System ON (depending on system power consumption)	2 to 5 hours		
	<p><b>NOTE:</b> Actual results may vary with product model, configuration, and individual usage. Hewlett-Packard testing of a nc4000 with an Intel Pentium M 1.4 GHz CPU, Windows XP Pro, 12.1-inch XGA LCD, 256-MB RAM, 60-GB HDD, Lithium-Ion battery, and NIC/modem, achieved an overall Business Winstone 2002 BatteryMark score of 3h 39m Business Winstone® 2002 BatteryMark™ Version 1.0 units. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. System parameters followed test recommendations: panel brightness 50%, power management scheme - Laptop/Portable, hard drive, standby and video timers set to never.</p>		
	<p><b>NOTE:</b> This test was performed without independent verification by eTesting Labs Inc. eTesting Labs Inc. makes no representations or warranties as to the result of the test. BatteryMark is a trademark of Ziff Davis Publishing Holdings Inc., and affiliate of eTesting Labs Inc., in the U.S. and other countries.</p>		
<b>Power Conservation</b>	<p>Supports enhanced Intel SpeedStep Technology (allows a Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)          Hibernation          Instant-on via Standby          Pop-ups with three presets          ACPI compliant</p>		
<b>MultiBay Devices</b>	<p>MultiBay devices may be swapped with the system powered on (hot) under Microsoft Windows XP Professional or Windows 2000 (except MultiBay Zip drive or MultiBay secondary hard drive). MultiBay devices can be swapped with system power off under any supported operating system.  <b>NOTE:</b> MultiBay devices can only be utilized with the optional External MultiBay or Advanced Port Replicator</p>		
<b>Wireless Devices</b>	<p>The HP Compaq Business Notebook nc4000 is designed to offer a choice of wireless configurations. Bluetooth may be combined with 802.11a/b or 802.11b MiniPCI options on any nc4000 notebook. Both the 802.11a/b and 802.11b MiniPCI options are designed to be compliant with the draft 802.11g specification providing future upgradeability. These wireless LAN options offer a wide range of security features: 802.1x user authentication, hardware based Advanced Encryption Standard, and support for all Cisco infrastructures. The HP nc400 is built with high efficiency dual band antennas that provide maximum range and performance.</p>		
<b>Docking</b>	<p>Port Replicator and Advanced Port Replicator. The sleek, new port replicator and advanced port replicator designs provide simple and convenient port management. Features include NIC pass through, USB 2.0, and legacy parallel and serial ports. Compatible across multiple platforms for lower total cost of ownership.</p>		
<b>Service and Support</b>	<p>HP Services includes a Three-year, Worldwide Limited Warranty, pick-up or carry-in and toll-free 7 x 24 hardware technical phone support. On-site service or a one-year warranty are also available.  <b>NOTE:</b> Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.  <a href="http://wss1pro.hp.com/support/warranty_upgrades/product_specific_warranty.asp">http://wss1pro.hp.com/support/warranty_upgrades/product_specific_warranty.asp</a></p>		

### Standard Features

The Etymology of a Model name:

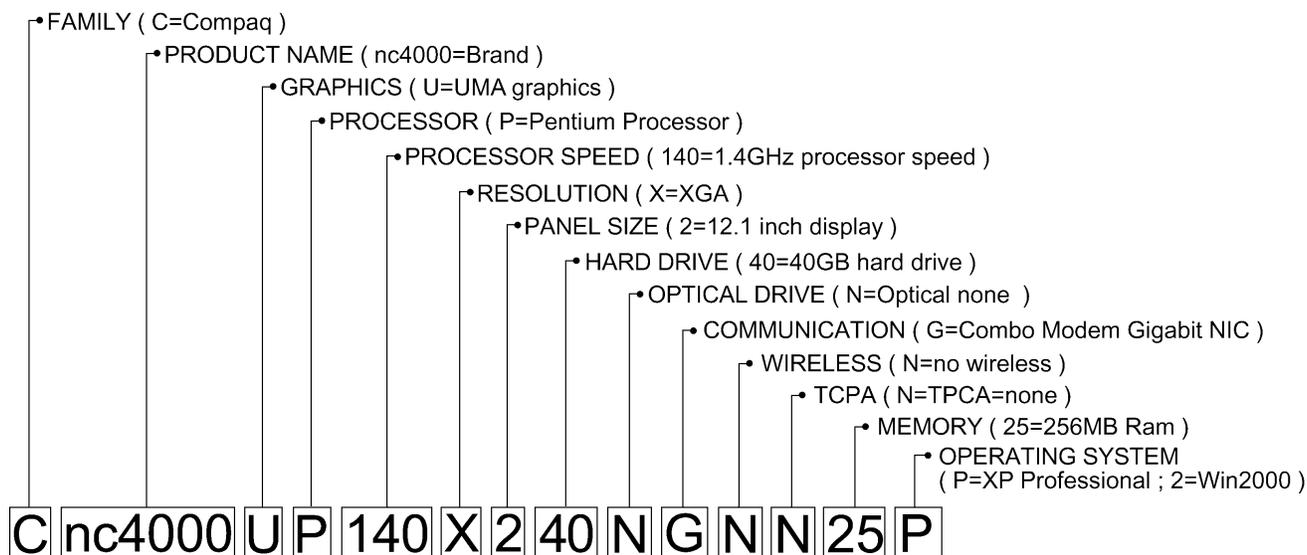

### Standard Features

#### Models

CNC4000UP140X240NGN25P DG244A#xxx	<b>Processor</b>	1.4-GHz Intel Pentium-M processor with 400-MHz Processor Side Bus		
	<b>Display</b>	12.1-inch color TFT XGA with 1024 x 768 resolution (up to 16.7M colors internal)		
	<b>Cache Memory</b>	1024 KB L2 cache		
	<b>Memory</b>	Standard	256-MB 266-MHz DDR SDRAM (256-MB SODIMM in slot 1)	
		Maximum	1-GB 266-MHz DDR SDRAM (512-MB SODIMM in slots 1 and 2)	
	<b>Hard Drive</b>	40-GB 5400 rpm SMART Hard Drive		
	<b>Video Memory</b>	32 MB standard w/256MB or more main memory, configurable up to 64MB.		
	<b>Optical Drive</b>	With optional External MultiBay or Advanced Port Replicator		
	<b>Graphics</b>	ATI Mobility Radeon graphics controller with user selectable 32- or 64-MB DDR SDRAM Hardware support for DirectX 7.0 4X AGP		
	<b>Audio</b>	HP Premier Sound 16 bit sound, Line out/headphone and microphone jacks		
	<b>Communications</b>	56K (V.92) modem, integrated 10/100/1000 NIC		
	<b>Pointing Device</b>	Dual pointing devices (both Point stick and Touchpad)		
	<b>Operating System</b>	Microsoft Windows XP Professional		
	<b>Battery</b>	6-cell Lithium-Ion battery Dual battery capability with optional travel battery		
		External 65W adapter		
<b>Warranty</b>	3/3/0			

CNC4000UP140X240NGN252 DG245A#xxx	<b>Processor</b>	1.4-GHz Intel Pentium-M processor with 400-MHz Processor Side Bus		
	<b>Display</b>	12.1-inch color TFT XGA with 1024 x 768 resolution (up to 16.7M colors internal)		
	<b>Cache Memory</b>	1024 KB L2 cache		
	<b>Memory</b>	Standard	256-MB 266-MHz DDR SDRAM (256-MB SODIMM in slot 1)	
		Maximum	1-GB 266-MHz DDR SDRAM (512-MB SODIMM in slots 1 and 2)	
	<b>Hard Drive</b>	40-GB 5400 rpm SMART Hard Drive		
	<b>Video Memory</b>	32 MB standard w/256MB or more main memory, configurable up to 64MB.		
	<b>Optical Drive</b>	With optional External MultiBay or Advanced Port Replicator		
	<b>Graphics</b>	ATI Mobility Radeon graphics controller with user selectable 32- or 64-MB DDR SDRAM Hardware support for DirectX 7.0 4X AGP		
	<b>Audio</b>	HP Premier Sound 16 bit sound, Line out/headphone and microphone jacks		
	<b>Communications</b>	56K (V.92) modem, integrated 10/100/1000 NIC		
	<b>Pointing Device</b>	Dual pointing devices (both Point stick and Touchpad)		
	<b>Operating System</b>	Microsoft Windows 2000		
	<b>Battery</b>	6-cell Lithium-Ion battery Dual battery capability with optional travel battery		
		External 65W adapter		
<b>Warranty</b>	3/3/0			

### Options

		Compaq PN	HP PN
Memory	512-MB 266-MHz DDR Memory Upgrade	269087-B25	DC390A
	256-MB 266-MHz DDR Memory Upgrade	269086-B25	DC389A
MultiBay Hard Drives	60-GB 5400 rpm SMART Hard Drive	278420-B25	DC894A
	40-GB 5400 rpm SMART Hard Drive	263472-B25	DC365A
	30-GB 4200 rpm SMART Hard Drive	212791-B25	DE882A
MultiBay Storage Devices	24X Combo DVD/CD-RW	269089-B25	DC364A
	24X CD-RW		DC921A
	8X DVD Drive	138230-B25	DC352A
	24X Max CD-ROM	298452-B25	DC351A
	Diskette Drive	226935-B25	DC362A
Other Storage Devices	IBM 1-GB Microdrive (PC card Device)	217390-B25	DC379A
	USB Diskette Drive	230330-B25	DC361A
Expansion Bases	Port Replicator	307648-xx2	DC367A
	Advanced Port Replicator	307651-xx2	DC366A
	External MultiBay	217388-001/B31	DC373A
	Advanced Port Replicator Monitor Stand	274407-B25	DC377A
Power	6-cell Travel Battery		DD880A
Common Power Solutions	External Battery Charger	265603-xxx	DC887A
	AC Adapter 65W	265602-xxx	DC359A
	Auto Power Adapter/Charger	265649-B25	DC360A
	Aircraft Power Adapter	291370-B25	DC899A
	AC Line Cord (10 ft/3.1 m)	217932-xx2	DC851A
Input Devices	External Enhanced III Keyboard (carbon) USB/PS2 Keyboard	118003-009	DC852A
	HP 2 Button Mouse (carbon) USB/PS2 Keyboard 2-button scroll	103180-B23	DC369A
	External 10-Key Numeric Keypad (carbon)	294317-B21	DC854A
Security	Biometric PC Card	146805-B25	DC859A
	Security Cable Lock	294316-B21	DC368A
	HP Smart Card PC Card Reader	135646-B25	DC350A
Carrying Cases	HP Ultra light Case (nylon)	167336-B21	DC853A
	Top Load Leather		DC917A
	Executive Nylon		DC916A
	HP Professional Case (nylon)	242361-B25	DC874A
	HP Professional Case (leather)	242362-B25	DC875A

### Memory

#### hp compaq business notebook nc4000 ultraportable

##### STANDARD MEMORY PLUS OPTIONAL MEMORY

Support for up to 1024 MB of DDR SDRAM memory is available with the installation of optional DDR SDRAM Memory Kits.

0-MB of memory on system board

2 Slots total

1-256-MB DIMM installed in Slot 1

1-Additional open Memory Slot

Memory	Slot 1	Slot 2
	256 MB	Empty

##### STANDARD MEMORY WITH OPTIONAL MEMORY UPGRADES

Support for up to 1024-MB of SDRAM is available with the installation of optional SDRAM Memory Upgrades.

Up to	Slot 1	Slot 2
256 MB	256 MB	Empty
512 MB	256 MB	256 MB
768 MB	256 MB	512 MB
1024 MB	512 MB	512 MB


**NOTE:** This chart does not represent all possible memory configurations. Due to the non industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility.

Following are memory options available from HP:

	Compaq PN	HP PN
512-MB 266-MHz DDR Memory Upgrade	269087-B25	DC390A
256-MB 266-MHz DDR Memory Upgrade	269086-B25	DC389A

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility.

### Storage

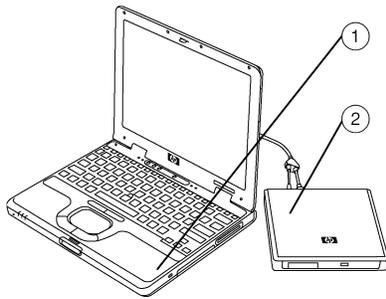

1. Hard Drive
2. Optional External MultiBay

## DRIVE SUPPORT

### System Drive Support

#### Hard Drives

30-GB SMART Hard Drive	Up to 1	Hard Drive Bay
40-GB SMART Hard Drive	Up to 1	Hard Drive Bay
60-GB SMART Hard Drive	Up to 1	Hard Drive Bay

## EXTERNAL MULTIBAY DRIVE SUPPORT

Removable Media	Quantity Supported	Drive Bay Supported
1.44-MB Diskette Drive	Up to 1	External MultiBay
CD-RW Drive	Up to 1	External MultiBay
DVD-ROM Drive	Up to 1	External MultiBay
CD-ROM Drive	Up to 1	External MultiBay
DVD/CD-RW Combo Drive	Up to 1	External MultiBay

#### Secondary Hard Drives

60-GB SMART Hard Drive	Up to 1	External MultiBay
40-GB SMART Hard Drive	Up to 1	External MultiBay
30-GB SMART Hard Drive	Up to 1	External MultiBay

### Technical Specifications

System Unit	Dimensions (H x W x D)	12.1-inch TFT panel display	1.1 x 11 x 9.2 in (2.79 x 27.94 x 23.37cm)
	Weight		3.5 lbs (1.58 kg)
<b>NOTE:</b> * Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components.			
Stand-Alone Power Requirements	Nominal Operating Voltage (Li-Ion)		14.8 VDC
	Maximum Operating Power		40 W
	Peak Operating Power		50 W
Temperature	Operating		50° to 95° F (10° to 35° C)
	Non-operating		-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating		10% to 90% relative humidity, non-condensing
	Non-operating		5% to 90% relative humidity, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating		40 G, 2 ms, half-sine
	Non-operating		240 G, 2 ms, half-sine
Vibration	Operating		0.5 G, 10 to 500 Hz, 0.5 Oct/Min sweep rate
	Non-operating		1.0 G, 10 to 500 Hz, 0.5 Oct/Min sweep rate
Maximum Altitude (unpressurized)	Operating		0 to 10,000 ft/3,048 m (14.7 to 10.1 psia)
	Non-operating		0 to 30,000 ft/9,144 m (14.7 to 4.4 psia)
Industry Standard Certifications	Blue Angel -		No
	UL -		Yes
	CSA -		Yes
	VDE/TUV -		Yes
	Nordic Safety -		Yes
	Mexican Safety-		Yes
	Poland Compliance-		Yes
External AC Adapter	Weight	0.65 lb (0.29 kg) (adapter)	
		0.29 lb (0.13 kg) (power cord)	
Power Supply (Input)	Operating Voltage		90 to 264 VAC RMS
	Operating Current		1.6 A RMS
	Operating Frequency Range		47 to 63 Hz AC
	Maximum Transient		4/50 kV

### Technical Specifications

<b>Primary Lithium-Ion Battery Pack</b>	<b>Dimensions (H x W x L)</b>	0.9 x 2.48 x 8.15 in (2.3 x 6.3 x 20.7 cm)		
	<b>Weight</b>	0.62 lb (.28 kg)		
	<b>Cells/Type</b>	6-cell Lithium-Ion		
	<b>Energy</b>	Voltage	11.1 V	
		Amp-hour capacity	3.96 Ah	
		Watt-hour capacity	40Wh	
	<b>Temperature</b>	Operating	41° to 113° F (5° to 45° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	2 to 3 hours	
		System ON (depending on system power consumption)	2 to 5 hours	

<b>Lithium-Ion Travel Battery Pack</b>	<b>Dimensions (H x W x L)</b>	0.9 x 2.48 x 8.15 in (2.3 x 6.3 x 20.7 cm)		
	<b>Weight (includes caddy)</b>	0.86 lb (.39 kg)		
	<b>Cells/Type</b>	6-cell Lithium-Ion		
	<b>Energy</b>	Voltage	11.1 V	
		Amp-hour capacity	3.96 Ah	
		Watt-hour capacity	40Wh	
	<b>Temperature</b>	Operating	41° to 113° F (5° to 45° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	2 to 3 hours	
		System ON (depending on system power consumption)	2 to 5 hours	

### Technical Specifications

12.1-Inch Color TFT XGA Display	<b>Dimensions (H x W)</b>	10.3 x 7.8 in (26.1 x 19.9 cm)		
	<b>Diagonal Size</b>	12.1 in (30.7 cm)		
	<b>Mounting</b>	Internal		
	<b>Number of Colors</b>	16 M		
	<b>Contrast Ratio</b>	125:1		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	130 nit typical		
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.264 x 0.264 mm	
		<b>Format</b>	1024 x 768	
		<b>Configuration</b>	RGB Stripe	
	<b>Backlight</b>	CCFT		
	<b>Character Display</b>	80 x 25		
	<b>Total Power Consumption</b>	4 W		
	<b>Viewing Angle</b>	+/-35° degrees Horizontal, +15°/-35° Vertical (typical)		

### Technical Specifications

#### Hard Drives

<b>60-GB 5400 rpm</b>	<b>MultiBay Drive Adapter</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.15 lb (70 g)
	<b>Drive Weight</b>	0.21 lb (99 g)	
	<b>Capacity</b>	60 GB	
	<b>Height</b>	0.74 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-5	
	<b>Transfer Rate</b>	Synchronous (maximum)	100 MB/s (Drive Capability)
		Security	ATA Security
	<b>Seek Time</b> (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	<b>Rotational Speed</b>	5400 rpm	
	<b>Logical Blocks</b>	117,210,240	
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)	
	<b>Features:</b>	Security	ATA Security

<b>40-GB 5400 rpm</b>	<b>MultiBay Drive Adapter</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.15 lb (70 g)
	<b>Drive Weight</b>	0.21 lb (99 g)	
	<b>Capacity</b>	40 GB	
	<b>Height</b>	0.74 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-5	
	<b>Transfer Rate</b>	Synchronous (maximum)	100 MB/s (Drive Capability)
		Security	ATA Security
	<b>Seek Time</b> (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	<b>Rotational Speed</b>	5400 rpm	
	<b>Logical Blocks</b>	78,140,160	
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)	
	<b>Features:</b>	Security	ATA Security

### Technical Specifications

#### Hard Drives (continued)

30-GB 4200 rpm	<b>MultiBay Drive Adapter</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.15 lb (70 g)
	<b>Drive Weight</b>	0.22 lb (99 g)	
	<b>Capacity</b>	30 GB	
	<b>Height</b>	0.374 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-5	
	<b>Transfer Rate</b>	Synchronous (maximum)	100 MB/s (Drive Capability)
		Security	ATA Security
	<b>Seek Time</b> (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
	<b>Rotational Speed</b>	4200 RPM	24 ms
	<b>Logical Blocks</b>	58,605,120	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>Features</b>	Security	ATA Security	

### Technical Specifications

<b>24X/10X/24X/8X DVD/CD-RW Combo Drive</b>	<b>MultiBay Drive</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.74 lb (0.33 kg)
	<b>Center Hole Diameter</b>	39 cm	
	<b>Disk Diameter</b>	12 cm/8 cm	
	<b>Disk Thickness</b>	1.2 mm	
	<b>Track Pitch</b>	0.74 $\mu$ m	
	<b>Access Times</b> (typical reads, including settling)	Random CD	< 150 ms
		Full-Stroke CD	< 225 ms
	<b>Audio Output Level</b>	Line-out	0.7 Vrms
	<b>Cache Buffer</b>	128 KB/s (minimum)	
	<b>Data Transfer Rate</b> (typical, including settling)	CD-R (24X)	3600 KB/s (150 KB/s at 1X CD rate)
		CD-RW (10X)	1500 KB/s (150 KB/s at 1X CD rate)
		CD-ROM (24X)	3600 KB/s (150 KB/s at 1X CD rate)
		DVD (8X)	10,800 KB/s (1352 KB/s at 1X DVD rate)
		Normal PIO Mode 4 (single burst)	16.6 MB/s
<b>Start-up Time</b>	< 15 seconds		
<b>Stop Time</b>	< 6 seconds		

<b>24X CD-RW Drive</b>	<b>MultiBay Drive</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.74 lb (0.33 kg)
	<b>Center Hole Diameter</b>	1.5 cm	
	<b>Disk Diameter</b>	12 cm/8 cm	
	<b>Disk Thickness</b>	1.2 mm	
	<b>Track Pitch</b>	0.74 $\mu$ m	
	<b>Access Times</b> (typical reads, including settling)	Random	< 150 ms
		Full-Stroke	< 225 ms
	<b>Audio Output Level</b>	Line-out	0.7 Vrms
	<b>Cache Buffer</b>	128 KB/s (minimum)	
	<b>Data Transfer Rate</b> (typical, including settling)	CD-R (24X)	3600 KB/s
		CD-RW (8X)	1200 KB/s
		CD-ROM (24X)	3600 KB/s
		Normal PIO Mode 4 (single burst)	16.6 MB/s
	<b>Start-up Time</b>	< 15 seconds	
<b>Stop Time</b>	< 6 seconds		

### Technical Specifications

<b>8X DVD-ROM Drive</b>	<b>MultiBay Drive</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.66 lb (0.3 kg)
	<b>Center Hole Diameter</b>	1.5 cm	
	<b>Disc Diameter</b>	12 cm/8 cm	
	<b>Disc Thickness</b>	1.2 mm	
	<b>Track Pitch</b>	0.74 $\mu$ m	
	<b>Access Times</b> (typical reads, including settling)	Random (typical)	< 150 ms DVD Media
		Full-Stroke (typical)	< 225 ms DVD Media
		Random (typical)	< 110 ms CD Media
		Full-Stroke (typical)	< 200 ms CD Media
	<b>Cache Buffer</b>	512 KB/s (minimum)	
	<b>Data Transfer Rate</b> (typical, including settling)	Max 24X CD	3600 KB/s (150 KB/s at 1X CD rate)
		Max 8X DVD	10,800 KB/s (1352 KB/s at 1X DVD rate)
		Normal PIO Mode 4 (single burst)	16.6 MB/s
<b>Start-up Time</b>	< 10 seconds	Single Session CD-ROM	
<b>Stop Time</b>	< 3 seconds		

<b>24X CD-ROM Drive</b>	<b>MultiBay Drive</b>	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.50 lb (0.22 kg)
	<b>Applicable Disk</b>	CD-ROM (Mode 1, 2 and 3), CD-XA ready (Mode 2, Form 1 and 2), CD-I ready (Mode 2, Form 1 and 2), CD-R (read only), CD Plus, Photo CD (Single and Multi-session), CD-Extra, Video CD, CD-WO (fixed packets only), CD-Bridge	
	<b>Center Hole Diameter</b>	15 mm	
	<b>Disk Diameter</b>	12 cm/8 cm	
	<b>Disk Thickness</b>	1.2 mm	
	<b>Track Pitch</b>	1.6 $\mu$ m	
	<b>Access Times</b> (typical reads, including settling)	Random	< 150 ms
		Full-Stroke	< 300 ms
	<b>Audio Output Level</b>	Line-out	0.7 Vrms
	<b>Cache Buffer</b>	128 KB	
	<b>Data Transfer Rate</b> (typical, including settling)	Sustained (16X)	2400 KB/s
		Variable	1500 to 3600 KB/s (10X to 24X)
		Normal PIO Mode 4 (single burst)	16.66 MB/s
	<b>Start-up Time</b>	< 8 seconds	
	<b>Stop Time</b>	< 4 seconds	

### Technical Specifications

MultiBay Diskette Drive	MultiBay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.51 lb (230 g)
	Diskette Size	3.5 in	
	Height	12.7 mm	
	Bytes per Sector	512	
	Sectors per track	High density	18 (1.44 MB)/15 (1.2 MB)
		Low density	9
	Tracks per side	High density	80 (1.44 MB)/80 (1.2 MB)
		Low density	80
	Read/Write heads	2	
	Access Times	Track-to track (high/low)	3 ms/6 ms
		Average (high/low)	94 ms/174 ms
		Settling time	15 ms
		Latency average	100 ms

### Technical Specifications

#### Audio

<b>Hardware</b>	Implementation	AC97 CODEC
	Audio Signal Link to CPU	Audio CODEC (AC) link
	Full Duplex	Yes
	Stereo Inputs	Line In - 20K Impedance (with Port Replicator only)
	Mono Inputs	Microphone - 20K Impedance
	Stereo Outputs	Headphone jack, S/PDIF from Port Replicator only

#### Audio Output Quality

Frequency Response	20 Hz - 20 kHz
Signal to Noise Ratio	>94dB
Total Harmonic Distortion	0.01%
Noise Floor	-120dB
Play/Record Sampling Rate(s)	7 kHz - 48 kHz
AD/DA Resolution	16 bit

#### Mono Speaker

Amplifier Power	2-Watts RMS
Speaker Impedance	4-Ohms

### Technical Specifications

<b>Integrated 10/100/1000 NIC</b>	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	<b>Power Management</b>	ACPI 1.1a compliant -- multiple power modes Situation-sensitive features reduce power consumption NIC Battery Saving Mode (enabled by default)
	<b>Performance Features</b>	TCP / IP / UDP Checksum Offload (configurable) Microsoft Large Send Offload (configurable) TCP Segmentation Offload CPU Task Offload Adaptive Interrupts
	<b>Manageability</b>	Wake-on-LAN from all Power-Managed States (configurable; Magic Packet and Microsoft Wake-Up Frame) PXE 2.0 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Cable Analyzer
	<b>NIC Device Driver Name</b>	Broadcom NetXtreme Gigabit Ethernet
	<b>Drivers Available</b>	Windows XP Windows 2000 Windows NT 4.0 Windows 98 Linux kernel versions 2.2 and 2.4

### Technical Specifications

<b>Agere Systems AC'97 Modem</b>	<b>Form Factor</b>	MDC
	<b>OS Support</b> (with all released Service Packs)	Windows XP (Home, Professional), Microsoft Windows 2000, Microsoft Windows 98 (Gold, SE), Windows NT 4.0, DOS Application Support under Windows
	<b>Power Management Support</b>	APM Revision 1.2, ACPI
	<b>Approvals/Certifications</b>	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	<b>Modem Device Driver Name</b>	Agere Systems AC'97 Modem
	<b>Data Mode Capabilities</b>	V.90/V.92 (a-law, mu-law) V.8bis V.80 V.44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) V.34 (file date: 10/96) <b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates <b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J (300 bps)
	<b>Fax Mode Capabilities</b>	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
	<b>Command Set</b>	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +lirr Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

### Technical Specifications

HP Integrated Wireless LAN Mini PCI 802.11a/b W500	Form Factor	MiniPCI Type III
	Weight	100 Grams (max)
	Operating Temperature	Operating 14° to 149° F (-10° to 65° C)
	Storage Temperature	Non-operating -40° to 176° F (-40° to 80° C)
	Humidity	Operating 10 to 90%
		Non-operating 5 to 95%
	Altitude	Operating 0 to 15,000 ft (4,572 m)
		Non-operating 0 to 40,000 ft (12,192 m)
	RF Network Standard	IEEE 802 Part 11a (802.11a) IEEE 802. Part 11b (802.11b) Compliant with draft 802.11g* <b>NOTE:</b> *Driver/Firmware update is expected 4Q03. User can download update from the HP website
	Frequency Band	4.9 -4.95 GHz (New Japan Limits Pending) 5.15 – 5.25 GHz, U-NII Lower Band (Japan/USA/Canada) 5.25 – 5.35 GHz, U-NII Middle Band (USA/Canada/Europe) 5.45 – 5.725 GHz (Europe) 5.725 – 5.825 GHz, U-NII Upper Band (USA/Canada) 5.825 - 5.850 GHz (USA) 2.4000 to 2.497 GHz (2.4 GHz ISM Band)
	Number of Selectable Sub-channels	<b>Worldwide Certification – 802.11a/b</b>  Japan (JP) 802.11a = 45 non overlapping channels 802.11b = 14 channels, 3 non-overlapping  Europe 802.11a = 19 non-overlapping channels 802.11b = 13 channels, 3 non-overlapping  United States (FCC) 802.11a = 12 non-overlapping channels 802.11b = 11 channels, 3 non-overlapping
	Data Rates	802.11a: 6, 9, 12, 24, 36, 48, 54Mbps 802.11b: 1, 2, 5.5, 11 Mbps
	Antenna type	Internal (with spatial pattern and polarization diversity)
	Antenna Polarization	Linear
	Antenna Efficiency	65% +/- 10%
	Configuration Utility	Choice of Configuration Utility: <ul style="list-style-type: none"> <li>Single Configuration Utility for all Operating Systems (works with Cisco Infrastructure)</li> <li>Windows XP Zero Configuration Utility</li> </ul>
	Roaming	IEEE 802.11 compliant roaming between 802.11a and 802.11b access points Module checks signal strength, packet error rates and latency to automatically connect to the access point offering the best throughput.
	Security	64 bit encryption keys compliant to IEEE 802.11 Standard 128 bit encryption key compliant to WiFi Standard Advanced Encryption Standard (AES) Support in Hardware Ability to function in an 802.1x security environment using: <ul style="list-style-type: none"> <li>Microsoft 802.1x client; supports EAP-TLS, PEAP on XP and 2K.</li> <li>Approved Cisco Compatibility Extension Product (*); Support via Single Configuration Utility; support for LEAP and CKIP</li> <li>EAP-TTLS support via web release with Odyssey Client Utility available on the web</li> <li>Supports for TKIP (Temporal Key Integrity Protocol)</li> </ul> (*)Cisco Compatibility Extension Program: The Cisco Compatible Extensions program ensures proven interoperability with Cisco wireless LAN infrastructure products.
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Modulation Technique	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Receiver Sensitivity – Bit Error Rate (1E-5)	54 Mbps: -73 dBm to 1 Mbps: -94 dbm

### Technical Specifications

<b>HP Integrated Wireless LAN Mini PCI 802.11a/b W500</b>	<b>Maximum Receive Level</b>	802.11a: -30 dBm (with PER <8%) 802.11b: -4 dBm (with PER <8%)	
	<b>Output Power (approximately)</b>	18 dBm +/-2 dB	
	<b>Image Rejection</b>	60 dB (with PER <8%)	
	<b>IF Rejection</b>	100 dB (with PER <8%)	
	<b>Operating Voltage</b>	5 V power operation	
	<b>Power Management</b>	Wireless Button Power On/Off control	
	<b>Power Consumption</b>	Transmit State – 2.0 Watts (Max)	
		Receive State - 1.5 Watts (Max)	
		802.11 Power save Mode State – 0.75 Watts (Max)	
		Standby State – 20 mwatts (Max)	
	<b>Power Management</b>	802.11 Compliant Power Saving	
		Power Saving Mode selectable through the configuration utility	
		ACPI compliant power management	
	<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK	
	<b>OS Support</b>	Microsoft Windows 2000	
		Microsoft Windows XP Home and Pro	
	<b>LED Activity</b>	LED Off – Radio OFF	
		Solid LED - ON	
		LED Off – Power Off	
	<b>Throughput, Data Rate and Operating Distance</b>	<b>Operating Distance</b>	
		802.11a - Typical	1000 feet – Outdoors Open Area
			300 feet – Indoor, Office environment
		802.11 b - Typical	1200 feet – Outdoor Open Area
	300 feet – Indoor, Office environment		

### Technical Specifications

HP Integrated Wireless LAN Mini PCI 802.11b W400	<b>Form Factor</b>	MiniPCI Type III
	<b>Weight</b>	100 Grams (max)
	<b>Operating Temperature</b>	Operating 14° to 149° F (-10° to 65° C)
	<b>Storage Temperature</b>	Non-operating -40° to 176° F (-40° to 80° C)
	<b>Humidity</b>	Operating 10% to 90%
		Non-operating 5% to 95%
	<b>Altitude</b>	Operating 0 to 15,000 ft (4,572 m)
		Non-operating 0 to 40,000 ft (12,192 m)
	<b>RF Network Standard</b>	IEEE 802. Part 11b (802.11b) Compliant with draft 802.11g* <b>NOTE: *Driver/Firmware update is expected 4Q03. User can download update from the HP website</b>
	<b>Frequency Band</b>	2.4000 to 2.497 GHz (2.4 GHz ISM Band)
	<b>Number of Selectable Sub-Channels</b>	<b>Worldwide Certification – 802.11b</b>
		United States (FCC) – 11 Channels, 3 non-overlapping
		Japan (JP) – 14 Channels, 3 non-overlapping
		Europe – 13 Channels, 3 non-overlapping
	<b>Data Rates</b>	802.11a: 6, 9, 12, 24, 36, 48, 54Mbps 802.11b: 1, 2, 5.5, 11 Mbps
	<b>Antenna Type</b>	Internal (with spatial pattern and polarization diversity)
	<b>Antenna Polarization</b>	Linear
	<b>Antenna Efficiency</b>	65% +/- 10%
	<b>Configuration Utility</b>	Choice of Configuration Utility: <ul style="list-style-type: none"> <li>• Single Configuration Utility for all Operating Systems (works with Cisco Infrastructure)</li> <li>• Windows XP Zero Configuration Utility</li> </ul>
	<b>Roaming</b>	IEEE 802.11 compliant roaming between 802.11a and 802.11b access points. Module checks signal strength, packet error rates and latency to automatically connect to the access point offering the best throughput.
	<b>Security</b>	64 bit encryption keys compliant to IEEE 802.11 Standard
		128 bit encryption key compliant to WiFi Standard
		Advanced Encryption Standard (AES) Support in Hardware
		Ability to function in an 802.1x security environment using: <ul style="list-style-type: none"> <li>• Microsoft 802.1x client; supports EAP-TLS, PEAP on XP and 2K.</li> <li>• Approved Cisco Compatibility Extension Product (*); Support via Single Configuration Utility; support for LEAP and CKIP</li> <li>• EAP-TTLS support via web release with Odyssey Client Utility available on the web</li> <li>• Supports for TKIP (Temporal Key Integrity Protocol)</li> </ul>
		(*Cisco Compatibility Extension Program: The Cisco Compatible Extensions program ensures proven interoperability with Cisco wireless LAN infrastructure products.
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer)
		Infrastructure (Access Point Required)
	<b>Modulation Technique</b>	Direct Sequence Spread Spectrum
		DBPSK, DQPSK, CCK, OFDM
	<b>Receiver Sensitivity – Bit Error Rate (1E-5)</b>	54 Mbps: -73 dBm to 1 Mbps: -94 dbm

### Technical Specifications

<b>Bluetooth by HP</b>	<b>Form Factor</b>	Integrated USB module		
	<b>Bluetooth</b>	1.1 Compliant		
	<b>Dimensions</b>	26 x 14 x 5.7 mm		
	<b>Temperature</b>	Operating	-4° to 158° F ( -20° to 70° C)	
		Non-operating	-40° to 176° F (-40° to 80° C)	
	<b>Humidity</b>	10 to 90% operating		
		5 to 95% non operating		
	<b>Altitude</b>	Operating	15,000 ft (4572 m)	
		Non-operating	40,000 ft (12192 m)	
	<b>Plug and Play</b>	USB 1.1 compliant		
		Microsoft Windows Plug and Play compliant		
	<b>Frequency Band</b>	2402 to 2480 MHz		
	<b>Number of Available Channels</b>	79 (1 MHz) available channels		
	<b>Data Rates and throughput</b>	1 Mbps		
		Synchronous Connection Oriented links up to 3, 64 kbps, voice channels		
		Asynchronous Connection Less links 723.2 kbps/57.6 kbps asymmetric or 433.9 kbps symmetric		
	<b>Antenna type</b>	Internally integrated within module		
	<b>Range</b>	33 ft (10 m)		
	<b>OS Support</b>	Microsoft Windows XP Professional and Home		
		Microsoft Windows 2000		
	<b>Software Stack Supported</b>	User may choose:		
		Microsoft User Interface (Profiles supported: HID, DUN, HCRP)		
		Widcomm User Interface (see profile support below)		
<b>Profile Support</b>	General Access Profile			
	Service Discovery Application Profile			
	Serial Port Profile			
	Generic Object Exchange Profile			
	File Transfer Profile			
	Synchronization Profile			
	Dial-Up Networking Profile			
	LAN Access Profile			
	Object Push Profile			
	Hard Copy Cable Replacement Profile			
	Personal Area Networking Profile			
Human Interface Device Profile				

### Technical Specifications

Bluetooth by HP (continued)	Usage Models	Service Discovery (determine what Bluetooth devices are within range and support authorization)
		<b>Synchronization:</b> PDAs to PCs Portable to Desktop
		<b>File Transfer:</b> File and directory browsing and navigation on another Bluetooth device. File copying Object manipulation – including add, delete, create new folders etc. Wireless link to Corporate LAN using several Bluetooth devices sharing the same
		<b>Access Point:</b> Corporate email, network neighborhood, access to LAN applications, file transfer, ftp, Internet browsing, etc, using TCP/IP Wireless link to WAN thru cell phone Agnostic to WAN technology Send/receive SMS messages Wireless link to Printer Adhoc peer to peer networking (two computers) or Personal Area Networking (PAN) using NDIS (< 7 computers) Adhoc Bluetooth Pico-networking (point to multi-point) Object Push – Business card or appointment exchange
		<b>Human Interface Devices</b> Wirelessly interface to notebook with mouse, keyboard, etc
		<b>Printing</b> Wirelessly print to Bluetooth enabled printers
	<b>Transmit Power</b>	-6dBm to 4 dBm (Bluetooth Class II)
	<b>Receive Sensitivity</b>	Better than -80 dBm at 0.1 % raw bit error rate
	<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves
	<b>Security</b>	Full support of Bluetooth Security Provisions
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer)
		Infrastructure (Access Points Required)
	<b>Power Requirement</b>	Peak < 270 mW
	<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support
		Wireless EAB On/Off
		Software On/Off control
		Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

### Technical Specifications

Bluetooth by hp <i>(continued)</i>	Protocols Supported	TCP/IP
		IPX/SPX
		UDP
LED Activity	Solid Blue LED – On LED Off – Power Off	
Certifications	All necessary regulatory approvals for countries we support including	
	FCC (47 CFR) Part 15C, Section 15.247 & 15.249	
	ETS 300 328, ETS 300 826	
	Low Voltage Directive IEC950	
	UL, CSA, and CE Mark	

### HP recommends Microsoft® Windows® XP Professional for Mobile Computing

Copyright ©2003 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows NT are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Pentium, the Intel Inside Logo, and SpeedStep are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of Bluetooth SIG, Inc., in the U.S. and other countries. BatteryMark is a trademark of Ziff Davis Publishing Holdings Inc., and affiliate of eTesting Labs Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.