


From the world market leader in mobile PCs: the Satellite 4030 Series.

Satellite 4030CDS/CDT

- 300 MHz Intel Celeron™ processor
- 4.32 billion byte hard disk
- Integrated diskette and 24-speed CD-ROM drive
- Built-in V.90 data and fax modem
- 13.0" DSTN (CDS) or 13.3" TFT (CDT) screen

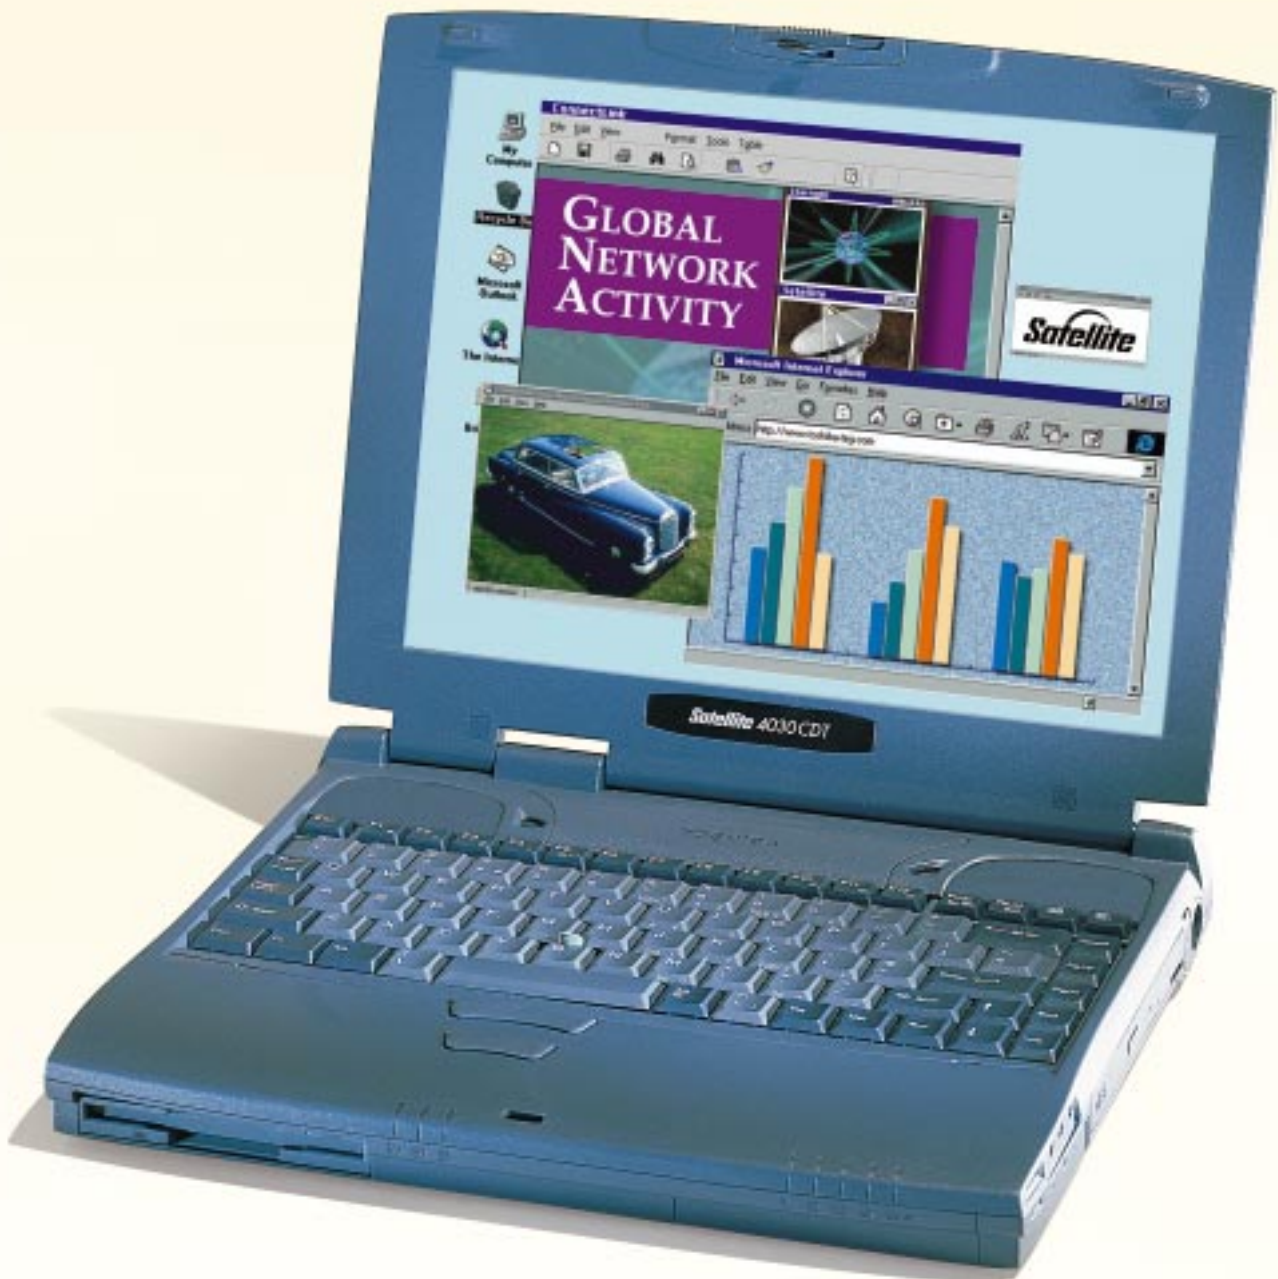

In Touch with Tomorrow
TOSHIBA



Take it from Toshiba. Now it's even easier to get started in the world of notebook computing: with the new Satellite 4030CDS/CDT. You not only get a 300 MHz Intel Celeron™ processor and integrated diskette and 24-speed CD-ROM drive, but also a built-in V.90 data and fax modem. Everything in a sharp new design, with a 13.0" DSTN (CDS) or 13.3" TFT (CDT) colour screen – you'll always get brilliant, clear images. As you'll discover when you get down to your nearest Toshiba dealer.



Always in the picture: Whether it's a 13.0" DSTN (CDS) or 13.3" TFT (CDT) colour screen – you'll always get brilliant, clear images.



Moving mountains: with the new options – the Port Replicator and the spacer, which offers connections to the Card Station III – you're equipped for everything.



It all comes down to communication: thanks to the integrated V.90 data and fax modem, you're always in touch wherever you are. Whether by Internet or by fax.



Off to a flying start: with the standard, built-in diskette and CD-ROM drive, you've got versatile data access right from the start.

Processor

Intel® Celeron™ processor, 300 MHz int./66 MHz ext., 1.6 volt core using Voltage Reduction Technology, 32 KB cache on chip, PCI architecture

Memory

Standard 64 MB SDRAM, expandable to 192 MB, 128 KB 2nd level cache

Hard disk

4.32 billion byte capacity (4.0 GB)

Diskette drive

3.5" 1.44 MB/720 KB, simultaneous internal use with the CD-ROM drive

CD-ROM drive

24-speed (max), 12 cm (5.25") and 8 cm (3.5") disks, Data transfer: 3,600 KB/sec, Average random access time: 130 ms

Display

4030CDS : 13.0" DSTN colour screen
4030CDT : 13.3" TFT colour screen

Graphics adapter

Trident Cyber 9525 SVGA, dual display mode, PCI Bus, BitBIT 64-bit graphics accelerator, 3D acceleration, 2.5 MB Video RAM

Internal video mode

4030CDS:
800 x 600 x 16.7 million colours
4030CDT:
1,024 x 768 x 65,536 colours

External video modes

640 x 480 x 16.7 mill. colours
800 x 600 x 16.7 mill. colours
1024 x 768 x 65,536 colours
1280 x 1024 x 256 colours
Up to 85 Hz refresh rate non interlaced

Keyboard

86 keys with integrated MousePoint, 12 function keys, 8 dedicated cursor keys, inlaid numeric keypad, 8 Hot Keys, 2 Windows keys, Euro key

Sound system

Toshiba Bass Enhanced Sound System, Sound Blaster Pro compatible, MIDI & WAVE support, 3D Wide mode, FM & Wavetable synthesis, built-in stereo speakers

BIOS

DMI 2.0, APM 1.2, PnP 1.0, DPMS, VESA 2.0, DDC2B

Interfaces

Infrared port (FIR), serial, parallel, PS/2 mouse / keyboard, line-in, RGB port, USB port, headphone, external microphone

Expansion

2 x PC Card Type II or 1 x PC Card Type III, CardBus, memory expansion

Communication

Integrated V.90 data & fax modem (56 K data, 14.4 K fax)

Power supply

Autosensing 100–240 V AC adaptor for world-wide usage

Battery

Removable lithium-ion battery, 3–3.5 hrs battery life

Size and Weight

CDS: 309 x 259 x 42.2 mm,
CDT: 309 x 259 x 41.7 mm,
3.2 kg (7 lbs)

Bundled software

Windows® 95 or Windows® 98 selectable installation, other Microsoft operating systems upon request, Toshiba utilities and drivers, all pre-installed on the hard disk

Special features

Toshiba Power Extensions, Toshiba Hibernation utility, Hardware Setup, TSETUP, Password Security, Secure Sleep, 1 year International Warranty

Options

Carrying case, extra battery packs, battery charger, 32/64/128 MB memory modules, Port Replicator, Card Station III Spacer, Card Station III (via Spacer)

TOSHIBA