


## Overview

### AT A GLANCE

- All-in-one form factor with three spindle support
- Intel Mobile Pentium® II processor up to 400 MHz
- AGP (Accelerated Graphics Port) Implementation with 4-MB SGRAM
- Up to 14.1-inch CTFT display supporting resolutions up to 1024 x 768
- 64-MB standard SDRAM, expandable up to 192 MB
- MultiBay supports additional battery, second hard drive, floppy diskette drive (standard), SuperDisk LS-120 Drive or Zip Drive
- Shock Mounted Hard Drives and Spill Resistant Keyboard
- Up to 10-GB<sup>1</sup> upgradable SMART Hard Drives
- Internal 24X Max<sup>2</sup> CD-ROM Drive upgradable to DVD-ROM
- Integrated 56K V.90<sup>3</sup> Modem
- Sound Blaster Pro-compatible with 16-bit stereo Compaq Premier Sound™, integrated speakers and microphone
- Intelligent Manageability for lower total cost of ownership
- Optional Pass-Through or Ethernet Convenience Bases
- Compaq Services, including a one-year, Worldwide Limited Warranty<sup>4</sup> with second business day<sup>5</sup> expedited pick-up and repair in North America

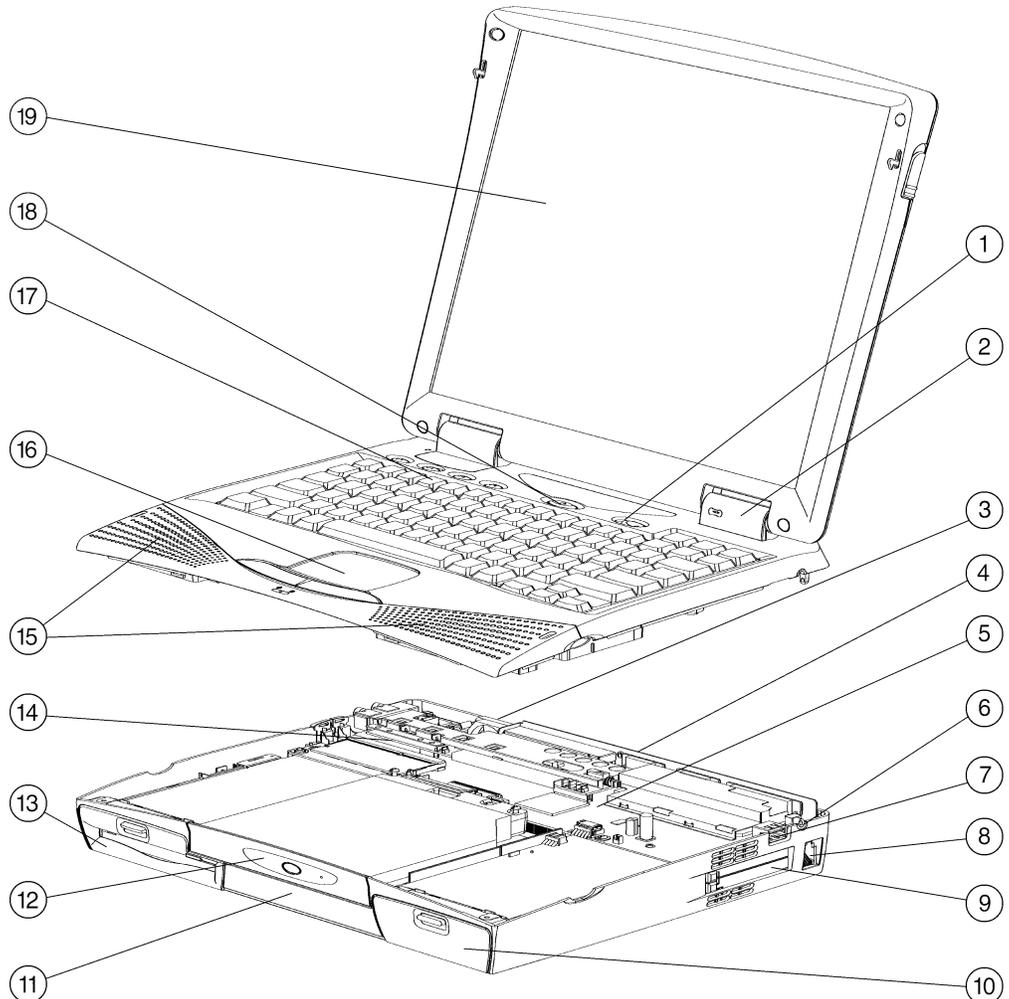

1. Power Button
2. Microphone
3. 4 MB/s<sup>6</sup> Infrared Communication Port
4. Integrated AC Adapter
5. Processor Board
6. TV Out
7. USB Port
8. Integrated 56K V.90<sup>3</sup> Worldwide Modem
9. Two Type II/One Type III PC Card Slots; CardBus-capable<sup>7</sup>
10. Li-Ion Battery Pack
11. Upgradable SMART Hard Drive
12. 24X Max<sup>2</sup> CD-ROM Drive upgradable to DVD-ROM Drive
13. MultiBay (supports additional battery, second Hard Drive, Zip Drive, SuperDisk LS-120 Drive, Floppy Drive)
14. Memory Slot
15. Stereo Speakers
16. Touchpad Pointing Device
17. Full-size Keyboard with Four User-Programmable Keys
18. Stand-by Button
19. Display

## Standard Features

### MODELS

#### Windows NT Workstation 4.0

6400/14T/10GB/D/M/3  
316590-006

6366/14T/6.4GB/D/M/3  
316570-006

6333/14T/6.4GB/D/M/3  
120398-006

6333/13T/6.4GB/D/M/3  
316550-006

6333/12T/4GB/D/M/3  
129012-006

6300/13T/4GB/D/M/3  
316530-006

#### Windows 95

6400/14T/10GB/D/M/1  
316590-002

6366/14T/6.4GB/D/M/1  
316570-002

6333/14T/6.4GB/D/M/1  
120398-002

6333/13T/6.4GB/D/M/1  
316550-002

6333/12T/4GB/D/M/1  
129012-002

6300/13T/4GB/D/M/1  
316530-002

### All-in-one Design

Armada 1750 is ideal for customers who are searching for a convenient, fully integrated notebook design and need the latest key technologies. All-in-one design includes integrated Diskette Drive, Hard Drive, CD-ROM Drive, modem and AC Adapter, providing full functionality in the office or on the road. MultiBay supports diskette drive, second hard drive, second battery, SuperDisk LS-120 Drive or Zip drive for additional flexibility.

### Processor

Intel Mobile Pentium II processor 400 MHz

6400/14T/10GB/D/M/3  
6400/14T/10GB/D/M/1

Intel Mobile Pentium II processor 366 MHz

6366/14T/6.4GB/D/M/3  
6366/14T/6.4GB/D/M/1

Intel Mobile Pentium II processor 333 MHz

6333/14T/6.4GB/D/M/3  
6333/14T/6.4GB/D/M/1  
6333/13T/6.4GB/D/M/3  
6333/13T/6.4GB/D/M/1  
6333/12T/4GB/D/M/3  
6333/12T/4GB/D/M/1

Intel Mobile Pentium II processor 300 MHz

6300/13T/4GB/D/M/3  
6300/13T/4GB/D/M/1

### Cache Memory

Integrated 256 KB

### Memory

Standard	64 MB
Maximum	192 MB

### Communications

Integrated 56K V.90<sup>3</sup> Worldwide Modem

### Keyboard

Spill resistant 101/102-key compatible keyboard with isolated, inverted-T cursor control keys, and right-control key, four user-programmable keys, special feature hotkeys for instant access to power conservation, QuickLock/QuickBlank, toggle between internal and external, or simultaneous displays, battery gauge, speaker volume control, brightness and contrast

### Pointing Device

Touchpad

### PC Card Slots

Two Type II/One Type III PC Card Slot(s) which support both 32-bit CardBus<sup>7</sup> and 16-bit PC Cards; zoomed video support in bottom slot only

## Standard Features

### Storage

Removable Diskette Drive 1.44 MB

CD-ROM 24X Max<sup>2</sup> CD-ROM Drive (optional DVD)

#### Hard Drives

##### 10.0-GB<sup>1</sup> SMART

6400/14T/10GB/D/M/3  
6400/14T/10GB/D/M/1

##### 6.4-GB<sup>1</sup> SMART

6366/14T/6.4GB/D/M/3  
6366/14T/6.4GB/D/M/1  
6333/14T/6.4GB/D/M/3  
6333/14T/6.4GB/D/M/1  
6333/13T/6.4GB/D/M/3  
6333/13T/6.4GB/D/M/1

##### 4-GB<sup>1</sup> SMART

6333/12T/4GB/D/M/3  
6333/12T/4GB/D/M/1  
6300/13T/4GB/D/M/3  
6300/13T/4GB/D/M/1

### Multimedia

Compaq *Premier*•*Sound* for enhanced stereo audio, including integrated 16-bit Sound Blaster Pro-compatible stereo audio, integrated acoustic bass reflex stereo speakers with 2-Watt/channel amplifier and four stage EQ; microphone, software/hardware volume control, headphone out, microphone in jacks support, internal 24X Max<sup>2</sup> CD-ROM Drive

### Interfaces

PC Card Two Type II/One Type III  
Enhanced Parallel 1  
Serial 1  
External Monitor 1  
External Keyboard/  
Pointing Device 1  
Convenience Base 1  
Headphone/Line-out 1  
Microphone 1  
AC Power 1  
RJ-11 1  
Infrared 1 (4 Mb/s<sup>6</sup> support)  
USB 1

### Graphics

Industry-leading AGP graphics with 4-MB SGRAM for increased color depth and graphics performance

## Standard Features

### Display

---

14.1-inch color TFT with 1024 x 768 resolution (up to 16.7M colors internal)

6400/14T/10GB/D/M/3  
6400/14T/10GB/D/M/1  
6366/14T/6.4GB/D/M/3  
6366/14T/6.4GB/D/M/1  
6333/14T/6.4GB/D/M/3  
6333/14T/6.4GB/D/M/1

---

13.3-inch color TFT with 1024 x 768 resolution (up to 16.7M colors internal)

6333/13T/6.4GB/D/M/3  
6333/13T/6.4GB/D/M/1  
6300/13T/4GB/D/M/3  
6300/13T/4GB/D/M/1

---

12.1-inch color TFT with 1024 x 768 resolution (up to 16.7M colors internal)

6333/12T/4GB/D/M/3  
6333/12T/4GB/D/M/1

### Software

---

Windows NT Workstation 4.0  
Insight Management Agents  
Intelligent Manageability  
Security 32  
Diagnostics for Windows NT  
Compaq Power Management  
Online Safety and Comfort Guide  
Reference Guide  
Carbon Copy

6400/14T/10GB/D/M/3  
6366/14T/6.4GB/D/M/3  
6333/14T/6.4GB/D/M/3  
6333/13T/6.4GB/D/M/3  
6333/12T/4GB/D/M/3  
6300/13T/4GB/D/M/3

---

Windows 95  
Insight Management Agents  
Intelligent Manageability  
Security 32  
Diagnostics for Windows 95  
Compaq Power Management  
Online Safety and Comfort Guide  
Reference Guide  
Carbon Copy

6400/14T/10GB/D/M/1  
6366/14T/6.4GB/D/M/1  
6333/14T/6.4GB/D/M/1  
6333/13T/6.4GB/D/M/1  
6333/12T/4GB/D/M/1  
6300/13T/4GB/D/M/1

### OS Support

---

Windows NT Workstation 4.0  
Windows 98  
Windows 95

---

## Standard Features

---

### Intelligent Manageability

---

Lowers total cost of ownership by providing enhanced security, asset management, and fault prediction with SMART drives; also provides SMART drive alert, battery fault alert, thermal alert and memory alert for investment and data protection

---

### Security

---

Cable lock support  
Power-on password  
Set-up passwords  
Ability to disable serial port, parallel port, diskette drive, diskette drive boot sequence  
Drive Lock for advanced data protection

---

### Power

---

Integrated AC Adapter for less bulky transportation; 10-foot power cord included

---

### Battery

---

Li-Ion, providing up to two and a half hours of battery life<sup>8</sup> supported with one battery; a second battery can be supported in the MultiBay for additional battery life

---

### Power Conservation

---

Hibernation, Instant-On via Standby; pop-ups with three presets and one custom level of power conservation; ACPI hardware ready

---

### Service and Support

---

Compaq Services provides a range of services for the Armada 1750, including a one-year, Limited Warranty<sup>4</sup>, with 7 x 24 service line at 1-800-OK-Compaq (1-800-652-6672) and a free, one-year, second business day<sup>5</sup> pick-up and delivery service from Compaq. All shipping and handling materials are supplied by Compaq.

# QUICK SPECS

Compaq Armada 1750

## Options

### Memory

128-MB Memory Upgrade	315177-B21
64-MB Memory Upgrade	314891-B21
32-MB Memory Upgrade	314890-B21

### Monitors<sup>9</sup>

TFT8000 Flat Panel	307906-001
TFT5000 Flat Panel	325700-001
P1100 Color <sup>10</sup>	325606-001
P900 Color	386326-001
P700 Color	380207-001
P110 Color <sup>10</sup>	325600-001
P75 Color	307806-001
V1100 Color <sup>10</sup>	386472-001
V1000 Color <sup>10</sup>	351757-001
V900 Color <sup>10</sup>	303500-001
V700 Color (Opal)	325800-001
V75 Color (Carbon)	307710-002
V500 Color	325900-001
S910 Color <sup>10</sup>	138485-001
S900 Color <sup>10</sup>	360562-001
S710 Color	152991-001
S700 Color	360512-001

### Hard Drives

10-GB <sup>1</sup> SMART Hard Drive	388446-B21
6.4-GB <sup>1</sup> SMART Hard Drive	310313-B21
5-GB <sup>1</sup> SMART Hard Drive	316248-B21
4-GB <sup>1</sup> SMART Hard Drive	316247-B21

### MultiBay Options

lomega Zip Drive	316311-B21
SuperDisk LS-120 Drive	316257-B21
DVD-ROM Drive Kit	316258-B21

### PC Cards/Communications

Compaq Microcom Global 420 56K v.90 <sup>3</sup> PC Card Fax Modem	317900-001
Compaq Microcom 550 56K v.90 <sup>3</sup> + 10/100 Ethernet Combo Card	321550-001
10/100 TX PC Card UTP Controller	335506-B21
10 T PC Card UTP Controller	292806-B21
100 BaseTX Ethernet Upgrade	225435-001
16/4 TR PC Card IBM UTP/STP Controller	301208-B21

### Convenience Bases

Armada Convenience Base II with USB (Ethernet) <sup>11</sup>	316239-001
Armada Convenience Base II with USB (Pass-Through) <sup>11</sup>	316238-001
Monitor Stand-Conversion Kit <sup>12</sup>	316246-B21

### Power

Li-Ion Battery	316237-B21
External Battery Charger	254938-B21
Auto/Aircraft Adapter	296537-B21
AC Line Cord (10-ft)	217932-002

### Input Devices

External Infrared Transceiver	220687-002
External Enhanced III Keyboard (opal)	294343-001
External Enhanced III Keyboard (carbon)	118003-008
Compaq Mouse (opal)	143315-B21
Compaq Mouse (carbon)	103180-B21

### Other

Security Lock	294316-B21
Portable Video Conferencing Kit	296954-001
Armada Headset with microphone	220460-001
Universal Monitor Stand	294315-B21
Margi DVD To Go Playback PC Card	202861-B21

### Carrying Cases

CPQ Value Case	294266-B21
CPQ Workstation Case	294267-B21
CPQ Global Case	294268-B21
CPQ Professional Case (Nylon)	401366-B21
CPQ Professional Case (Leather)	401367-B21

For additional Compaq Brand cases, call  
1-800-888-5903.

## Memory

### Compaq Armada 1750

#### STANDARD MEMORY

64 MB installed on the System Board (1 slot available)

Standard	Slot
64 MB	1 Empty

#### STANDARD MEMORY PLUS OPTIONAL MEMORY

Support for up to 192 MB of SDRAM is available with the installation of an optional memory upgrade.

Up To	Slot
96 MB	1 32 MB
128 MB	64 MB
192 MB	128 MB

Following are memory options available from Compaq:

- 128-MB Memory Upgrade 315177-B21
- 64-MB Memory Upgrade 314891-B21
- 32-MB Memory Upgrade 314890-B21

## Storage



- 1 MultiBay
- 2 CD-ROM Drive Bay
- 3 Upgradable Hard Drive

### DRIVE SUPPORT

	Quantity Supported	Drive Bay Supported
<b>Removable Media</b>		
1.44-MB Diskette Drive	Up to 1	MultiBay
SuperDisk LS-120 Drive	Up to 1	MultiBay
Second Hard Drive	Up to 1	MultiBay
Zip Drive	Up to 1	MultiBay
24X Max <sup>2</sup> CD-ROM Drive (optional DVD)	Up to 1	CD-ROM Drive Bay
<b>Hard Drives</b>		
10-GB <sup>1</sup> SMART Hard Drive	Up to 1	Upgradable Hard Drive
6.4-GB <sup>1</sup> SMART Hard Drive	Up to 1	Upgradable Hard Drive
5-GB <sup>1</sup> SMART Hard Drive	Up to 1	Upgradable Hard Drive
4-GB <sup>1</sup> SMART Hard Drive	Up to 1	Upgradable Hard Drive

## Technical Specifications

### System Unit

<b>Dimensions (HxWxD)</b>	9.9 x 12.5 x 2.3 in/25.1 x 31.8 x 31.2 cm
<b>Weight</b>	
6400/14T/6.4GB/D/M/3	8.37 lbs/3.8 kg
6400/14T/6.4GB/D/M/1	8.37 lbs/3.8 kg
6366/14T/6.4GB/D/M/3	8.37 lbs/3.8 kg
6366/14T/6.4GB/D/M/1	8.37 lbs/3.8 kg
6333/14T/6.4GB/D/M/3	8.3 lbs/3.77 kg
6333/14T/6.4GB/D/M/1	8.3 lbs/3.77 kg
6333/13T/6.4GB/D/M/3	8.49 lbs/3.85 kg
6333/13T/6.4GB/D/M/1	8.49 lbs/3.85 kg
6333/12T/4GB/D/M/3	8.49 lbs/3.85 kg
6333/12T/4GB/D/M/1	8.49 lbs/3.85 kg
6300/13T/4GB/D/M/3	8.49 lbs/3.85 kg
6300/13T/4GB/D/M/1	8.49 lbs/3.85 kg
<b>Stand-Alone Power Requirements</b>	
Nominal Operating Voltage (Li-Ion)	14.2 VDC
Maximum Operating Power	45W
Peak Operating Power	50W
<b>Temperature</b>	
Operating	5° to 95°F/10° to 35°C
Non-operating	-4° to 140°F/-20° to 60°C
<b>Relative Humidity (non-condensing)</b>	
Operating	10% to 90%
Non-operating	5% to 95%
<b>Shock</b>	
Operating	10 G, 11 ms, half-sine
Non-operating	60 G, 11 ms, half-sine
<b>Vibration</b>	
Operating	0.25 G, 1 Oct/Min sweep rate
Non-operating	1 G, 1 Oct/Min sweep rate
<b>Maximum Altitude (unpressurized)</b>	
Operating	10,000 ft/3,048 m
Non-operating	30,000 ft/9,144 m

## Technical Specifications

### 14.1-Inch Color TFT 1024 x 768 Display

<b>Dimensions (HxW)</b>	8.92 x 11.75 in/22.66 x 29.84 cm
<b>Diagonal Size</b>	14.1 in/35.8 cm
<b>Mounting</b>	Internal
<b>Number of Colors</b>	16.7M
<b>Contrast Ratio</b>	Minimum 100:1
<b>Brightness</b>	Over 120 cd/m <sup>2</sup>
<b>Pixel Resolution</b>	
Pitch	0.279 x 0.279 mm
Format	1024 x 768
Configuration	RGB stripe
<b>Backlight</b>	Edge Lit
<b>Character Display</b>	80 x 25
<b>Total Power Consumption (maximum)</b>	7W

### 13.3-Inch Color TFT 1024 x 768 Display

<b>Dimensions (HxW)</b>	7.9 x 10.6 in/20.1 x 26.9 cm
<b>Diagonal Size</b>	13.3 in/33.8 cm
<b>Mounting</b>	Internal
<b>Number of Colors</b>	16.7M
<b>Contrast Ratio</b>	Minimum 100:1
<b>Brightness</b>	Over 120 cd/m <sup>2</sup>
<b>Pixel Resolution</b>	
Pitch	0.264 x 0.264 mm
Format	1024 x 768
Configuration	RGB stripe
<b>Backlight</b>	Edge Lit
<b>Character Display</b>	80 x 25
<b>Total Power Consumption (maximum)</b>	7W

### 12.1-Inch Color TFT 800 x 600 Display

<b>Dimensions (HxW)</b>	7.24 x 9.7 in/18.4 x 24.6 cm
<b>Diagonal Size</b>	12.1 in/30.7 cm
<b>Mounting</b>	Internal
<b>Number of Colors</b>	16.7M
<b>Contrast Ratio</b>	100:1
<b>Brightness</b>	Over 120 cd/m <sup>2</sup> (typical)
<b>Pixel Resolution</b>	
Pitch	0.3 x 0.3 mm
Format	800 x 600
Configuration	RGB stripe
<b>Backlight</b>	Edge Lit
<b>Character Display</b>	80 x 25, 80 x 50
<b>Total Power Consumption (maximum)</b>	6W (maximum)

# QUICKSPECS

Compaq Armada 1750

## Technical Specifications

### Hard Drives

<b>10 GB<sup>1</sup></b>	<b>Capacity</b>	10 GB	<b>Seek Time</b> (typical reads, including settling)	
	<b>Height</b>	0.5 in/12.7 mm	Single Track	4 ms
	<b>Width</b>	2.5 in/63.5 mm	Average	13 ms
	<b>Interface</b>	ATA	Full-Stroke	23 ms
	<b>Transfer Rate</b>		Rotational Speed	4,200 rpm
	Synchronous (Maximum)	33.3 MB/s	<b>Physical Configuration</b>	
			Bytes/sector	512
			<b>Operating Temperature</b>	41° to 131°F/5° to 55°C

<b>6.4 GB<sup>1</sup></b>	<b>Capacity</b>	6.4 GB	<b>Seek Time</b> (typical reads, including settling)	
	<b>Height</b>	0.5 in/12.7 mm	Single Track	4 ms
	<b>Width</b>	2.5 in/63.5 mm	Average	13 ms
	<b>Interface</b>	ATA	Full-Stroke	23 ms
	<b>Transfer Rate</b>		Rotational Speed	4,200 rpm
	Synchronous (Maximum)	33.3 MB/s	<b>Physical Configuration</b>	
			Bytes/sector	512
			<b>Operating Temperature</b>	41° to 131°F/5° to 55°C

<b>4 GB<sup>1</sup></b>	<b>Capacity</b>	4 GB	<b>Seek Time</b> (typical reads, including settling)	
	<b>Height</b>	0.5 in/12.7 mm	Single Track	4 ms
	<b>Width</b>	2.5 in/63.5 mm	Average	13 ms
	<b>Interface</b>	ATA	Full-Stroke	23 ms
	<b>Transfer Rate</b>		Rotational Speed	4,200 rpm
	Synchronous (Maximum)	33.3 MB/s	<b>Physical Configuration</b>	
			Bytes/sector	512
			<b>Operating Temperature</b>	41° to 131°F/5° to 55°C

### Diskette Drive

<b>Diskette Size</b>	3.5 inch
<b>Light</b>	None
<b>Height</b>	0.82 in/2.08 cm
<b>Bytes per Sector</b>	512
<b>Sectors per track</b>	
High density	18 (1.44 MB)/15 (1.2 MB)
Low density	9
<b>Tracks per side</b>	
High density	80 (1.44 MB)/80 (1.2 MB)
Low density	80
<b>Read/Write heads</b>	2
<b>Access Times</b>	
Track-to track (high/low)	3 ms/6 ms
Average (high/low)	94 ms/174 ms
Settling time	15 ms
Latency average	100 ms

## Technical Specifications

### Integrated AC Adapter

<b>Weight</b>	0.66 lb/0.3 kg
<b>Power Supply (input)</b>	
Operating Voltage	90 to 260 VAC RMS
Operating Current	1.1 A RMS
Operating Frequency Range	47 to 63 Hz AC
Maximum Transient	4/50 KV

### Li-Ion Battery Pack

<b>Dimensions (HxWxD)</b>	0.82 x 3.2 x 5.8 in/2.08 x 8.13 x 14.73 cm
<b>Weight</b>	0.85 lb/0.39 kg
Energy	
Voltage	14.4 V
Amp-hour capacity	3.1 Ah
Watt-hour capacity	43Wh
<b>Temperature</b>	
Operating	50° to 104°F/10° to 40°C
Non-operating	-12° to 140°F/-25° to 60°C

### Convenience Base

<b>Dimensions (HxWxD)</b>	4.9 x 14.2 x 14.7 in/12.46 x 36.07 x 37.34 cm
<b>Weight</b>	4.25 lbs/1.93 kg
<b>Power Supply (input)</b>	
Operating Voltage	100 to 240 VAC
Operating Current	1.1 Amp Maximum
Rated Voltage	100 to 240 VAC
Rated Current	1 Amp Maximum
Line Frequency	47 to 63 Hz
<b>Temperature</b>	
Operating	50° to 95°F/10° to 35°C
Non-operating	-4° to 140°F/20° to 60°C
<b>Relative Humidity</b>	
Operating	10% to 90%
Non-operating	5% to 95%
<b>Altitude</b>	
Operating	10,000 ft/3,048 m
Non-operating	30,000 ft/9,144 m
<b>Shock</b>	
Operating	10 G, 11 ms, half-sine
Non-operating	140 G, 2 ms, half-sine
<b>Vibration</b>	
Operating	0.25 G, 5 to 500 Hz, 0.5 octave/min sweep rate
Non-operating	1 G, 5 to 500 Hz, 0.5 octave/min sweep rate
<b>Monitor Support</b>	Up to 85 lbs/38.56 kg

## Technical Specifications

### 24X Max<sup>2</sup> CD-ROM Drive

<b>Applicable Disc</b>	CD-DA, CD-ROM, CD-R, CD-ROM XA (except ADPCM), CD-I, Photo CD (Multi-session), Video CD, CD-Extra (CD+), CD-G, CD-RW
<b>Center Hole Diameter</b>	15 mm
<b>Disc Diameter</b>	12 cm, 8 cm
<b>Disc Thickness</b>	1.2 mm
<b>Track Pitch</b>	1.6 $\mu$ m
<b>Laser</b>	
Output power	0.24 $\pm$ 0.1 mW
Type	GaAlAs double hetero laser diode
Wave length	780 nm at Ph-4.3 mW
<b>Access Times (typical reads, including settling)</b>	150 ms
<b>Audio Output Level</b>	
Line-out	$\pm$ 0.27 Vrms
Headphone	None
<b>Cache Buffer</b>	128 KB
<b>Data Transfer Rate</b>	
Sustained	150 KB/s (sustained 1X)
Variable	1500 to 3600 KB/s (10X to 24X)
<b>Start-up Time</b>	< 8 sec
<b>Stop Time</b>	< 4 sec

<sup>1</sup> For Hard Drives, GB = Billion Bytes.

<sup>2</sup> Data transfer rates will vary from 150 KB/s to 3600 KB/s.

<sup>3</sup> Designed only to allow faster downloads from 56K V.90 compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem only supports Windows 9.x and Windows NT 4.0.

<sup>4</sup> Certain restrictions and exclusions apply. Service and Support programs vary by geographic region. Consult the Compaq Customer Support Center for details. In Canada consult the Product Information Center at 1-800-567-1616 for details.

<sup>5</sup> Pick-up and delivery service is available in 48 contiguous US States and Canada. Eligibility for priority pick-up (second business day return) is limited to certain geographic locations. Carry-in service available outside the US and Canada.

<sup>6</sup> IrDA 4 MB compliant. IR performance will vary depending on performance of IR peripherals and applications used.

<sup>7</sup> Full support in Windows 9.x.

<sup>8</sup> Actual results may vary individual usage. When tested in the standard configuration, using the Ziff-Davis BatteryMark Life test version 2.0, the battery life of the Amada 1750 will range over 2.5 hours. Standard configuration at time of announcement (1/25/99) 12.1" panel, 64-MB memory and no drives other than the hard drive active.

<sup>9</sup> AssetControl monitor. AssetControl features are accessible with Compaq desktops featuring Intelligent Manageability.

<sup>10</sup> May not be compatible with the ArmadaStation Monitor Support Stand, the Convenience Base I, or the Convenience Base II due to weight limitations.

<sup>11</sup> Armada 1500 compatible.

<sup>12</sup> Allows the Armada 1500 Convenience Base to support the Armada 1750.