

Notice

The company reserves the right to make any updates, revisions or changes to the information contained herein as and when deemed necessary. The company is under no obligation to notify any purchaser or end-user of such actions in advance or afterwards.

1999

Trademarks

IBM PC, OS/2, PS/2, EGA, and VGA are registered trademarks of International Business Machines Corporation.

Intel, Pentium are registered trademarks of Intel Corporation.

MS-DOS, Microsoft Windows, Windows NT and Microsoft Mouse are registered trademarks of Microsoft Corporation.

Sound Blaster Pro is a registered trademark of Creative Labs, Inc.

SystemSoft is a registered trademark of SystemSoft Corp.

Other brand and product names are registered trademarks of their respective companies.

Table of Contents

CHAPTER 1 GETTING STARTED.....	1-1
UNPACKING THE NOTEBOOK	1-2
FEATURES OF THE NOTEBOOK	1-3
Opening the LCD Cover.....	1-3
Power button.....	1-4
System Status LED Indicators	1-5
Top-Front View	1-6
LCD Panel	1-6
Stereo Speakers	1-7
Trackpad and Buttons.....	1-7
Microphone	1-7
Rear View	1-8
AC-in Socket	1-8
Dual USB Ports	1-8
RCA Jack.....	1-8
External Monitor (CRT) Port.....	1-9
Expansion Port	1-9
Parallel Port	1-9
Right-side View.....	1-10
Removable 3.5" Floppy Disk Drive	1-10
Infrared.....	1-11
Removable 5.25" CD-ROM Drive	1-11
Phone Jack (option).....	1-11
Speaker-out Jack.....	1-11
Line-in Jack.....	1-11
Microphone-in Jack	1-12
Right-side Stand	1-12
Left-side View	1-13
Left-side Stand.....	1-13
Ventilation	1-13
Removable 2.5" Hard Disk Drive Module	1-14
PC Card Sockets.....	1-14
Battery Pack	1-14
Bottom View	1-15
CD-ROM latch	1-15

Hard Disk Drive latch.....	1-15
CPU Cover	1-16
Battery Pack latch.....	1-16
Floppy Disk Drive latch	1-16
OPERATING ENVIRONMENT	1-17
POWERING THE SYSTEM.....	1-18
AC Power Adapter	1-18
Battery Pack	1-19
Removing.....	1-19
Inserting.....	1-19
Recharging by AC Power	1-20
Proper Handling of the Battery Pack	1-20

CHAPTER 2 OPERATION.....2-1

UPGRADING THE PROCESSOR.....	2-2
Replacing the Processor	2-3
Reinstalling the Processor	2-3
Reinstalling the Heat Sink.....	2-5
SETTING THE DIP SWITCH.....	2-6
Updating the Flash ROM BIOS	2-6
Accessing the 8-Pole DIP Switch (SW1)	2-6
EXPANDING MEMORY	2-7
Accessing the Memory Sockets.....	2-8
Installing the Memory Module.....	2-9
Removing the Memory Module	2-10
USING THE HARD DISK DRIVE	2-11
Removing the Hard Disk Drive Module.....	2-11
Replacing the Hard Disk Drive	2-12
Inserting the Hard Disk Drive Module	2-12
USING FLOPPY DISK DRIVE.....	2-13
Inserting/Removing the Diskettes	2-13
Replacing the Floppy Disk Drive.....	2-14
Write-Protecting Diskettes	2-15
<i>Do's and Don'ts</i>	2-15
USING THE CD-ROM.....	2-16
Removing the CD-ROM Module	2-17
Loading the Compact Discs	2-18
Handling of the Compact Discs.....	2-19

USING THE PC CARD SOCKETS	2-20
Inserting the PC Cards.....	2-20
Removing the PC Cards	2-21
USING THE HOT KEYS	2-22
USING THE NUMERIC KEYPAD.....	2-24
USING THE POWER MANAGEMENT.....	2-25
Advanced Power Management (APM 1.2).....	2-25
Hard Disk Standby	2-26
Global Standby.....	2-26
Suspend and Resume	2-26
Powered On Suspend (POS).....	2-27
Suspend To Disk (STD).....	2-28
ATTACHING THE PERIPHERAL DEVICES	2-29
Attaching a Phone Line (option)	2-29
Attaching a PS/2 Keyboard or Mouse	2-30
Attaching a Serial Mouse	2-31
Attaching a Parallel Printer	2-32
Attaching an External Monitor (CRT).....	2-33
Attaching a Proprietary Port Replicator	2-34
Attaching a Video Input Device	2-35
Attaching a TV Set.....	2-36
Attaching a USB-compatible Device	2-37
CHAPTER 3 BIOS UTILITIES	3-1
POWER ON SELF TEST (POST).....	3-2
POST Message: Normal Operation	3-2
POST Message: Error Detected.....	3-3
SYSTEM CONFIGURATION UTILITY.....	3-4
Information in the System Configuration Utility	3-4
Initiating the System Configuration Utility	3-5
Working with the Menu Bar (Main Menu).....	3-6
Working with the Pull-down Menu (Submenu).....	3-7
Features of the System Configuration Utility.....	3-8
Startup Menu	3-8
Memory Menu.....	3-10
Disks Menu	3-11
Components Menu.....	3-12
Power Menu	3-15

Exit Menu.....	3-18
CHAPTER 4 TROUBLESHOOTING	4-1
BATTERY	4-2
POWER	4-3
HARD DISK DRIVE	4-5
FLOPPY DISK DRIVE.....	4-5
HARDWARE INSTALLATION.....	4-6
LCD PANEL.....	4-6
MEMORY MODULE	4-7
PC CARD.....	4-8
BOOT PASSWORD	4-9
AUDIO	4-9
CD	4-10
PRINTER	4-11
ATI DVD PLAY (OPTIONAL)	4-12
CHAPTER 5 INSTALLING DRIVERS.....	5-1
PREPARATION	5-2
INSTALLING WINDOWS 95 (FOR REFERENCE)	5-2
INSTALLING WINDOWS 98 (FOR REFERENCE).....	5-4
INSTALLING DRIVERS IN WINDOWS 95.....	5-5
Step 1: Run USB supplement path update file	5-5
Step 2: Installing TXPATCH Driver.....	5-5
Step 3: Installing VGA Driver	5-5
Step 5: Installing PCMCIA driver	5-6
Step 6: Installing Video-in Driver	5-7
Step 7: Installing ATI DVD Play Driver (Option).....	5-8
Step 8: Using Infrared Wireless Communication	5-8
INSTALLING DRIVERS IN WINDOWS NT 4.0.....	5-9
Step 1: Installing VGA Driver	5-9
Step 2: Installing Audio Driver.....	5-10
INSTALLING DRIVERS IN WINDOWS 98.....	5-11
Step 1: Installing VGA Driver	5-11
Step 2: Installing Audio Driver.....	5-11
Step 3: Installing PCMCIA Driver	5-12
Step 4: Installing Video-in Driver	5-12
Step 5: Installing ATI DVD Play Driver (Option).....	5-13


APPENDIX A: SPECIFICATIONS..... I
APPENDIX B: I/O PORT PIN ASSIGNMENTS..... V

Safety Notice


The computer is a delicate device that requires careful handling. Negligence or mistaken use may cause serious damage. Before you learn to operate or use this computer, you need to understand the instruction regarding safety handling.

The following mentions the incorrect handling that is seriously inhibited. To keep the computer from being damaged, please keep these precautions in your mind.


Do not turn off the power in operation.

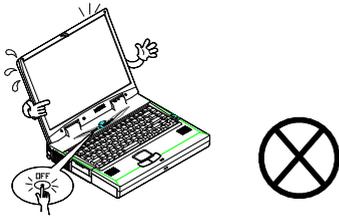


Do not place the computer on unstable surface.

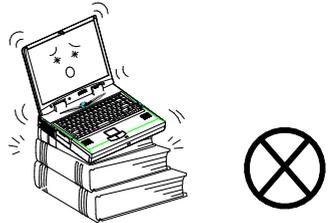

Do not turn off the peripheral device when the light is on.

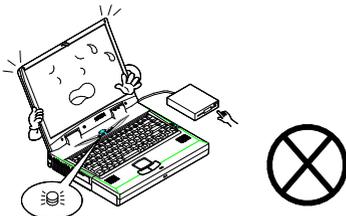


Do not touch the poisonous liquid when the LCD is broken.

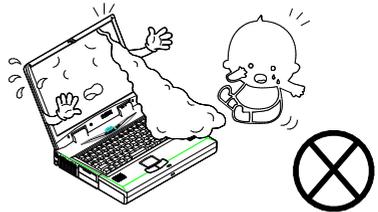

Do not disassemble the computer yourself.




Do not place anything heavy on the computer.

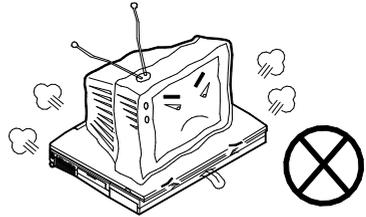


Do not touch power cord by wet hand.




Do not use broken power cord.

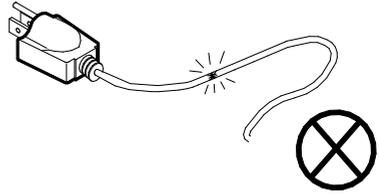

Keep the computer away from any metal appliance.

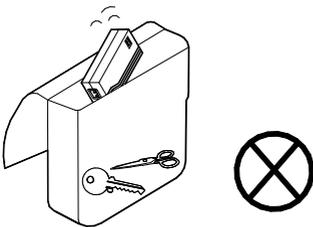


Do not throw the computer or accessories into fire.

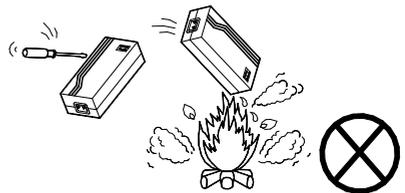


The following mentions the actions that are important for your computer. To keep your computer in the most excellent condition, please follow the instruction as much as possible.


If there is unusual odor, heat or smoke, unplug the power cord immediately.

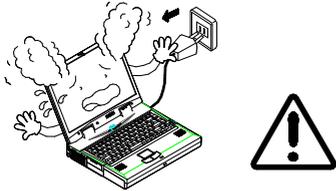


Unplug the power cord in attaching peripheral device.

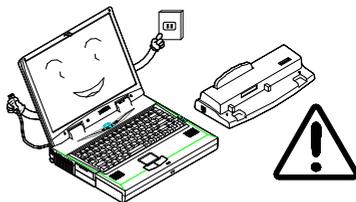


Follow the use instruction in taking airplane.

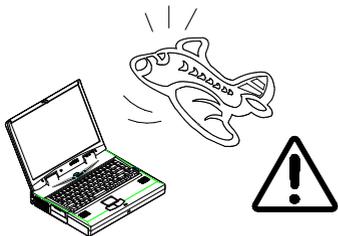


Use the same brand of peripheral device.

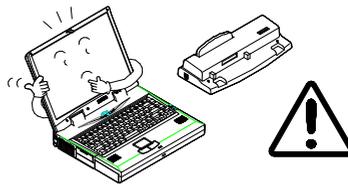

Maintain your computer regularly.

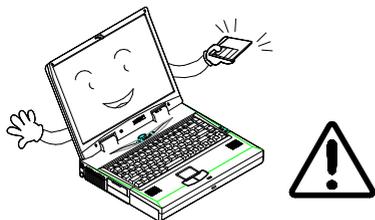

Do not place heavy thing on the power cord.

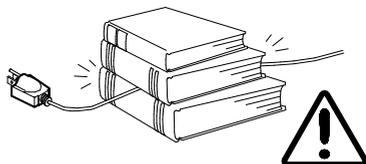


Affix tap to the contact plate while putting the battery into keeping box.




Take a rest after a long time of work.



The data is easy to lose in low power status.

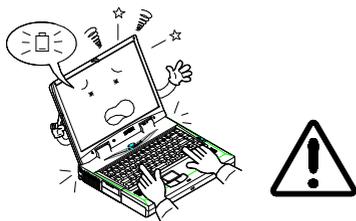

Please keep the computer away from humid environment.

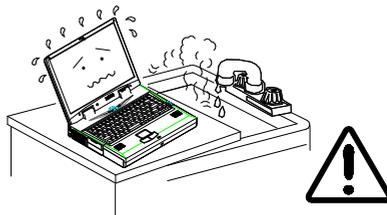

Conventions

This manual uses the following conventions to describe, identify, and highlight terms and operating procedures.

Text Conventions

Text in boldface contains messages that are important for safe operation. Please read.

Characters in boldface represent specific items or keys, e.g. **CardBus**, **Fn** key.

File names are presented in bold capitals, e.g. **A:\>0VMAKFIL —Pn**.

Abbreviations

For the purpose of clarity, abbreviations are enclosed in parentheses following their definition; for example, Enhanced Parallel Port (EPP) mode.

Icons

Icons identify ports and jacks of the notebook computer. The system status indicators are also identified with their relative icons.

Keys

Keys appear in boldface. A plus sign (+) between two keys indicates that they should be pressed simultaneously.

Messages

Note: A note is an advice that helps you make best use of your notebook computer. Please read.

Ergonomics

Developing good work habits are important if you need to work in front of the computer for long periods of time. Improper work habits can result in discomfort or serious injury from repetitive strain to your hands, wrists or other joints. The following are some tips to reduce the strain:

- Adjust the chair and desk to make your elbow height near the height of keyboard. Keep your forearms, wrists, and hands in a relaxed position.
- Your knees should be slightly higher than your hips. Place your feet flat on the floor or on a footrest if necessary.
- Use a chair with a back and adjust it to support your lower back comfortably.
- Sit straight so that your knees, hips and elbows form approximately 90° angles when you are working.



Lighting

Proper lighting and comfortable display viewing angle can reduce the eye strain and muscle fatigue in your neck and shoulders.

- Position the display to avoid glare or reflections from overhead lighting or outside light sources.
- Keep the display screen clean and set the brightness and contrast to levels that allow you to see the screen clearly.
- Position the display directly in front of you at a comfortable viewing distance.
- Adjust the display viewing angle to find the best position.

In addition, continuous concentration on computing work can result in discomfort and injury. Remember to:

- Alter your posture frequently.
- Stretch and exercise your body several times a day.
- Take periodic breaks when you work at the computer for long periods of time. Frequent and short breaks are of greater benefit than fewer and longer breaks.

Chapter 1 Getting Started

This chapter provides you with the introduction to the Notebook Computer. It will familiarize you to the computer's features, components, operating environment and the power sources.



Unpacking the Notebook



Features of the Notebook



Operating environment



Powering the system

Unpacking the Notebook

Carefully unpack the Notebook Computer and the included accessories (Figure 1-1). If there is any discrepancy or problem, contact your dealer immediately. Be sure to save the packing materials in the event that the notebook needs to be shipped in the future. The shipping carton should contain the following items:

- μ Notebook computer
- μ CD for Drivers
- μ PS/2 Transfer Cable
- μ Carrying Bag
- μ User's Manual
- μ Battery Pack
- μ Utilities Diskette
- μ Power Cord
- μ Power Adapter

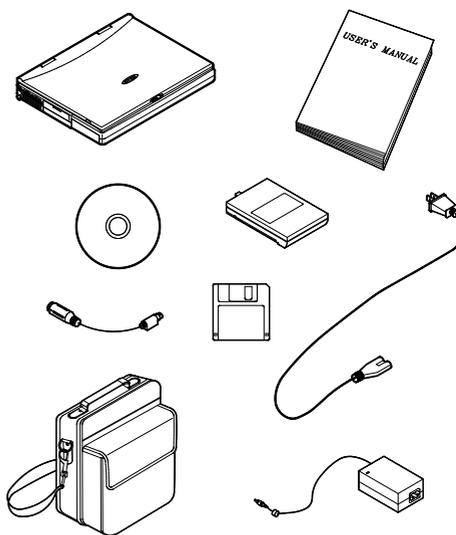


Figure 1-1

Features of the Notebook

Opening the LCD Cover

1. Push the latch towards the right to open the top cover. (Figure 1-2)
2. Lift the top cover to reveal the LCD (Liquid Crystal Display) panel and the keyboard.
3. Adjust the LCD panel to a comfortable viewing angle.
4. Press the power button to turn the system on or off (Figure 1-4).

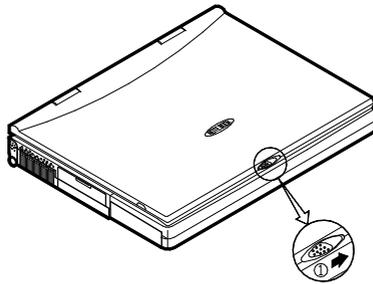


Figure 1-2

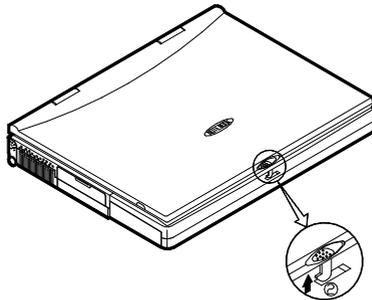


Figure 1-3

System Status Indicators

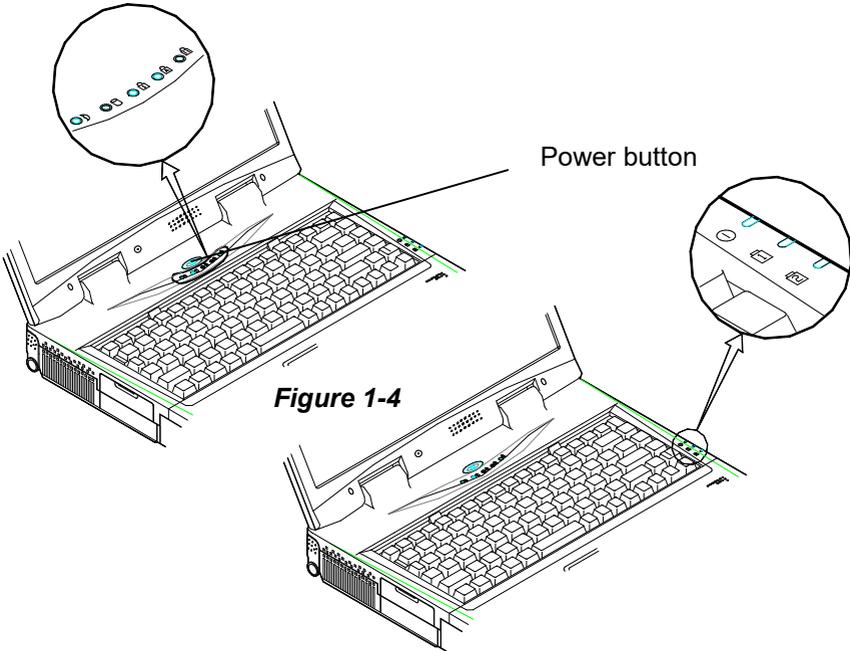


Figure 1-4

Figure 1-5

Power button

Use this button to turn the system on or off (Figure 1-4). After proper configuration under SCU (System Configuration Utilities), this button can be used as suspend/resume hot button (refer to Chapter 3: BIOS Utilities, Power Menu for more information).

Note: After turning off the system, wait for a few seconds to power it on again.

System Status LED Indicators

The LED indicators show the system's operation status (see Figure 1-4 & 1-5).

Icon	Color	Description
	Green	Battery power is used with the system turning on.
	Red	AC power is used with the system turning on.
	Blinking Red	Battery power is critically low.
	Green	1 st Battery is fully charged.
	Red	1 st Battery is being charged.
	Green	2 nd Battery is fully charged.
	Red	2 nd Battery is being charged.
	Green	The embedded numeric keypad feature is activated
	Green	The Caps Lock feature is activated.
	Green	The Scroll Lock feature is activated.
	Green	The system has entered the configured suspend mode.
	Green	The hard disk is being accessed.

⊂ **Stereo Speakers**

Two built-in speakers provide clear stereo sound.

⊆ **Trackpad and Buttons**

The pointing device features a sensitive glide pad for precise movements. It is compatible with the IBM PS/2 mouse. The buttons of the trackpad function as those of a standard mouse.

∈ **Microphone**

This is the built-in microphone for recording sound into your applications.

€ External Monitor (CRT) Port

The External Monitor uses a 15-pin connector for connecting an external CRT monitor. Simultaneous display in LCD screen and external CRT monitor is available.

€ Expansion Port

The Expansion port uses a 176-pin Docking connector for connecting a Port Replicator.

∠ Parallel Port

The Parallel Port uses a 25-pin female connector for connecting a parallel printer or other parallel devices. This parallel port supports EPP (Enhanced Parallel Port) V1.7/V1.9 and ECP (Extended Capabilities Port) modes.

∇ Serial Port ¹

The RS-232C serial port uses a 9-pin male connector for connecting an external serial mouse, serial printer or fax/modem.

® PS/2 Type Ports

The PS/2 Type Port uses 6-pin connector for connecting an external PS/2 type mouse or keyboard.

Right-side View

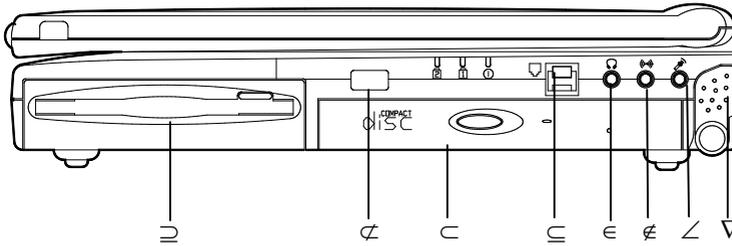


Figure 1-8

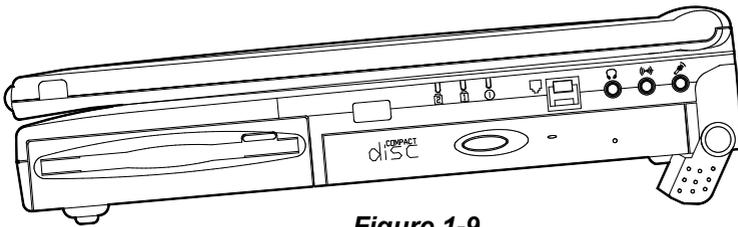


Figure 1-9

☐ Removable 3.5" Floppy Disk Drive

The Notebook comes standard with a removable 3.5" 1.44MB floppy drive installed in a bay. The floppy disk drive module can be replaced with optional drive units, such as a 12.7mm high 2.5" hard disk drive, a 12.7mm high LS-120 120MB floppy drive or a secondary battery pack. (Please refer to Chapter 2: Operation for more information on using floppy disk drive.)

♀ Infrared

The notebook is equipped with an infrared feature that allows the communication with an infrared-compatible device. The Infrared port supports IrDA (HPSIR) 1.1 mode, Amplitude Shifted Keyed IR (ASKIR) mode, and Fast IR (FIR) mode.

⊂ Removable 5.25" CD-ROM Drive

The notebook comes standard with a 24-speed 5.25" CD-ROM drive. The removable CD-ROM drive module can be replaced with the optional drive units, such as a 12.7mm high DVD-ROM drive, or a third Hard Disk drive. (Please refer to the Chapter 2: Operation for more information on using the CD-ROM.)

⊆ Phone Jack (option)

The phone jack is used to support the built-in modem. You can attach a phone line to the jack and insert a modem card (optional) into the modem socket on the mainboard.

∈ Speaker-out Jack

Headphone or speakers can be attached to the system through this jack.

€ Line-in Jack

External audio source can be fed into the Notebook through this jack.

∠ **Microphone-in Jack**

Connect an external microphone to the system.

▽ **Right-side Stand**

Move this stand (together with the left one) to adjust the typing angle. If a high speed CPU is installed on the system, erecting the stands on both sides will be necessary for heat dissipation during operation. (Figure 1-9)

Left-side View

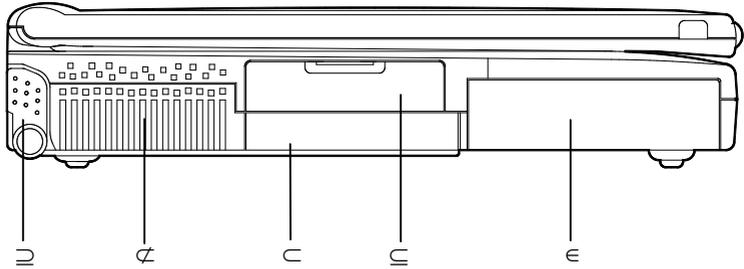


Figure 1-10

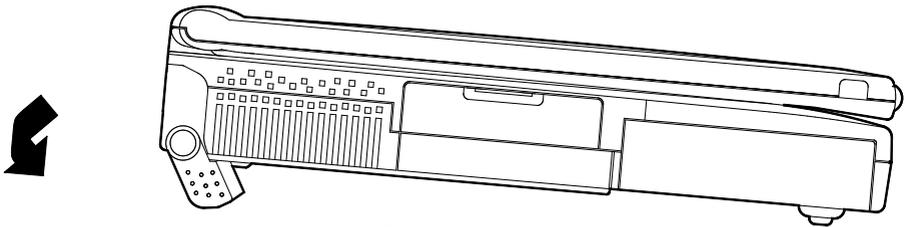


Figure 1-11

☐ Left-side Stand

Move this stand (together with the right one) to adjust the typing angle. If a high speed CPU is installed on the system, erecting the stands on both sides will be necessary for heat dissipation during operation (Figure 1-11).

☒ Ventilation

The Notebook provides ventilation to dissipate the system's operating heat. Do not block or obstruct it during operation.

⊆ **Removable 2.5” Hard Disk Drive Module**

The notebook comes standard with a removable 2.5-inch IDE Hard Disk Drive with a height of 12.7mm installed in a bay. (Please refer to Chapter 2: Operation for more information on using Hard Disk Drive.)

⊆ **PC Card Sockets**

The notebook provides two Type II or one Type III PC card socket. Both sockets will expand the system capabilities when a PC card is inserted. (Please refer to Chapter 2: Operation for more information on Using PC Card socket.)

∈ **Battery Pack**

The notebook comes with a rechargeable battery pack that lets you operate the computer without an external power source.

Bottom View

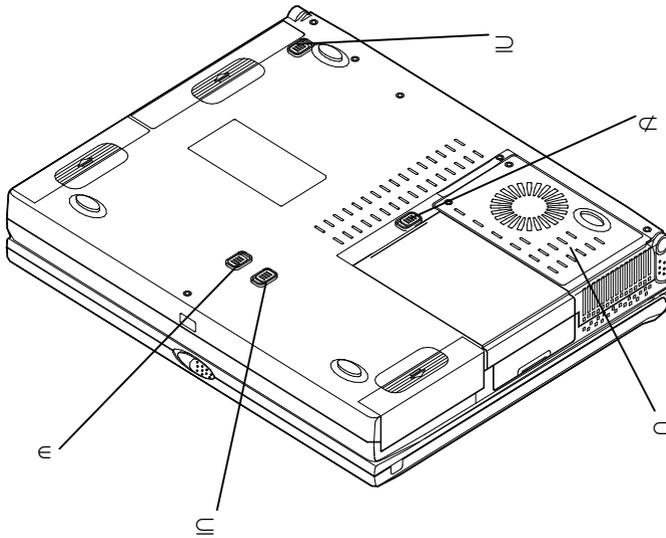


Figure 1-12

≡ CD-ROM latch

Push this latch to release the CD-ROM module from its bay. (Please refer to Chapter 2: Operation for more information on inserting or removing the CD-ROM.)

∩ Hard Disk Drive latch

Push this latch to release the Hard Disk Drive module from its bay. (Please refer to Chapter 2: Operation for more information on Inserting or removing the Hard Disk Drive.)

⊂ **CPU Cover**

Detaching the screws to remove the cover. The CPU is under the heat sink and the cover. You may upgrade the CPU for higher performance.

⊆ **Battery Pack latch**

Push this latch to release the Battery Pack from its bay. (Please refer to Chapter 1: Getting Started for more information on Inserting or removing the Battery Pack.)

€ **Floppy Disk Drive latch**

Push this latch to release the Floppy Disk Drive module from its bay. (Please refer to the Chapter 2: Operation for more information on inserting or removing the Floppy Disk Drive.)

Operating Environment

Proper care and operation of your notebook computer will prolong the use period. Make sure the computer is not:

- μ Exposed to excessively heat or direct sunlight.
- μ Subjected to shock or vibration.
- μ Exposed to strong magnetic fields.
- μ Left in a place where foreign matter or moisture may enter the system.

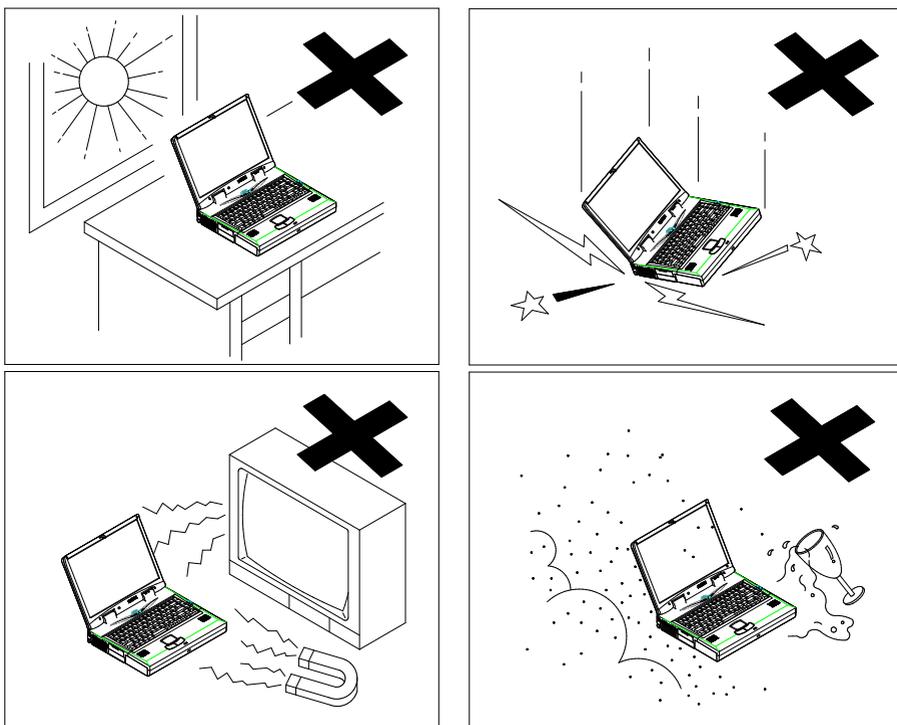


Figure 1-13

Powering the System

You can use the AC power adapter or battery pack to power the computer system.

AC Power Adapter

Use only the power adapter that comes with your Notebook Computer. Using the incorrect power adapter will cause damage to the Notebook and its components.

1. Plug the power adapter to the AC-in socket on the rear panel of the Notebook.
2. Connect the power cord to the power adapter.
3. Plug the AC power cord into a properly grounded outlet.
4. Refer to Chapter 1, System Status Indication for more information on system power status.

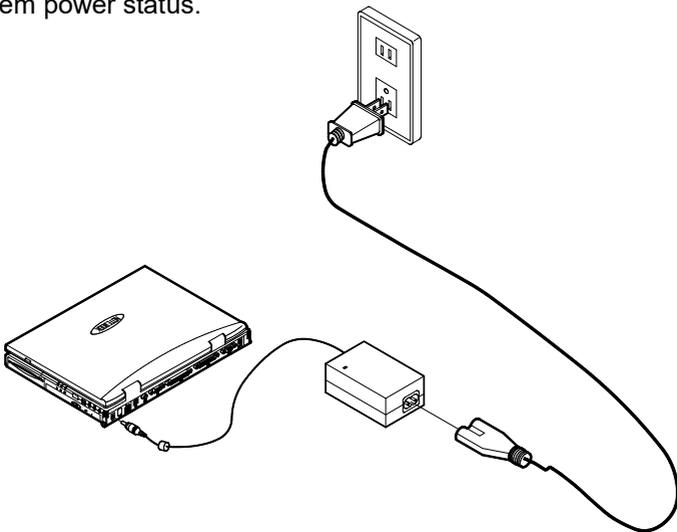


Figure 1-14

Battery Pack

Power for continuous portable operation of the Notebook is provided by a battery pack. When the battery pack is fully charged, you can operate the computer for approximately two hours. However, the actual operating time will be determined by the application used and the configuration set.

Removing

1. Turn the Notebook over.
2. Locate the Battery Pack latch. (Figure 1-15)
3. Push the latch in the direction as indicated and draw the battery pack out the bay.

Inserting

1. Turn the Notebook over.
2. Insert the battery pack into the bay.
3. Make sure the battery slides into the bay properly and mates with its connector firmly.

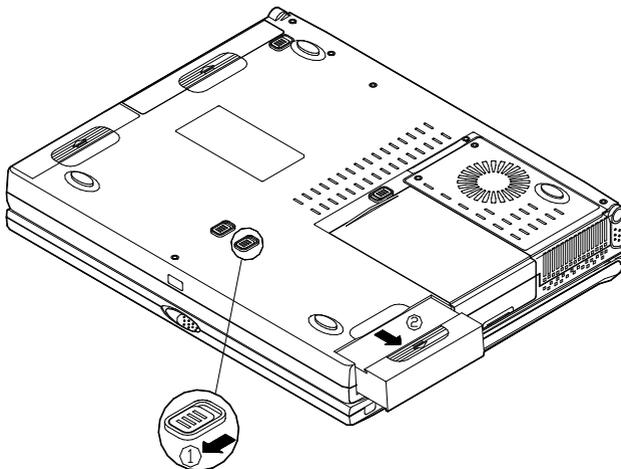


Figure 1-15

Recharging by AC Power

The system's battery pack will recharge whenever the system is plugged into the AC power supply, regardless of whether the system is being operated or not.

1. You may connect the AC power adapter to the Notebook Computer at any time to begin recharging the system's battery pack. You do not need to turn off the system's power.
2. It will take several hours to recharge the battery to its full charge status.
3. Please refer to Chapter 1, System Status Indicators for more information on battery charge status.

Proper Handling of the Battery Pack

- μ Do not attempt to disassemble the battery pack under any circumstances.
- μ The battery may explode if exposed to fire or high temperatures.
- μ Avoid short circuiting the battery by preventing contact between the metal terminals (+, -)

Chapter 2 Operation

The Notebook has many advanced features to help you with your computing work. This chapter describes each of the Notebook's hardware features and shows you how to use them.

Before you begin working with any internal components of the Notebook, remove the battery and disconnect the AC power adapter.

Make sure that you wear an anti-static wrist strap to ground yourself before working with any internal components of the Notebook. Static electricity may damage the components.



Upgrading Processor



Setting DIP Switch



Using Hard Disk Drive



Using Floppy Disk Drive



Using CD-ROM



Using PC Card Sockets



Using Hot Keys



Using Numeric Keypad



Using Power Management



Attaching Peripheral Devices

Upgrading the Processor

The notebook supports Intel Celeron processor at 300MHz, 333MHz, 366MHz, 400MHz and 433MHz Core frequencies. The Intel Celeron processor provides good performance for applications running on advanced operating systems such as Window 95/98, Window NT, and UNIX. In addition, It features a Dynamic Execution microarchitecture and also executes **MMX** technology instructions for enhanced media and communication.

Because of using the cost-effective packaging technology, user can easily install the processor by plugging the PPGA package into the 370-pin socket (PGA 370). However, it is recommended to upgrade the system by the certified technicians.

Replacing the Processor

1. Remove all the power sources (AC power and battery).
2. Turn the Notebook over.
3. Remove the CPU cover.
4. Remove the screws that fasten the heat sink mounted on the Processor.
5. Carefully detach the Processor from the mainboard.

Note:

Wait for the CPU to cool down before replace it.

Contact your dealer for the proprietary tool to replace the CPU.

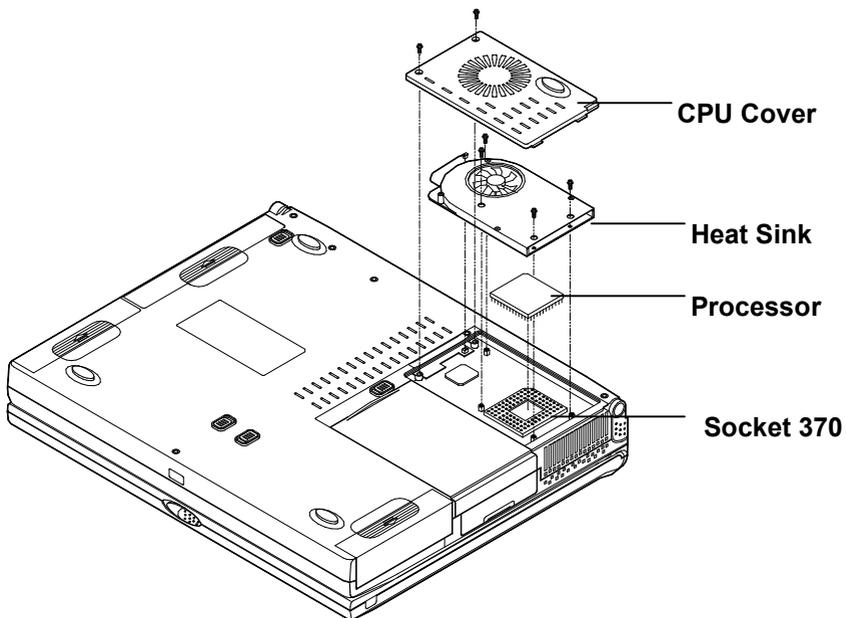


Figure 2-1

Reinstalling the Processor

To insert or extract your processor, please contact your service dealer for

correct operation.

Reinstalling the Heat Sink

Make sure that the heat sink cable is properly placed (Figure 2-3).

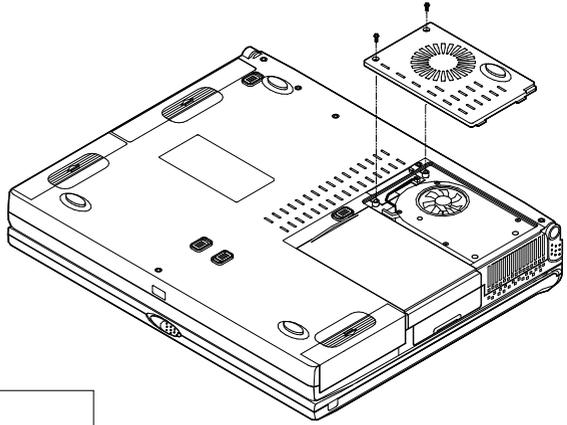


Figure 2-2

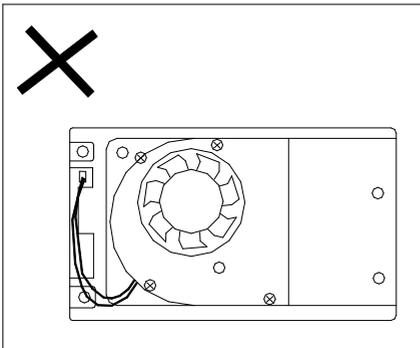
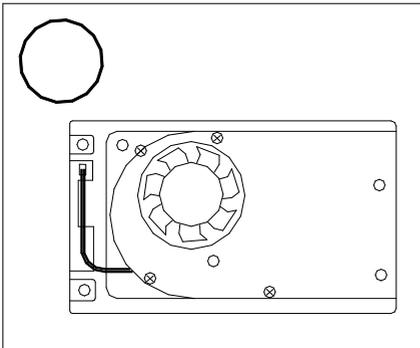


Figure 2-3

Setting the DIP Switch

Updating the Flash ROM BIOS

In order to keep up with the latest system BIOS, your notebook may be upgraded. Consult your dealer for further information. The DIP Switch needs to be set in the **On** position when updating the existing system BIOS. The DIP Switch should be reset to the **Off** position after BIOS updating is complete.

DIP Switch (SW1)								Purpose
S1-1	S1-2	S1-3	S1-4	S1-5	S1-6	S1-7	S1-8	Flash ROM BIOS
OFF	OFF	X	X	X	X	X	X	Existing BIOS
ON	ON	X	X	X	X	X	X	Update BIOS

Accessing the 8-Pole DIP Switch (SW1)

Access the 8-Pole DIP Switch to set the BIOS.

1. Turn the system power off.
2. Press the two keyboard latches and Carefully lift the keyboard assembly out to expose the mainboard. Adjust the DIP Switch SW1 to set the configuration.

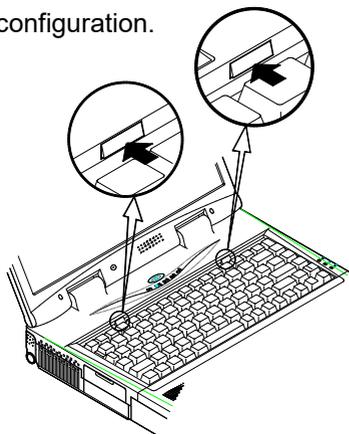


Figure 2-4

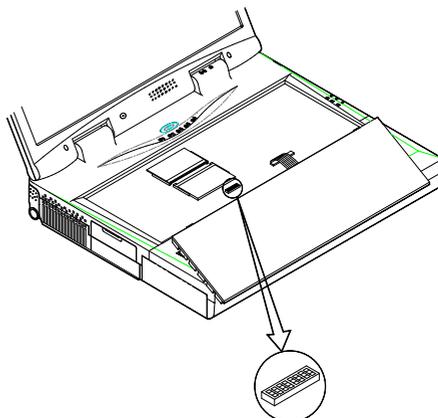


Figure 2-5

Expanding Memory

The system has two memory sockets for different RAM modules to expand the memory up to 256MB. These RAM modules are of a 144-pin SODIMM (Small Outline Dual In-line Memory Module) type. The Notebook supports EDO, and SDRAM operation. The total memory size is automatically detected by the POST routines. With the following different RAM combinations (for reference), the total memory size can be:

Bank 0 (64-bit)	Bank 1 (64-bit)	Power	Minimum Speed	Total Size
16MB	0MB	3.3V	EDO: 60ns SDRAM:75 MHz	16MB
0MB	16MB			16MB
16MB	8MB			24MB
8MB	16MB			24MB
16MB	16MB			32MB
32MB	0MB			32MB
0MB	32MB			32MB
32MB	8MB			40MB
8MB	32MB			40MB
32MB	16MB			48MB
16MB	32MB			48MB
64MB	0MB			64MB
0MB	64MB			64MB
64MB	8MB			72MB
8MB	64MB			72MB
64MB	32MB			96MB
32MB	64MB			96MB
64MB	64MB			128MB
0MB	128MB			128MB
128MB	32MB			160MB
32MB	128MB			160MB
128MB	64MB			192MB
64MB	128MB			192MB
128MB	128MB			256MB


Note: You can not use the EDO RAM and SDRAM together.

Accessing the Memory Sockets

1. Turn the system power off.
2. Press the two keyboard latches to elevate the keyboard from its normal position.
3. Carefully lift the keyboard assembly out to expose the mainboard. Locate the memory sockets (Figure 2-7).

Note:

- *The memory socket Bank 1 is a reverse type, make sure you install the memory module with the reverse side to fit its connector.*
- *Please ensure that each edge of the memory module (SDRAM) has no component mounted on (see Figure 2-6). It is recommended to use the RAM module that complies with Intel unbuffered SO-DIMM (67.6mmX31.75mm). Please consult your dealer for detailed information.*

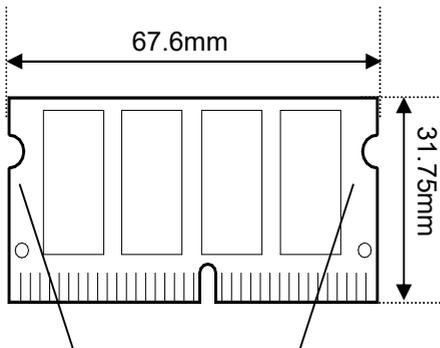

Non-component area

(The edges of the memory module are the non-component areas.)

Figure 2-6

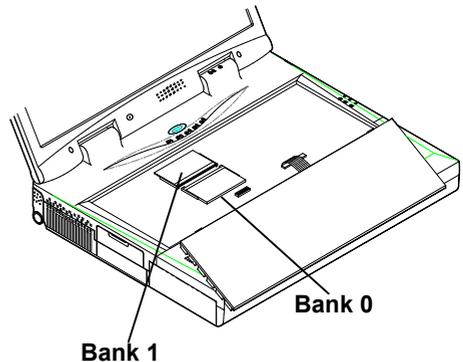


Figure 2-7

Installing the Memory Module

Follow the steps below to install the memory module:

1. Turn the system power off.
2. Press the two keyboard latches to elevate the keyboard from its normal position.
3. Carefully lift the keyboard assembly out to expose the mainboard. Locate the memory sockets (Figure 2-7).
4. **Position the memory module at a slight angle (45°)** and fit its connectors into the socket firmly (Step 1 of Figure 2-8).
5. **Press two edges of the memory module (Step 2 of Figure 2-8) to make it locked into place.**
6. Reinstall the keyboard assembly.

Note:

It is recommended to install the memory module in the order of Bank 0, Bank 1 (see Figure 2-9). Please refer to the table of DRAM combinations or consult your dealer for a proper installation.

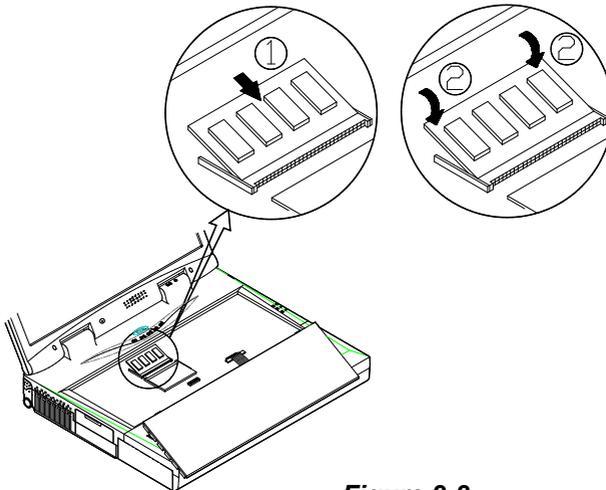


Figure 2-8

Removing the Memory Module

1. Turn the system power off.
2. Press the two keyboard latches to elevate the keyboard from its normal position.
3. Carefully lift the keyboard assembly out to expose the mainboard. Locate the memory sockets (Figure 2-7).
4. Gently pull the two latches on both ends of the module outward (Step 1 of Figure 2-9). The module will pop up (Step 2 & 3 of Figure 2-9).
5. Remove the memory module.
6. Reinstall the keyboard assembly.

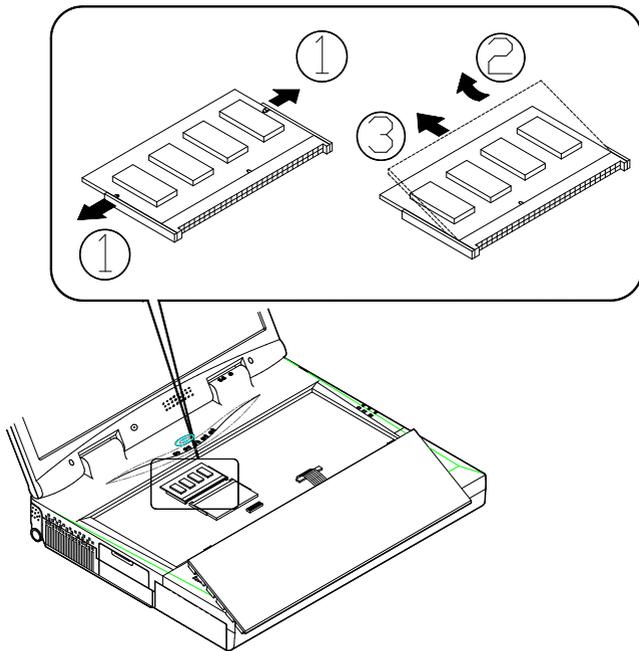


Figure 2-9

Using the Hard Disk Drive

The notebook is equipped with a 2.5" IDE hard disk drive mounted in a removable case. Therefore, the hard disk drive can also be easily removed and replaced with another hard disk drive with a height of 17mm. The hard disk drive supports Programmed I/O (PIO) mode 4, Master mode and Ultra ATA (Ultra DMA-33) mode which can provide a high performance data transfer rate at speeds up to 33 MB/second.

Removing the Hard Disk Drive Module

1. Turn off the power.
2. Turn the Notebook over.
3. Locate the Hard Disk drive latch (Figure 2-10).
4. Push the latch in the direction as indicated and pull the hard disk drive module out of the bay.

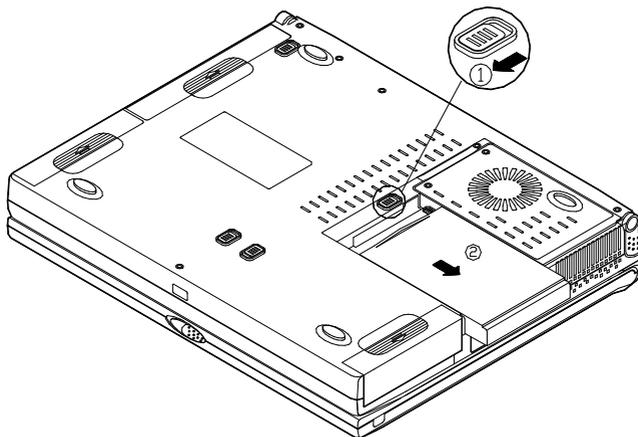


Figure 2-10

Replacing the Hard Disk Drive

1. Remove the two screws on each side of the case. (Figure 2-11)
2. Gently disconnect the cable from the hard disk drive.
3. Connect the replacement hard disk drive with the cable.
4. Insert the replacement hard disk drive into the case.
5. Fasten the screws of each side.

Note: *The hard disk drive with different height must use the different case to house itself. Contact your dealer for details about these replacements.*

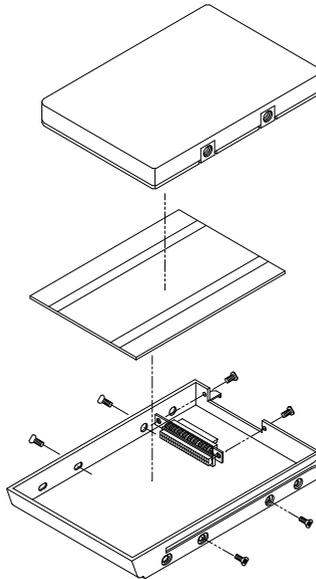


Figure 2-11

Inserting the Hard Disk Drive Module

1. Insert the hard disk drive module into the bay
2. Make sure it slides into the bay properly and mates with the connector firmly.

Using Floppy Disk Drive

The Notebook is equipped with a removable 1.44MB, 3.5" floppy disk drive module. It is usually designated as drive A by default and may be used as a boot device if properly set in SCU (please refer to Chapter 3, BIOS Utilities). You may replace the floppy disk drive module with the following options: a 2.5" secondary IDE hard disk drive (of 12.7mm high), a 120MB LS-120 floppy disk drive (of 12.7mm high), or a secondary battery pack. Contact your dealer for detailed information about these options.

Inserting/Removing the Diskette

Always insert your floppy diskette with label-side up when using the floppy drive. Press the eject button on the top-right corner of the floppy drive to remove your diskette.

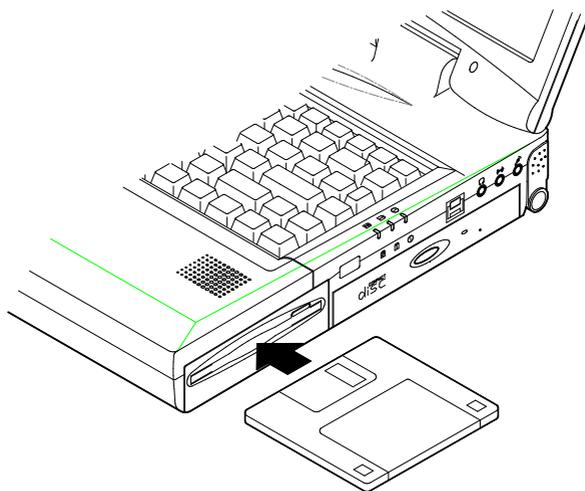


Figure 2-12

Replacing the Floppy Disk Drive

1. Turn off the power.
2. Turn the Notebook over.
3. Locate the Floppy Disk Drive latch (Figure 2-13).
4. Push the latch in the direction as indicated and pull the floppy disk drive module out of its bay.
5. Insert the replacement module into the bay.
6. Make sure it slides into the bay properly and mates firmly with the connector.

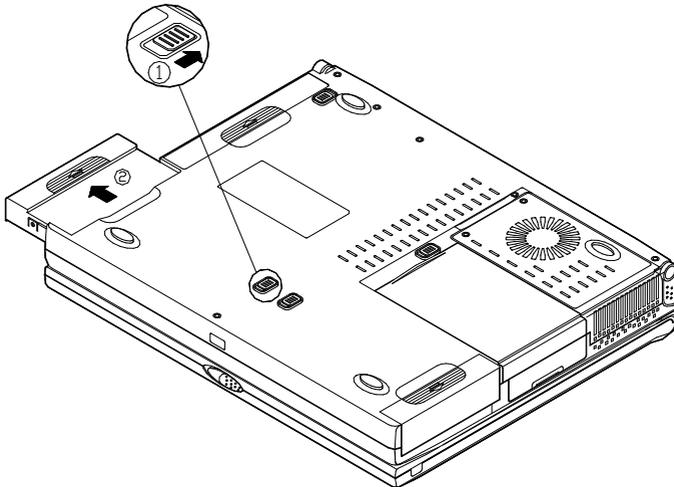


Figure 2-13

Write-Protecting Diskettes

Diskettes can be write-protected to prevent files from being accidentally erased or destroyed by system. To write-protect a 3.5" floppy diskette, move the built-in write-protect tab to the write-protect position, ("up" so that you can see through the "hole" in the upper, right-hand corner of the diskette). Putting the write protect tab back "down" will enable you to write data on the disk again.

Do's and Don'ts

- μ Always make backup copies of your software and data diskettes.
- μ Keep the diskettes away from the magnetic fields.
- μ Do not remove the diskettes from the drive while the diskette "in-use" light is on.
- μ Do not open or remove the protective shutter that covers the diskette's media.
- μ Do not allow dust or moisture on the diskettes.
- μ Do not bend or throw the diskettes.
- μ Do not clean the diskettes with liquids or solvents.

Using the CD-ROM

The Notebook is equipped with a removable CD-ROM drive module. It is usually designated as drive D by default and may be used as a boot device if properly set in SCU (please refer to Chapter 3, BIOS Utilities). You may replace the CD-ROM drive module with the following options, DVD-ROM drive (of 12.7mm), or the third battery pack.

To insert a CD, press the **Eject Button** and place the CD on the **Disc Tray** with label-side up. The **Busy Indicator** will light up while the data is being accessed or while playing an audio CD. When the power of the system is unexpectedly interrupted, insert an instrument such as a straightened paper clip into the **Emergency Eject Hole** to manually eject the tray.

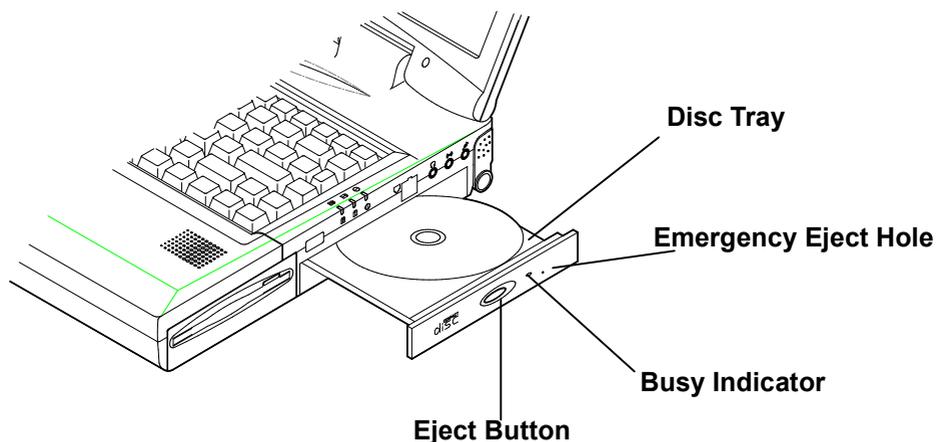


Figure 2-14

Removing the CD-ROM Module

1. Turn off the power.
2. Turn the Notebook over.
3. Locate the CD-ROM latch (Figure 2-15).
4. Push the latch in the direction as indicated and pull the CD-ROM module out of the bay.

Note: Do not disassemble the CD-ROM module by yourself. Only certified technicians should perform repairs to the CD-ROM module.

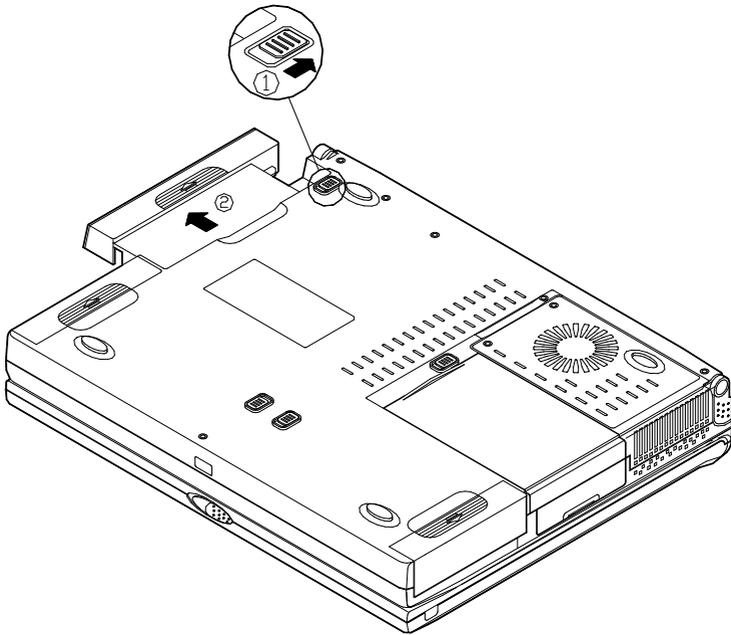


Figure 2-15

Loading the Compact Discs

1. Turn on the power.
2. Press the CD-ROM eject button; the disc tray will pop out partially.
3. Gently pull the disc tray out.
4. Carefully load the CD on the disc tray with label-side up. Make sure the CD is seated properly.
5. Push the tray into the computer to close it.

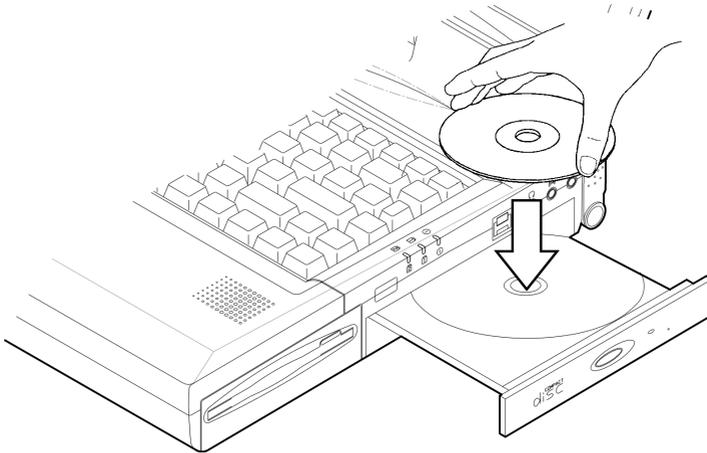


Figure 2-16

Handling of the Compact Discs

Proper handling of your CDs will prevent them from being damaged and ensure the accessibility of the data stored on them.

- μ Hold the CD by the edges; avoid touching the surface of the disc.
- μ Use the clean, soft, dry cloth to remove the dust or fingerprints.
- μ Do not use a pen to write on the surface.
- μ Do not attach any paper or other materials to the surface of the disk.
- μ Do not store or place the CD in the areas where it will be exposed to high temperatures.
- μ Do not use the benzene, thinners, or other cleaners to clean the CD.
- μ Do not bend the Compact Disc.
- μ Do not drop or subject the CDs to shock.

Using the PC Card Sockets

The PC cards can expand the capabilities of the notebook computer. Your Notebook is equipped with two PC card sockets that accommodate one Type III card or two Type II cards. These sockets support both PCMCIA standard release 2.0 cards and 32-bits Cardbus (PC card 95) cards, and so on. PC cards can be LAN, fax/modem, communication devices, or expanded memory ones. These PC card sockets can accept either 3.3V or 5V PC cards.

The lower socket named socket A is capable of ZV (Zoomed Video), which allows a direct connection between a PC card and video devices that enables high quality video playback (Figure 2-19).

Inserting the PC Cards

1. Open the access door of the PC card sockets (Figure 2-17).
2. Align the PC card with the appropriate socket and push it in firmly until it locks into place.

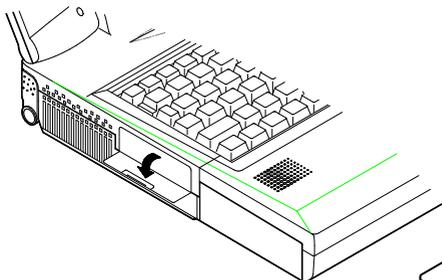


Figure 2-17

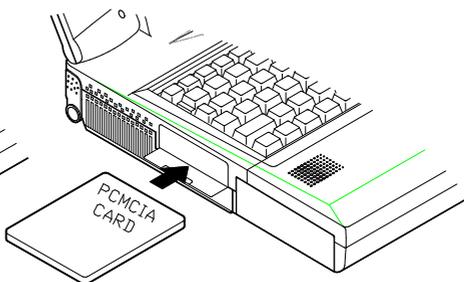


Figure 2-28

Removing the PC Cards

Two eject buttons are located next to each socket. Press the appropriate eject button to remove the PC card from its socket. (Please refer to Figure 2-19)

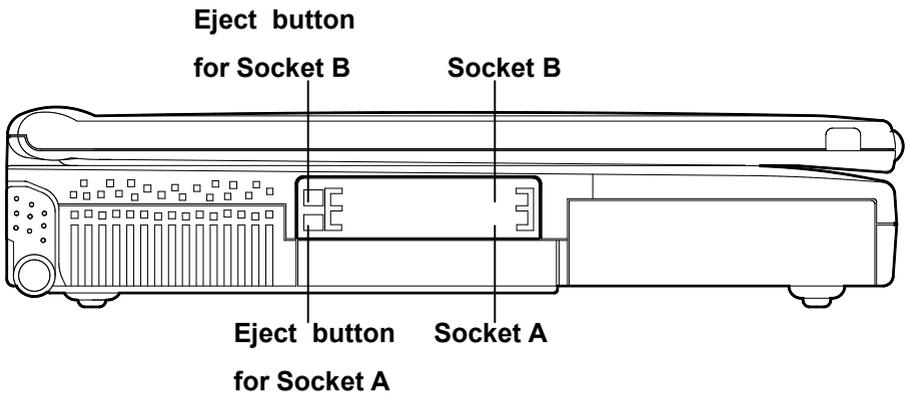


Figure 2-19

Using the Hot Keys

Located on the bottom-left corner of the keyboard layout is a colored **Fn** key (Figure 2-20). It is a special feature designed only on the Notebook for an easy access to system features. Simultaneously press **Fn** key and one of the following keys to execute the specific functions:

<i>Hot Key</i>	<i>System Features</i>
Fn+F3	Expand the display of LCD
Fn+F6	Toggle CRT/LCD/LCD+CRT/TV/CRT+TV
Fn+F9	Decrease the brightness of LCD
Fn+F10	Increase the brightness of LCD
Fn+F11	Decrease the audio volume
Fn+F12	Increase the audio volume
Fn+Z	Toggle audio mute on/off
Fn+Esc	Suspend/resume

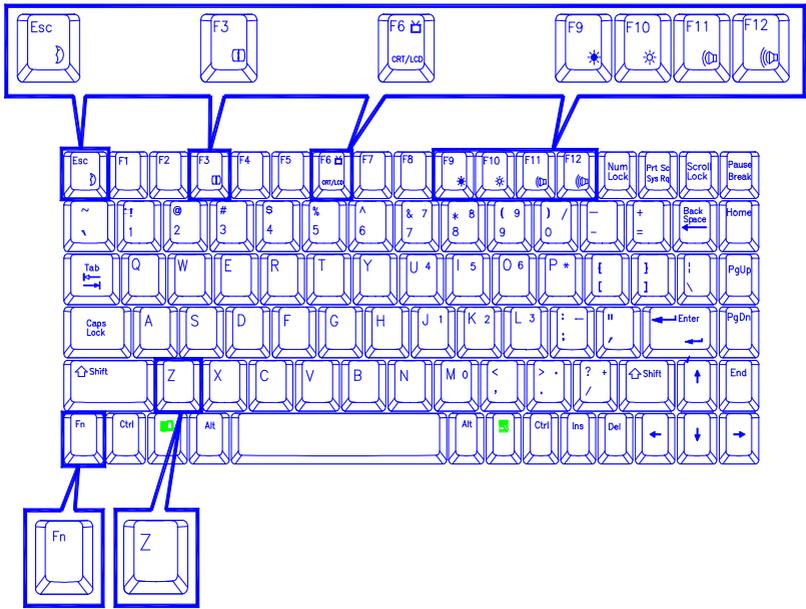


Figure 2-20

Using the Numeric Keypad

The Notebook features an 88-key keyboard with an embedded numeric keypad for numeric data input (Figure 2-21). The colored keys in the middle section of the keyboard will function as a Numeric Keypad. The numeric keypad is engaged when the NumLock LED indicator shines green light.

Follow these steps to access the Numeric Keypad:

- μ Press the **NumLock** Key to activate the Numeric Keypad.
- μ Press the **Fn** key and any colored key together to activate the Numeric Keypad.

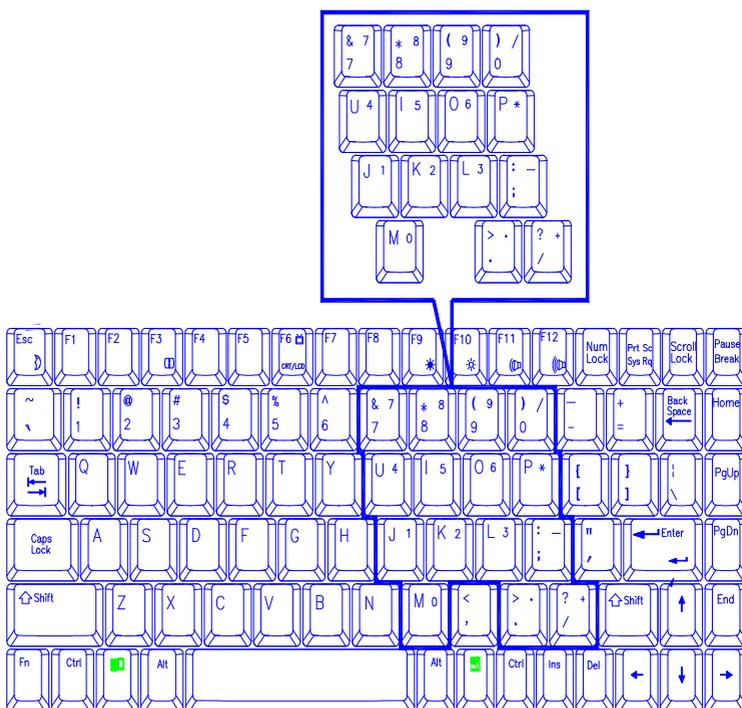


Figure 2-21

Using the Power Management

The Notebook provides you with some built-in power management features to reduce the power consumption without affecting the performance of the system in most application.

Advanced Power Management (APM 1.2)

The Notebook provides built-in Advanced Power Management (APM 1.2) supporting to reduce power consumption. **Some operating systems do not support APM, such as Windows NT, and therefore, cannot take advantage of the system's capabilities in this OS environment.**

Hard Disk Standby

The system will turn off the Notebook's hard disk drive after a specified period of inactivity. The Hard disk drive will be turned back on once the system attempts to read data from it or write data to it. You can adjust the Standby timeout period in the power menu of BIOS utilities

Global Standby

In Global Standby mode, the CPU clock will be stopped and most of the controllable peripheral devices will be powered off. If the idle timer expires before any system activity is detected, the system will change from Standby mode into Suspend mode.

Suspend and Resume

Under the circumstance of extremely low power, the system will stop all tasks stored them in memory to save the power. This is called Suspend mode. The Suspend Mode features three levels: Powered-On-Suspend (POS) mode, Suspend-To-RAM (STR) mode and Suspend-To-Disk (STD) mode.

Note: *Be sure not to initiate the Suspend Mode when any of the disk drives is accessed such as HDD, FDD and CD-ROM drive.*

The system operation can be returned to exactly where it was suspended when the wake-up event occurs. This is called Resume.

Powered On Suspend (POS)

In these two suspend modes, Powered-On-Suspend (POS) saves the less amount of power than STD (Suspend to Disk) mode. However, it takes the least time to return to full operation.

Resume from POS Mode

The system may be resumed from the Powered-On-Suspend mode by:

- μ Alarm resume (month/day/hour/minute): The system will resume at the specified time.
- μ Modem ring: The system will resume when a modem ring is detected. (COM port only)
- μ Any keyboard key pressed
- μ Depressing the power button (if configured as Suspend/Resume function under SCU)

Suspend To Disk (STD)

Suspend to Disk is a 0-volt suspend mode for system power management. STD mode saves more amount of power than POS mode but takes longer time to return to full operation.

1. Use your operating system's FDISK program to delete all partitions of the hard disk if any already exist on the target drive.
2. Boot the system from the drive A: and run the 0VMAKFIL.EXE Utility to create the Suspend to Disk partition on the hard disk. The size of the Suspend to Disk will accommodate **the installed DRAM (n) plus 4MB integrated video RAM.**

A:\>0VMAKFIL —Pn

For example, if the system DRAM is 32MB, 0VMAKFIL will create a partition size of approximately 36MB.

A:\>0VMAKFIL —P32

Note: *Rewrite the sector signatures if you need to partition the hard disk again.*

C:\>0VMAKFIL —PW

3. Use your FDISK program operating system to Re-partition the hard disk.

Resume from the STD Mode

The system may be resumed from Suspend-To-Disk mode by:

- μ Power back on
- μ Alarm resume (month/day/hour/minute): The system will resume at the specified time.

Attaching the Peripheral Devices

You can add a variety of external devices to your computer to expand your computing capabilities.

Attaching a Phone Line (option)

The notebook is equipped with a phone jack for connecting a phone line. To enable the function of a built-in modem, the users have to insert a modem card (Optional) into the socket on the mainboard and attach a phone cord to the jack.

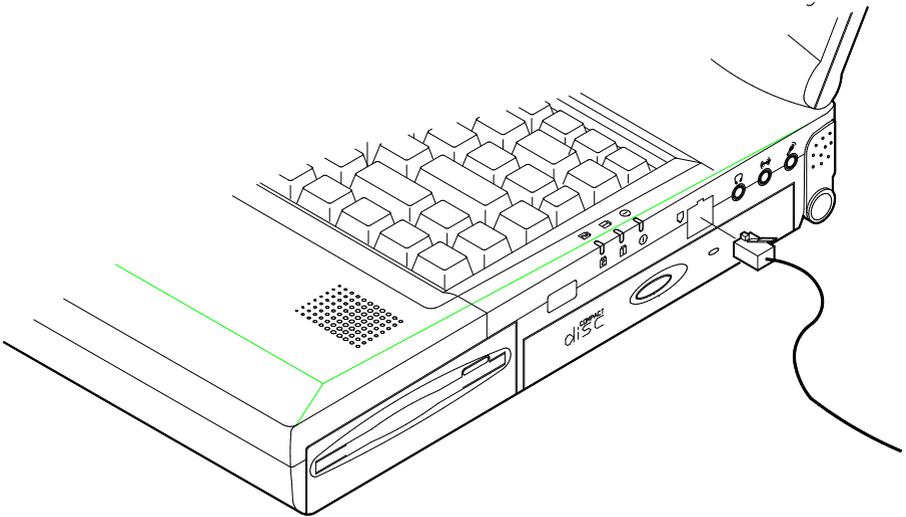


Figure 2-22

Attaching a PS/2 Keyboard or Mouse

The Notebook can be operated with an external PS/2 keyboard or mouse. Make sure the mouse or keyboard has a cable with 6-pin connector for the PS/2 port. If not, use the transfer cable that comes with your notebook.

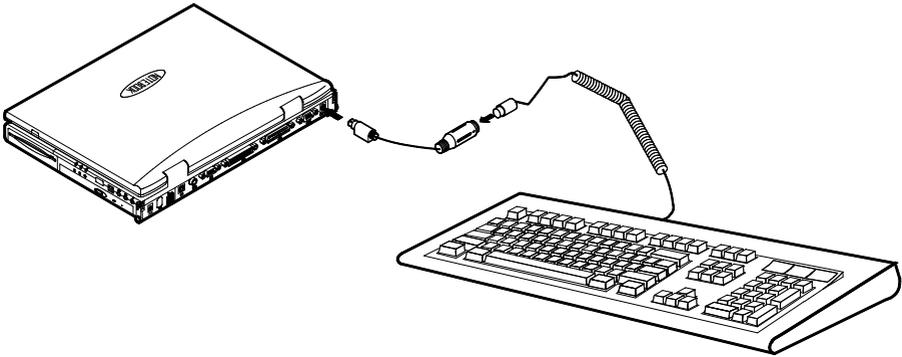


Figure 2-23

Attaching a Serial Mouse

The serial port features a 9-pin connector. You can connect any serial device such as a mouse to this port.

To connect a serial mouse, follow these steps:

1. Turn the system power off.
2. Connect the cable to the serial port on the rear panel of the Notebook Computer.
3. Tighten the screws to fasten the cable to the serial port.
4. Turn on the Notebook Computer.

In addition, you may need to install the manufacturer-supplied driver for the serial mouse. Refer to the device's user's guide for more information.

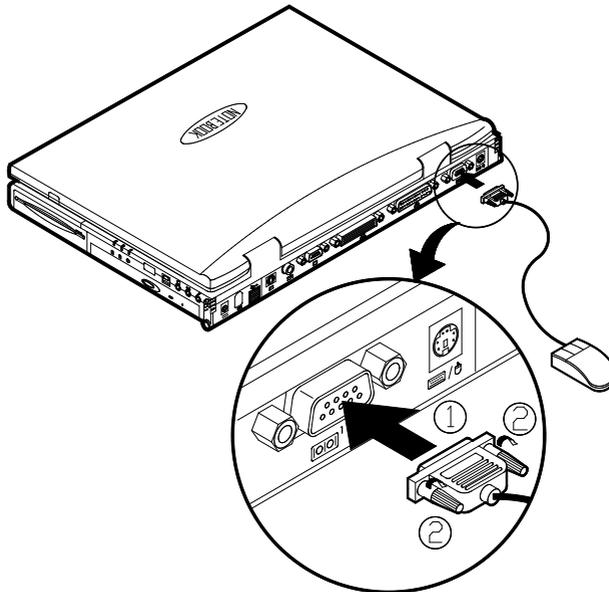


Figure 2-24

Attaching a Parallel Printer

You may connect any standard Centronics-compatible parallel printer to your Notebook through the parallel port.

To connect a printer, follow these steps:

1. Turn the system power off.
2. Connect the cable to the parallel port on the rear of the Notebook Computer.
3. Tighten the screws to fasten the cable to the parallel port (Figure 2-25).
4. Insert the other end of the cable to the printer's connector. Fasten the cable's connector.
5. Turn on the printer and Notebook Computer.

In addition, you will need to install the manufacturer-supplied driver for the printer. Refer to the device's user's guide for more information. If the connected printer supports EPP (Enhanced Parallel Port) or ECP (Extended Capabilities Port) mode, please enter System Configuration Utility (SCU) to configure the required setting.

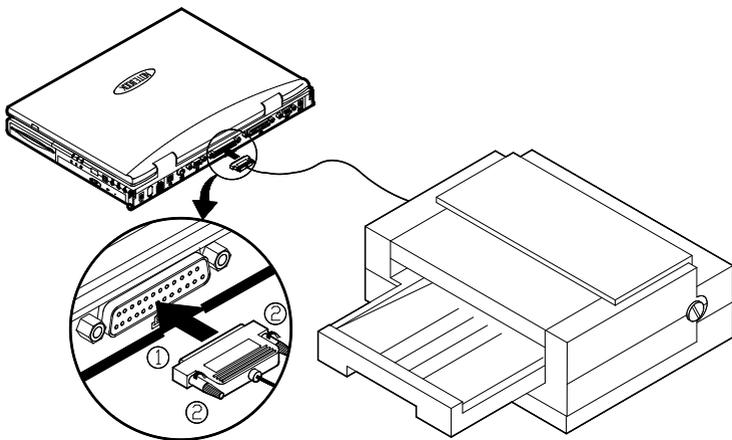


Figure 2-25

Attaching an External Monitor (CRT)

The computer is capable of displaying not only on the internal LCD, but also on an external XGA display monitor. Simultaneous display on LCD and External monitor is available. You may enter the System Configuration Utility (SCU) to select the appropriate parameters or use the **Fn + F6** keys (refer to *Chapter 2, Using Hot Keys*) to change the display setting.

To connect an External Monitor, follow these steps:

1. Turn the system power off.
2. Connect the cable to the CRT port on the rear panel of the Notebook Computer.
3. Tighten the screws to fasten the cable to the CRT port.
4. Insert the other end of the cable to the external monitor.
5. Turn on the Notebook Computer.

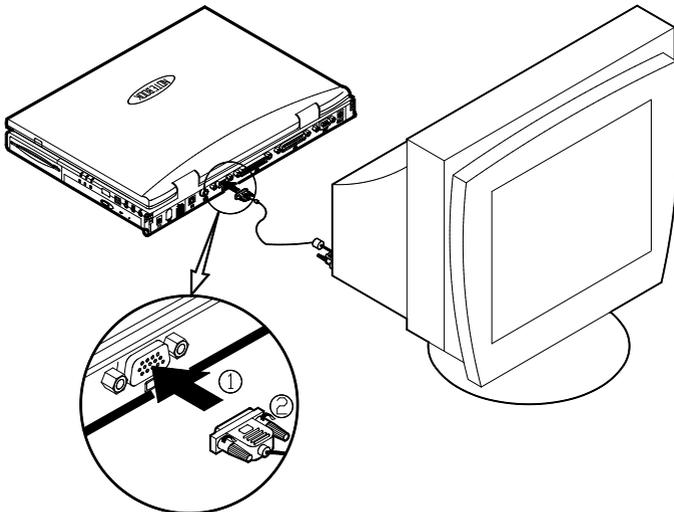


Figure 2-26

Attaching a Proprietary Port Replicator

The proprietary Port Replicator provides interfaces for those found on the Notebook system. It can free you from fumbling with multiple cables every time you leave the office. Please contact your dealer for detailed information.

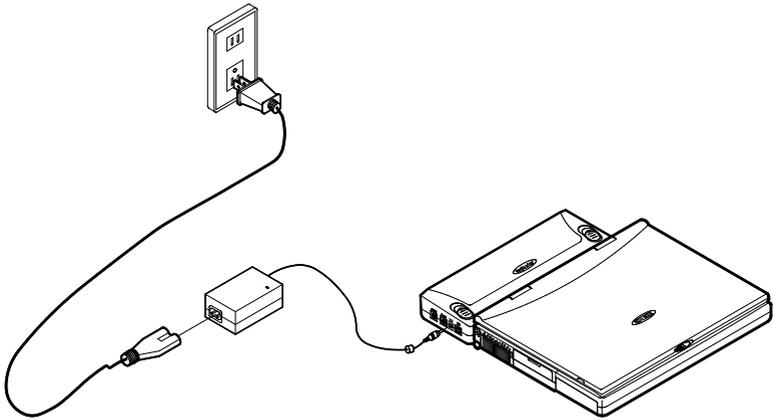


Figure 2-27

Attaching a Video Input Device

The RCA jack on the rear panel of the Notebook allows analog composite signal input from external video devices. You can connect a CCD to the RCA jack.

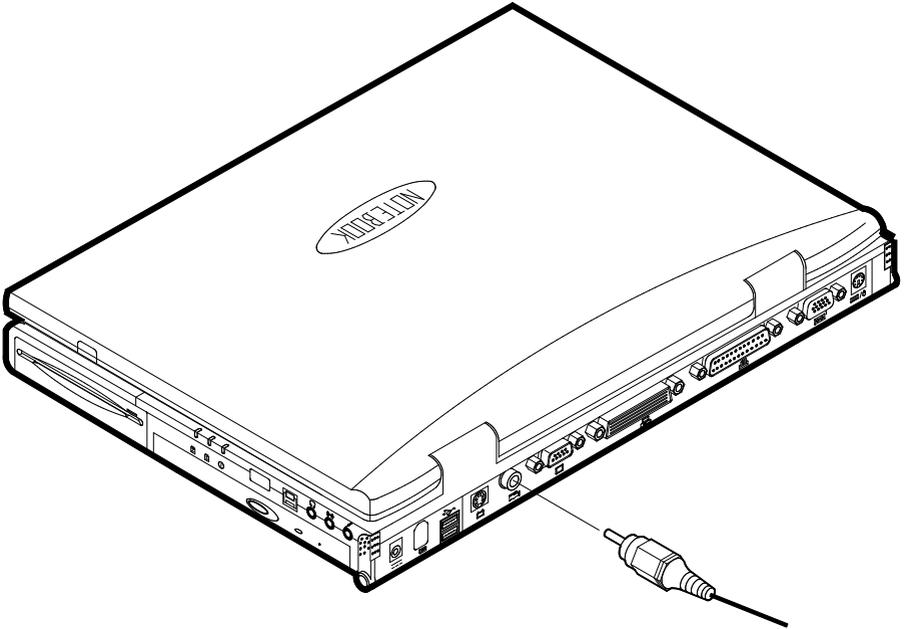


Figure 2-28

Attaching a TV Set

The S-video jack on the rear panel of the Notebook is used for transmitting video signals to a TV set. You may select the video standard for video display. Enter the System Configuration Utility (SCU), Components Menu to specify the appropriate TV mode. Simultaneous display on external monitor (CRT) and TV is available. You may enter the SCU to select the appropriate parameters or use the **Fn + F6** keys (refer to *Chapter 2, Using Hot Keys*) to change the setting.

See figure 2-31 for information on attaching a TV set.

Note: *Different countries use different TV broadcast standards. A TV set must comply with the appropriate standard to properly receive the broadcast signals. You should refer to your TV user guide to make sure which TV standard you are using.*

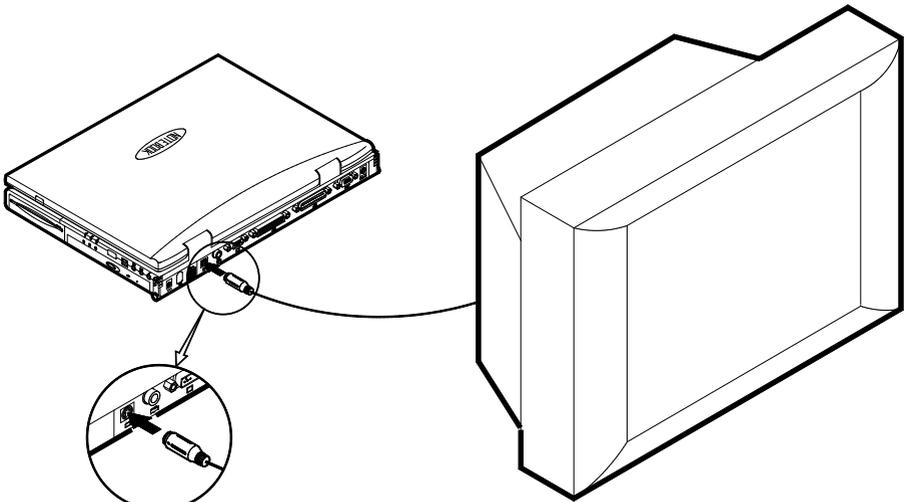


Figure 2-29

Attaching a USB-compatible Device

The Notebook provides a USB port for connecting an USB-compatible keyboard, mouse or other devices. See Figure 2-30 for information on connecting a serial mouse.

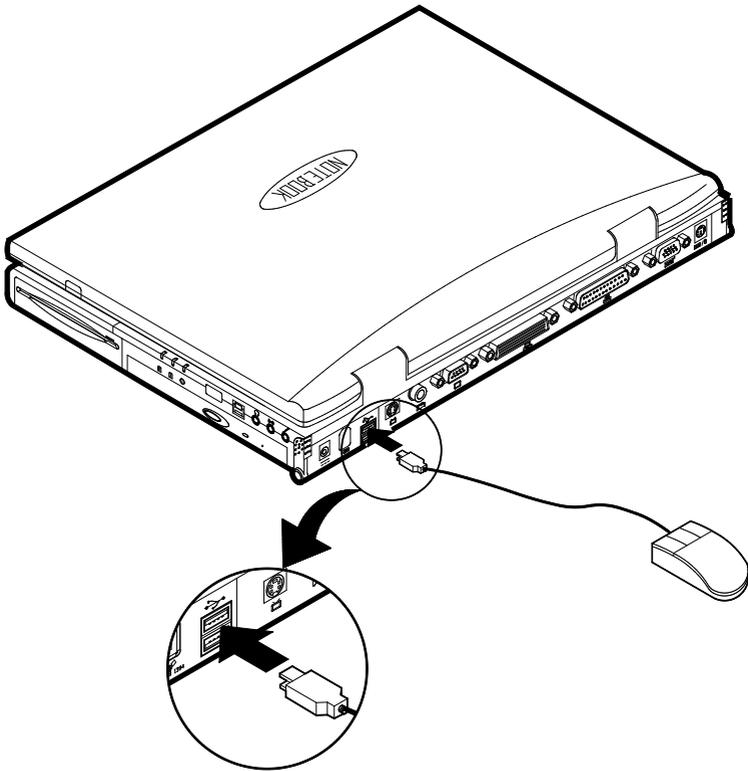


Figure 2-30

Chapter 3 BIOS Utilities

This chapter provides information regarding the Power On Self Test (POST) and shows you how to use the System Configuration Utility (SCU) to configure the system parameters. The settings made in BIOS SCU will affect the performance of the notebook.



Power On Self Test (POST)



System Configuration Utility (SCU)

Power On Self Test (POST)

The system BIOS (Basic Input/Output System) performs a series of Power On Self Test (POST) on system memory and key computer components when the computer is turned on every time. If an error exists, the POST routine may halt execution (depending on the seriousness of the problem). The POST also initializes BIOS configuration then boots the operating system.

POST Message: Normal Operation

You will see the following message if no error exists after the POST is performed

Note: You may press the Spacebar key to skip the memory test.

SystemSoft BIOS MobilePRO BIOS Version 1.01 (2482-00)-(R1.00.tr10)
Copyright 1983-1996 SystemSoft Corp. All Rights Reserved

333 MHz Celeron with MMX CPU

L2 Cache: 128K installed

4 MB Video RAM

SystemSoft Plug-n-Play BIOS Ver 1.17.01

Base Memory 000640 Kb

Extended Memory 007168 Kb

Total Memory 008192 Kb

Auto Detecting IDE Devices [Done]

<CTRL-ALT-S> to enter System Configuration Utility

POST Message: Error Detected

If an error is detected, a WARNING message will be displayed. You should either press **F1** key to continue, or press the **Ctrl-Alt-S** keys simultaneously to enter the System Configuration Utility.

SystemSoft BIOS MobilePRO BIOS Version 1.01 (2482-00)-(R1.00.tr10)
Copyright 1983-1996 SystemSoft Corp. All Rights Reserved

333 MHz Celeron with MMX CPU

L2 Cache: 128K installed

4 MB Video RAM

SystemSoft Plug-n-Play BIOS Ver 1.17.01

Base Memory 000640 Kb

Extended Memory 007168 Kb

Total Memory 008192 Kb

WARNING – HARD DISK CONTROLLER 1 FAILURE

Auto Detecting IDE Devices [Done]

<CTRL-ALT-S> to enter System Configuration Utility

Press F1 to Continue

System Configuration Utility

The System Configuration Utility (SCU) is a ROM-based configuration utility that displays the system's configuration status and provides users with a tool to set their system parameters. The settings are stored in battery-backed CMOS RAM which saves the information even when the power is turned off, and retains it when the system is turned back on.

Information in the System Configuration Utility

The following shows the main menu and its submenu that may be changed within the System Configuration Utility.

Menu Bar Items	Pull-down Menu Items
Startup	Date and Time, Fast Boot, Boot Device, Display, Enable Battery Low Beep, Enable LCD expand Mode, Enable Power On Beep, Boot Password, SCU Password.
Memory	Cache Systems.
Disks	Diskette Drives, IDE Settings, Enable LS120/ZIP100 Drive.
Components	COM Ports, LPT Port, PS/2 Mouse Port, Microsoft IntelliMouse Support, Keyboard Numlock, Keyboard Repeat, TV Mode, Video In Enabled, ZV Port Enabled.
Power	Enable Power Saving, Low Power Saving, Medium Power Saving, High Power Saving, Customize, Suspend Controls, Resume Timer, Enable MODEM Ring Resume, Enable Battery Low Suspend, Advance CPU Controls.
Exit	Save and Exit, Exit (No Save), Default Settings, Restore Settings, Version Info.

Initiating the System Configuration Utility

The System Configuration Utility (SCU) will be accessed when pressing the **Ctrl**, **Alt**, and **S** keys simultaneously.

<CTRL-ALT-S> to enter *System Configuration Utility*

The above message only lasts seconds. If you miss it, the computer will initiate the boot process. You must reboot the system and try again within the time limit if you want to enter the System Configuration Utility.

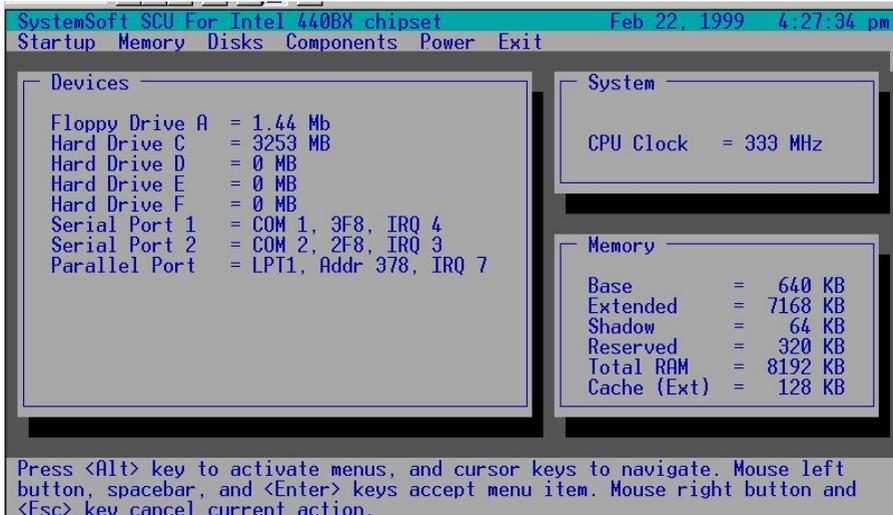


Figure 3-1

System Configuration Utility (SCU)

Working with the Menu Bar (Main Menu)

After entering the SCU, you may use the following keys to work with the menu bar (main menu).

Action	Keys Used	Description
Activate menus	Alt	Activate the System Configuration Utility.
Select menu bar item	Left arrow (←)	Move to a menu bar item on the left.
	Right arrow (→)	Move to a menu bar item on the right.
	The highlighted letter key	Move to the corresponding menu bar item.
Accept menu item	Mouse left button Spacebar Enter	Enter the selected menu bar item to configure settings.
Cancel current action	Mouse right button Esc	Undo the current command.

Working with the Pull-down Menu (Submenu)

When the desired menu bar (main menu) item is highlighted, press the **Enter** key to enter the pull-down menu (submenu) for values setting. You may use the following keys to work with the pull-down menu.

Action	Keys Used	Description
Select pull-down menu item	Down arrow (↓)	Move to the next pull-down menu item.
	Up arrow (↑)	Move to the previous pull-down menu item.
	The highlighted letter key	Move to the corresponding pull-down menu item.
Select a control	Tab	Move between the options.
Change values	Down/Up arrows (↓)(↑)	Modify the settings.
Accept entries	Spacebar	Enable/disable the specified function. When a check mark (√) appears, the function is on.
	Enter	Choose <OK> from a list of options.
Reject entries	Esc	Undo the current setting.
	Enter	Choose <Cancel> from a list of options.
Activate accelerators	Alt	Initiate all the highlighted letters corresponding to their respective options.
Quit	Esc	Press the Esc key to close the pull-down menu.

Features of the System Configuration Utility

Startup Menu

Item	Setting/Option	Function	
Date and Time	Day/Month/Year Hour/Minute/Second	Set the current date and time.	
Fast Boot	Enable	Initialize and quickly boot the system in a few seconds by skipping certain diagnostic tests.	
	Disable	Disable the above.	
Boot Device	1 st Boot device	Hard Disk C	Select one of these drives as 1 st choice for the BIOS for booting the system.
		CD-ROM Drive	
		Diskette A	
	2 nd Boot Device	Hard Disk C	Select one of these drives as 2 nd choice for the BIOS for booting the system.
		CD-ROM Drive	
		Diskette A	
	3 rd Boot Device	Hard Disk C	Select one of these drives as 3 rd choice for the BIOS for booting the system.
		CD-ROM Drive	
		Diskette A	
Display	LCD	Activate the system's LCD panel.	
	CRT	Activate an external monitor	
	LCD+CRT	Activate both the LCD and the CRT.	
	TV	Activate an external TV.	
	LCD+TV	Activate both the LCD and the TV.	
	CRT+TV	Activate both the CRT and the TV.	
	LCD+CRT+TV	Activate all the LCD, CRT and the TV.	
Enable Battery Low Beep	Enable	The system emits a series of warning beeps sound when the battery power becomes low.	
	Disable	Disable the above.	

Item	Setting/Option	Function
Enable LCD Expand Mode	Enable	Stretch the display to fill the entire viewing area of the LCD panel.
	Disable	Disable the above.
Enable power on Beep	Enable	The system emits a beep sound when the system power is on.
	Disable	Disable the above.
Boot Password	Enter old Power-On Password	Set password for booting computer. Users are authorized to start the system after entering correct password.
	Enter new Power-On Password	
	Verify new Power-On Password	
	Enable Password to Power-On	
SCU Password	Enter old Setup Password	Set password for modifying SCU. Users are authorized to change the SCU setting after entering correct password.
	Enter new Setup Password	
	Verify new Setup Password	
	Enable Setup Password	

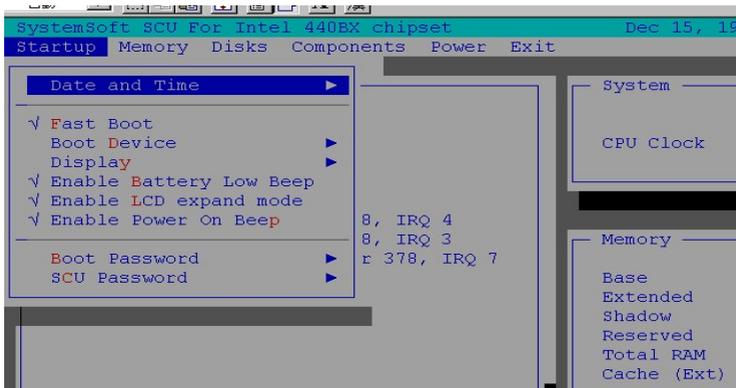


Figure 3-2 Startup Menu Chapter 3—BIOS Utilities 3-9

Memory Menu

Item	Setting/Option	Function	
Cache Systems	L1 Cache	Disabled	Disable the processor's internal cache.
		Write Back	Enable the write-back policy for L1 memory to access only when necessary to update the cache contents with changes for faster performance.
	L2 Cache	Disabled	Disable the L2 cache controller.
		Write Back	Enable the write-back policy for L2 memory to access only when necessary to update the cache contents with changes for faster performance.
	BIOS Shadow	Cached	The process of <i>shadowing</i> copies instructions from system BIOS into RAM to improve system performance.
		Not Cached	Disable the above.
	Video Shadow	Cached	The process of <i>shadowing</i> copies instructions from video BIOS into RAM to improve system performance.
		Not Cached	Disable the above.

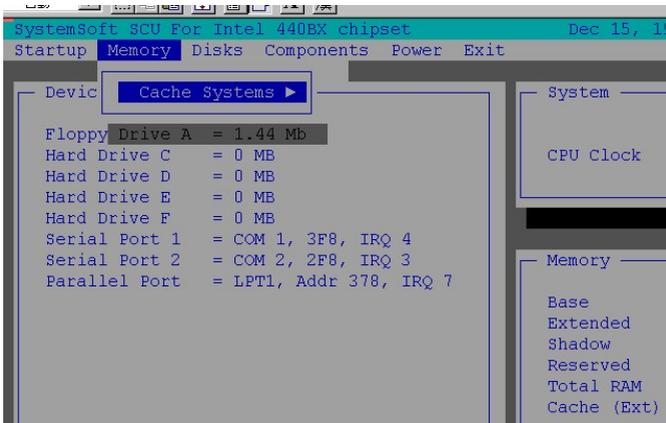


Figure 3-3 Memory Menu

Disks Menu

Item	Setting/Option		Function
Enable LS120/ ZIP100 Drive	Enable		Enable or disable LS120 /IOMEGA ZIP 100 support.
	Disable		
Diskette Drives	Drive A	None	Configure diskette drives A and B.
		1.44 Mb	
		2.88 Mb	
IDE Settings	Primary HDD	Drive Enabled	Enable enhanced IDE settings. (This model does not support ZIP device).
		PIO Mode	
	CD-ROM/DVD- ROM	Drive Enabled	
		PIO Mode	
	LS120/ZIP/2nd HDD	Drive Enabled	
		PIO Mode	

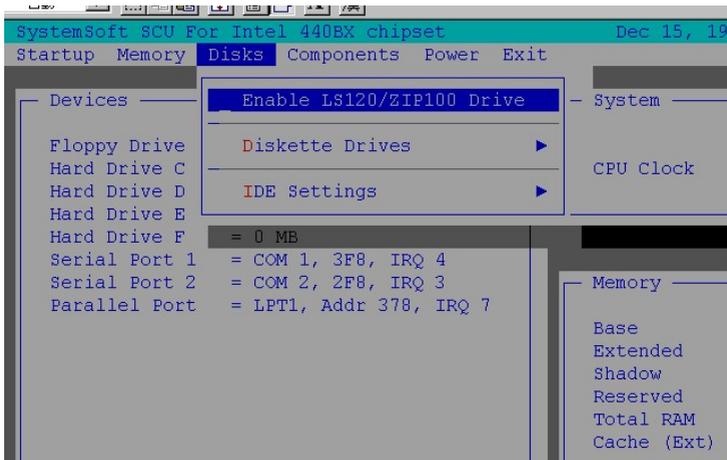


Figure 3-4 Disks Menu

Components Menu

Item	Setting/Option	Function	
COM Ports	COM A I/O Settings	None	Specify the COM A configuration. (COM3 & COM4 only for DOS mode & Non-PnP OS)
		COM1, 3F8, IRQ4	
		COM2, 2F8, IRQ3	
		COM3, 3E8, IRQ10	
	COM B I/O Settings	None	Specify the COM B configuration. (COM3 & COM4 only for DOS mode & Non-PnP OS)
		COM1, 3F8, IRQ4	
		COM2, 2F8, IRQ3	
		COM3, 3E8, IRQ10	
	Mode Setting For COM B	Normal (16550)	Define the COM B hardware.
		IrDA (HPSIR)	
		ASK IR	
		FAST IR	
	DMA Setting For Fast IR	DMA 0	Set the DMA channel for the Infrared port if FIR mode is used.
DMA 1			
DMA 3			
LPT Port	Port Address	None	Select parallel (printer) port I/O address and IRQ assignment.
		LPT1, Addr 378, IRQ7	
		LPT2, Addr 278, IRQ5	
		LPT3, Addr 3BC, IRQ7	
	Port Definition	Standard AT (Centronics)	
		Bidirectional (PS-2)	
		Enhanced Parallel (EPP)	
		Extended Capabilities (ECP)	
	DMA Setting For ECP Mode	DMA 1	Set the DMA channel for the parallel port if the ECP mode is used.
		DMA 3	
	EPP Type	EPP 1.7	Set the current type for EPP.
		EPP 1.9	

Item	Setting/Option	Function	
PS/2 Mouse Port	Enable	Enable Onboard PS/2 Mouse Port.	
	Disable	Disable the PS/2 mouse if IRQ resource is not enough.	
Microsoft Intellimouse Support	Enable	Support PS/2 mouse with the wheel button.	
	Disable	Do not support PS/2 mouse with the wheel button.	
Keyboard Numlock	Enable	Specify whether Num Lock is on or off at system boot time.	
	Disable		
Keyboard Repeat	Key Repeat Rate	2 cps	Define the rate (characters per second) at which the keyboard repeats while a key is depressed.
		6 cps	
		10 cps	
		15 cps	
		20 cps	
	Key Delay	30 cps	The repeat key feature will be delayed by the selected time value.
		1/4 sec	
		1/2 sec	
TV Mode	TV Modes Selection	NTSC	Specify the TV mode as NTSC, PAL, or NTSC-Japan
		PAL	
Video In Mode	Video In Modes Selection	Enable	Support the Video input mode
		Disable	Do not support Video input mode

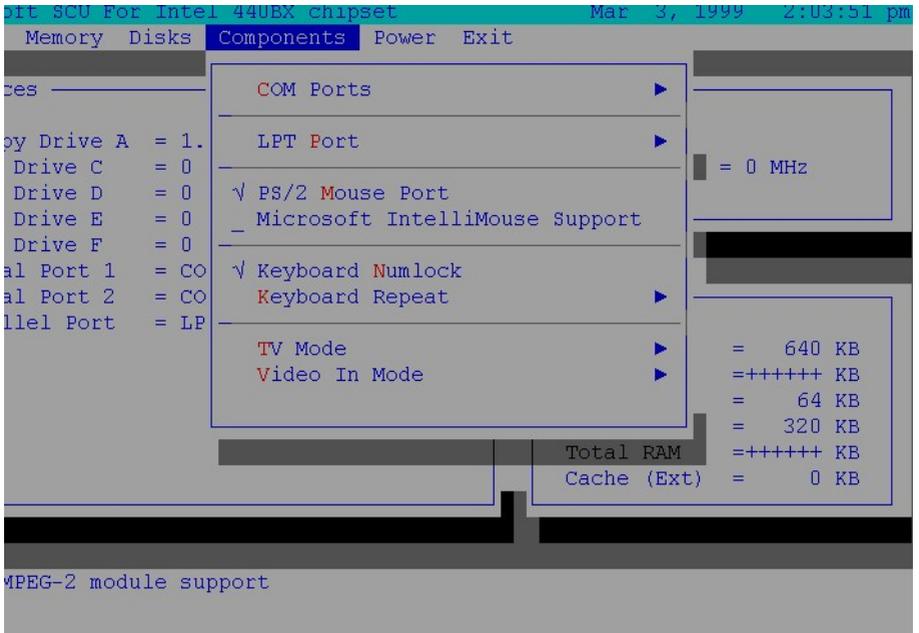


Figure 3-5 Components Menu

Power Menu

Item	Setting/Option		Function
Enable Power Saving	Enable		Enable/Disable all power saving features.
	Disable		
Low Power Saving	Enable		Enable/Disable the power saving to its lowest settings which results in max performance but shortest battery life.
	Disable		
Medium Power Saving	Enable		Enable/Disable the power saving to its medium settings which results in both moderate performance and battery life.
	Disable		
High Power Saving	Enable		Enable/Disable the power saving to its highest setting which results in min. performance but longest battery life.
	Disable		
Customize	Disk Standby	Always on	The hard disk will be powered down if it is not accessed within the specified period. Hard disk power will be restored when the disk drive is accessed again.
		5 sec	
		10 sec	
		15 sec	
		20 sec	
		30 sec	
	Global Standby	Always on	The system power will be reduced if the system has been idle for the specified period. System power will be restored when any system activity is detected.
		1 min	
		2 min	
		4 min	
		6 min	
		8 min	
		12 min	
		16 min	

Item	Setting/Option		Function
Suspend Controls	Power Button Function	Power On/Off	The power button is switched to turn the system on or off.
		Suspend/Resume	The power button acts as a suspend/resume button for switching the system between a working state and the suspend mode.
			Pressing the power button for more than four seconds will generate a power button over-ride event to switch the system from a working state to the Soft-Off state.
	Suspend Type	Suspend To Disk	Specify the type of hardware suspend mode for power management.
		Suspend To RAM	
		Powered On Suspend	
	Suspend Timeout	Never	If the system has been idle for the specified period, the system will enter user-defined suspend.
		1 min	
5 min			
10 min			
20 min			
Resume Timer	Alarm Resume	Enable	Resume the system from the configured suspend mode when resume alarm timer expires.
		Disable	
	Resume Month/Day/Hour/Minute		The system will resume at the specified time (month, day, hour and minute).

Item	Setting/Option	Function
Enable MODEM Ring Resume	Enable	Resume the system from suspend mode when a modem ring is detected.
	Disable	Disable the above.
Enable Battery Low Suspend	Enable	Enable suspend to disk on a low battery condition.
	Disable	Disable the above.
Advance CPU Controls	Clock Control Mechanism	Full Speed
		Doze Mode

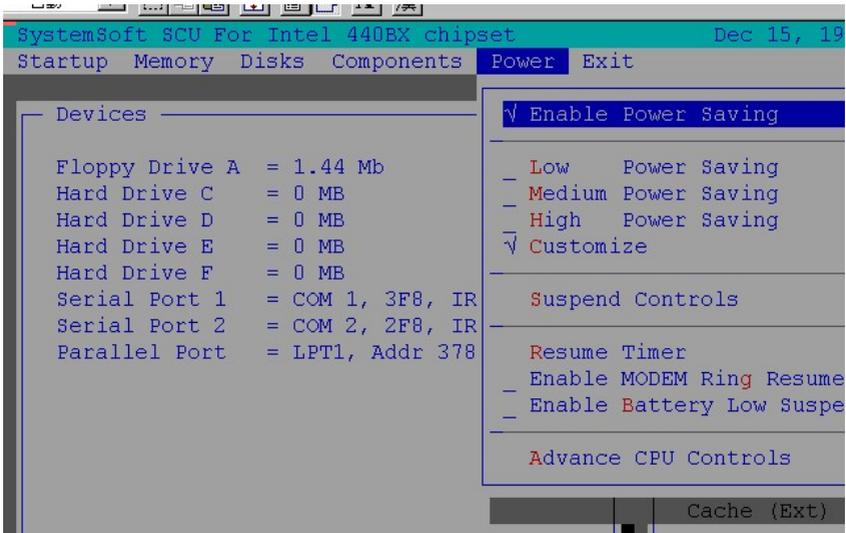


Figure 3-6 Power Menu

Exit Menu

Item	Function
Save and Exit	Save the current settings and reboot the system.
Exit (No Save)	Exit without saving any current changes.
Default Settings	Set the current setup to default settings (the original ones found in ROM).
Restore Settings	Restore the current setup settings to the original custom ones.
Version Info	Show current BIOS version information.

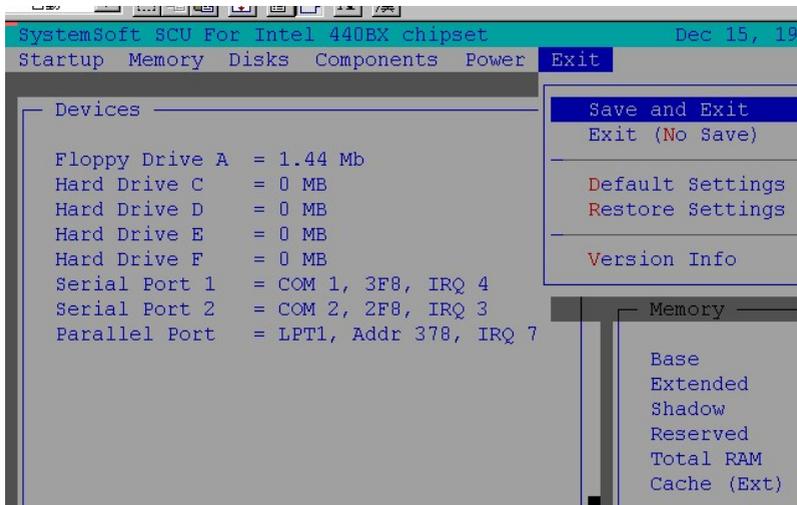


Figure 3-7 Exit Menu

Chapter 4 Troubleshooting

Sometimes your computer has some problems. Before you consult the computer vendor, you can try to solve problems yourself. This chapter provides you with a list of some commonly experienced problems and their possible solutions.



Battery



Power



Hard Disk Drive



Floppy Disk Drive



Hardware Installation



LCD Panel



Memory Module



PC Card



Boot Password



Audio



CD



Printer

Battery

Problem: *The battery pack can not be charged.*

Solution 1 : The battery pack is exposed to excessively hot and cold environment. Let it restore to normal condition before you use it.

Solution 2 : The power might be used up.

Problem: *The battery pack can not be charged and the charge indicator turns off.*

Solution 1 : The battery has been fully charged.

Solution 2 : The battery pack is exposed to excessively hot or cold environment. Let it restore to normal condition before you use it.

Solution 3 : The battery pack is used up.

Problem: *The beep sound is heard and the low-battery indicator turns on.*

Solution : The computer is in low-battery status. Please connect your computer with AC adapter, or press Fn + Esc key combination to enter suspend mode.

Problem: *The beep sound isn't heard whereas the low-battery indicator turns on, or the gauge indicates power is less than 10%.*

Solution : The computer is in low battery status. Please adjust the volume control and connect the computer with AC adapter.

Problem: *The actual battery operation time is shorter than expected.*

Solution 1 : The battery is exposed to excessively high or low temperature.

The ideal temperature for battery operation is between 50°F and 95°F (10°C and 35°C) whereas keeping is between 32°F and 113°F (0°C and 45°C).

Solution 2 : The battery has released some power. Please recharge it.

Solution 3 : The power management has been turned off.

Solution 4 : Some peripheral device or PC card is consuming power. Turn off the unused device to save power.

Solution 5 : The battery has been given a partial charge. When charging, always fully charge after fully discharge.

Power

Problem: *The computer can not boot when the battery pack is not inserted.*

Solution 1 : The power cord is not correctly connected with AC adapter. Make sure the power cord is firmly plugged into grounded outlet and computer.

Solution 2 : The grounded outlet is not in normal operation. Check the outlet's function or use other outlet.

Problem: *The system has automatically entered suspend mode.*

Solution 1 : The system's temperature is too high. Let it cool before you use it.

Solution 2 : The system has entered suspend mode after a specified period of time. Please press any key or touch the trackpad to wake up

the computer.

Hard Disk Drive

Problem: *The message “Nonsystem disk” appears.*

Solution : The computer is trying to boot from the floppy including no software. Please take the floppy out and restart the computer.

Problem: *It needs a longer time to read the hard disk drive after restarting the computer.*

Solution 1 : The data saved on hard disk drive may be lost. Please operate the “disk defragmenter” to check the lost unit.

Solution 2 : As in low battery status, the computer is waking up from the suspend mode.

Floppy Disk Drive

Problem: *The floppy disk drive can not write data to disk.*

Solution 1 : The floppy is not formatted.

Solution 2 : The floppy is write-protected. Please cancel the protection.

Solution 3 : The data is written to incorrect disk drive.

Solution 4 : The space left on disk is not enough. Please use a new disk or delete the unneeded data.

Problem: *The disk drive can not read the disk.*

Solution 1 : The disk is not formatted.

Solution 2 : The disk is damaged.

Solution 3 : An incorrect disk type is used.

Hardware Installation

Problem: *The computer can not recognize the device as part of the system.*

Solution 1 : The power switch of new device is not turned on. Please turn on the power switch, then restart the computer.

Solution 2 : You do not rearrange the computer after the device is installed.

Solution 3 : The power cord or the connector between device and computer is plugged out. Please make sure the device is firmly connected with the computer.

Solution 4 : You do not follow the system configuration as the computer suggested. Please follow the suggestion.

LCD Panel

Problem: *The font is too dark.*

Solution : The brightness or contrast is not correctly set. Please press Fn+F7 or Fn+F8 key combination (only limited to DSTN panel) to adjust the contrast control, and use Fn+F9 or Fn+F10 to adjust the brightness control.

Problem: *The screen is blank.*

Solution 1 : The panel blank application might be set.

Solution 2 : The system operates the screen saver after a specified period of time. Please press any key or touch the trackpad.

Solution 3 : The brightness or contrast needs to be adjusted. Please press Fn+F7 or Fn+F8 key combination (only limited to DSTN panel) to adjust the contrast control, and use Fn+F9 or Fn+F10 to adjust the brightness control.

Solution 4 : The system has entered suspend mode. Please press any key or touch the trackpad to wake up the computer.

Problem: *The LCD panel displays incorrect font or blinks when the computer is connected with an external monitor.*

Solution : The resolution you use for the monitor exceeds that the LCD panel can support whereas you have switched to the LCD panel. Please restart the computer.

Memory Module

Problem: *The computer can not boot.*

Solution : The incorrect type of memory module is installed.

Problem: *The memory capacity is not enough.*

Solution : The memory is not correctly configured for the application.

Problem: *The detected memory capacity is not correct.*

Solution : Some memory module is not correctly installed or not compatible with your computer.

Problem: *The message “out of memory” is displayed.*

Solution : The memory configuration is not correctly set or the memory is not enough to run the application.

Problem: *The message “insufficient memory” is displayed.*

Solution : The application can not be operated as the memory is used up.

PC Card

Problem: *The PC card can not be configured.*

Solution : The PC card is not supported.

Problem: *The system can not recognize the PC card.*

Solution 1 : The PC card is not completely inserted into the socket or inserted in reverse.

Solution 2 : The PC card driver is not installed.

Solution 3 : The PC card or card driver is not compatible with the computer.

Problem: *The beep sound is not heard while the PC card is inserted into.*

Solution : The beep sound control is closed.

Boot Password

Problem: *You forget the boot password.*

Solution : While forgetting the password, you must unpack the computer and delete the memory. Please ask the vendor for help.

Audio

Problem: *The audio speaker can not be heard.*

Solution : The volume might be set too low. Please check your volume control.

Problem: *The volume is too high (or too low).*

Solution : The volume is not correctly set. Please check your volume control.

Problem: *The headphone can not be heard.*

Solution 1 : The volume is not correctly set. Please check the volume control.

Solution 2 : The volume source is not chosen.

Solution 3 : The headphone is plugged into the wrong jack.

CD

Problem: *The compact disk can not be exited.*

Solution : The compact disk is not correctly placed in the tray.

Problem: *The compact disk can not be read.*

Solution 1 : The compact disk is not correctly placed in the tray.

Solution 2 : The compact disk is dirty. Please clean it with a CD-ROM cleaner kit.

Problem: *The musical compact disk can be read while the data disk can not.*

Solution : The compact disk hardware for reading data needs to be checked.

Problem: *All compact disks can not be read.*

Solution 1 : The Windows system can not recognize the CD-ROM drive or the CD-ROM drive is not compatible with other devices.

Solution 2 : The compact disk is dirty. Please clean it with a CD-ROM cleaner kit.

Solution 3 : The compact disk hardware for reading data needs to be checked.

Printer

Problem: *The printer can not be set up.*

Solution : The printer power cord is not plugged into or the connector is not correctly connected.

Problem: *The printer can not work.*

Solution 1 : The printer is not powered on. Please turn on the printer.

Solution 2 : The printer is not in “connected” status. Please set the printer in “connected” status.

Solution 3 : The printer paper is used up. Please add the paper.

Solution 4 : The printer driver is not installed or correctly chosen. Please check the system.

Solution 5 : The printer for network is not connected with the network.

Problem: *The printer prints incorrect data.*

Solution 1 : The printer driver is not installed or correctly chosen.

Solution 2 : The printer power cord is not plugged into or the connector is not correctly connected.

ATI DVD Play (Optional)

Problem: *When the DVD station is playing, pressing any (Fn) Hot keys quickly at the same time, the DVD station will stop running in the normal Windows system.*

Solution : Please avoid pressing the Hot key quickly and continuously. For example, when use the Fn key, stopping seconds each time before pressing again. Or go to Windows 95/98, click the icon of volume at the right-bottom corner the voice volume.



Chapter 5 Installing Drivers

This chapter provides users the step-by-step instructions of installing device drivers and utilities. This chapter is designed for notebook beginners as well as advanced users. Please follow the steps and suggestions below to start a new notebook computer work.

Use the CD for drivers in the Package; prepare a DOS startup disk and DOS files before installing drivers for the first.

For more details and operating help, please contact your service dealer.



Installing Windows 95



Installing Windows 98



Drivers for Windows 95



Drivers for Windows NT4.0



Drivers for Windows 98

Preparation

Preparation for a new notebook:

1. Use a DOS startup disk to start the Notebook Computer.
2. Run FDISK utility from DOS to create a bootable partition.
After A: prompt, type fdisk. (A: fdisk) Choose "1" to create hard disk as drive C:

(See DOS manual for the operation detail.)
3. Format hard disk. Follow the command "Format C:/S" to create a bootable hard disk and a bootable floppy disk. (A: format C) (C:/S copies system files to the formatted disk)
4. Copy the file [MSCDEX.EXE] from DOS disk to drive C:
5. Insert the disk of the CD-ROM driver. Type "Install" after A prompt (A: install) See the driver manual for detail.
6. Restart the system

Installing Windows 95 (For Reference)

1. Start DOS.
2. Insert the Windows 95 CD-ROM.
3. Go to the "setup" directory
4. After the directory prompt, type "setup", then press [Enter].

-
5. After the Windows 95 setup program performs a routine check on your system, press [enter] to continue.
 6. When the “Welcome to Windows 95 Setup” screen appears, click “Continue”.
 7. Click “Yes” on the “License Agreement” screen.
 8. Click “Next” to select “Collecting Information about your computer”.
 9. Click “Next” to select the default of “C:\WINDOWS”, or enter a different directory.
 10. On the screen of “Setup Options”, select “Portable”, then click “Next”.
 11. On the screen of “Certificate of Authenticity”, enter the Product Identification Number, then click “Next”.
 12. On the screen of “User Information”, enter your name and company, then click “Next”.
 13. Analyzing your computer, click “Next”.
 14. Select “Install the most common components (recommended)”, then click “Next”.
 15. On the screen of “Startup Disk”, insert a blank diskette into drive A to create a startup diskette.
 16. The Setup Wizard is now copying files. After the copying is finished, remove the disk, then click “OK”.
 17. Click “Next” to start copying Windows 95 files to your computer.
 18. Click “Finish” to restart Windows 95.
 19. On the screen of “Set Up a Printer”, click “Cancel”.
- Note:** *Do not install a printer at this time. You will not be able to access the Windows 95 Installation CD until you reboot.*
20. Click “OK” to restart the computer.

Installing Windows 98 (For reference)

1. Start DOS.
2. Insert the Windows 98 CD-ROM.
3. Go to the “setup” directory, type “setup”, then press [Enter].
4. Follow the instructions on the screen and choose the recommended option.
5. The Windows 98 setup program will check the hard disk drive automatically.
6. When the setup initializes, click “Continue”.
7. Choose “License Agreement” to agree the Contract.
8. Click “Next” to type the product ID number.
9. Click “Next”. The program will automatically check the system.
10. Choose the directory for your computer. Select the path of “C:\Windows”, or type another path.
11. For reinstallation, choose “Yes” (recommended) to keep the files.
12. Select your location.
13. To create a Win98 Startup disk, insert a floppy disk into drive A. To create the startup disk later, choose “Cancel”.
14. Press “Next”. The program will copy files to your computer’s hard disk.
15. At the same time, the screen will show the Win98 concerned information and the setup items one by one.
16. After the automotive setup stops, restart the computer.

Installing Drivers in Windows 95

Step 1: Run USB supplement path update file

- μ After finishing Win95 ORS2.1 installation, go to Win95
- μ Download the file <USB supplement path update file> from Microsoft Web Site to run the USB supplement path.

Step 2: Installing TXPATCH Driver

- μ Open the driver “[TXPATCH] Intel 82371xb.inf TX” from the path of CD-ROM Drive.
- μ Run “setup.exe”.
- μ Follow the instruction to finish the installation.
- μ Restart the system.

Step 3: Installing VGA Driver

- μ Click “Start”
- μ Select “Run”
- μ Open the path “D:\Video\WIN9X.
- μ Run”setup.exe” to finish installation.

Note: When ATI VGA driver has been existed in Win95 system, Click [Start]. Select [Run]. Open the path “atiunst-clean”, and then double-click “OK” to uninstall the original VGA drivers and then update the VGA drivers.

Step 4: Installing Audio Driver

- μ Click “Start”.
- μ Select “Settings”.
- μ Click “Control Panel”/”System”/”Device Manager”.
- μ Select “Other devices”.
- μ Remove “Unknown Device”.
- μ Click “OK”, then restart the system.
- μ After entering into WIN95 system, the program will automatically go to the “Add New Hardware Wizard” (PCI Multimedia Audio Device).
- μ Click “Next”/”Other Locations”.
- μ Click “Browse” to locate the audio driver from the CD-ROM. (The path is :\\Audio\\WIN95.)
- μ Click “Ok”.
- μ Click “Finish” to set up the first audio driver.

Step 5: Installing PCMCIA driver

- μ Click “Start”.
- μ Select “Settings”.
- μ Click “Control Panel”/”System”/”Device Manager”.
- μ Select “Other Devices”.

-
- μ Remove “PCI CardBus Bridge”, and then click “OK”.
 - μ Open “Control Panel”.
 - μ Select “Add New Hardware”.
 - μ Click “Add PCMCIA socket”.
 - μ Locate the file “pcmcia.inf” from the disk or CD-ROM.
 - μ Select “PCI-1225 CardBus” from “Texas Instruments”.
 - μ Click ‘Next’/’Next’/’Finish’.
 - μ Before restarting the system, copy the file “PCMCIA.inf” to “C:\windows\inf”, and the file [pci.vxd] [pccard.vxd] [cbss.vxd] to [C:\windows\system].

Note: *make sure whether the files are copied to drive C successfully.*

[C:\windows\system\cbss.vxd] [C:\windows\system\pccard.vxd]
[C:\windows\system\pci.vxd] [C:\windows\inf\pcmcia.inf]

Step 6: Installing Video-in Driver

- μ Boot the system, press Ctrl + Alt + S to enter SCU system.
- μ Select “Components”.
- μ Choose [Enable] for [Video-In Mode].
- μ Under Windows 95, click “Start”.
- μ Select “Run”.
- μ Open the path “D:\video-in\setup.exe”.
- μ Run “setup.exe” to finish the installation.

Step 7: Installing ATI DVD Play Driver (Option)

Note: Make sure that you have already successfully installed the VGA Driver, Audio Driver and DirectX5 beforehand.

- μ Boot the system; press Ctrl+Alt+S keys to enter SCU. Select [Power] menu. Enable [Low Power Saving], or select [Advance CPU control] to set [Full Speed]. (If the clock speed of your CPU is above 366MHz/400MHz or if your DVD runs smoothly, you can skip this step).
- μ From the Windows 95/98 taskbar, click [Start] button; select [Settings], [Control Panel], and then click [System]. Click the tap [Device Manager]; select [CD-ROM], [DVD-ROM], Click the tap [Setting]; and then enable [DMA] check box.
- μ Insert the CD of ATI DVD Play application and the program will automatically run the installation until finished. Otherwise, click [Start] button from the Windows 95/98 taskbar. Select [Run]. Type [D:\Atiplay\setup.exe] and click OK to finish the installation.

Step 8: Using Infrared Wireless Communication

- μ Please refer to the readme file under the FIR directory.

Installing Drivers in Windows NT 4.0

Note:After installing Windows NT4.0, please install Service Pack3 to enhance the function. Download the latest Service Pack3 version from the Microsoft web site.

Step 1: Installing VGA Driver

Preparation: Before ATI VGA installation, firstly insert the CD; click the directory [Directx]. Choose [Dxsetup][R][Reinstall Directx] and press [Ok]. The program will automatically restart the system.

- μ After installing Win98 successfully, enter into the system. Click [Start] at the bottom-left corner on the Windows screen; select [Run]; open the path of [D:\WIN9X\setup.exe] to run VGA driver installation.
- μ When ATI VGA driver has been already included in the system, click [Start], select [Run] and open the path of [atiuinst-clean] and double-click [Ok].

Note: For system ATI VGA included, uninstall the original VGA Driver and then install the driver.

Step 2: Installing Audio Driver

- μ Click "Start".
- μ Select "Settings".
- μ Click "Control Panel".
- μ Select "Multimedia", and then select "Devices".
- μ Click "Add".
- μ Select [Browse] to open the path [D:\audio\NT4.0]
- μ Select "OK".
- μ Restart NT 4.0 system.

Installing Drivers in Windows 98

Step 1: Installing VGA Driver

- μ Click “Start”.
- μ Select “Run”.
- μ Open the path “D:\Video\WIN9X
- μ Run “setup.exe” to finish installation.

Note: When ATI VGA driver has existed in the system, click “Start”, select “Run”, open the path “atiuinstant-clean”, and then double-click “OK” to uninstall the original VGA drivers and then update the VGA drivers.

Step 2: Installing Audio Driver

- μ Click “Start”.
- μ Select “Settings”.
- μ Click “Control Panel”.
- μ Select “system”.
- μ Click “Device Manager”.
- μ Select “Other Devices”.
- μ Remove “PCI Multimedia Audio Device”.
- μ Click “OK”, then restart the system.
- μ After entering into WIN98 system. The program will automatically go to the “Add New Hardware Wizard”. Choose [PCI Multimedia Audio Device].

-
- μ Click “Next”.
 - μ Click “Browse” to specify the location.
 - μ Open the path “D:\audio\Win95”.
 - μ Click “Next”, and then click “Finish” to set up the first audio driver.

Step 3: Installing PCMCIA Driver

- μ Click “Start”/”Settings”/”Control Panel”/”System”.
- μ Remove PCMCIA.
- μ Delete the two sub-directories [Generic CardBus Controller].
- μ Switch to DOS. Copy the file [PCMCIA.inf] to the directory [C:\windows\inf].
- μ Restart Win98 system.

Step 4: Installing Video-in Driver

- μ Boot the system. Press Ctrl+Alt+S to enter the SCU system.
- μ Select “Components”, and enable “Video-In Mode”.
- μ Go to WIN98 system, click “Start”.
- μ Select “Run”.
- μ Open the path “D:\video-in\setup.exe”.
- μ Run “Setup.exe” to finish the installation.

Step 5: Installing ATI DVD Play Driver (Option)

Note: Make sure that you have already successfully installed the VGA Driver, Audio Driver and DirectX5 beforehand.

- μ Boot the system; press Ctrl+Alt+S keys to enter SCU. Select [Power] menu. Enable [Low Power Saving], or select [Advance CPU control] to set [Full Speed]. (If the clock speed of your CPU is above 366MHz/400MHz or if your DVD runs smoothly, you can skip this step).
- μ From the Windows 95/98 taskbar, click [Start] button; select [Settings], [Control Panel], and then click [System]. Click the tap [Device Manager]; select [CD-ROM], [DVD-ROM], Click the tap [Setting]; and then enable [DMA] check box.
- μ Insert the CD of ATI DVD Play application and the program will automatically run the installation until finished. Otherwise, click [Start] button from the Windows 95/98 taskbar. Select [Run]. Type [D:\Atiplay\setup.exe] and click OK to finish the installation.

Appendix A: Specifications

The following are the features and specifications of the notebook computer:



Processor

- Intel Celeron-300A, Celeron-333, Celeron-366, Celeron-400, Celeron 433.
- PPGA Package (370-pin socket)



Memory

- Supports 3.3V EDO/SDRAM SODIMM
- Expandable memory up to 256MB
- Two sockets for 8/16/32/64/128MB 144-pin SODIMM RAM modules (optional)



System BIOS

- 256KB Flash ROM
- SystemSoft BIOS with smart battery
- Plug and Play 1.0a



Display

- 13.3"/14.1" TFT XGA LCD panel
- 4MB display memory SGRAM type (100MHz)
- Tri-view™ for triple display, TV, CRT & LCD.
- AGP 2X
- Complete 64-bit hardware 2D/3D Accelerator Graphics Engine

-
- Motion Compensation
 - High quality TV-out (6-Line buffer quality) with Macro Vision® V7.01 anti-copy technology.
 - Support TFT panel resolution up to 1024X768X16M.
 - Support CRT resolution up to 1280X768X16M
 - Support TV resolution 1024X768.
 - Support ZV port.
 - Support external Video Input.



Storage

- 3.5" Floppy disk drive
- 2.5" hard disk drive (12.7 or 17mm high)
- DVD-ROM/CD-ROM (24X speed)
- Support Master mode IDE, PIO mode 4 and ATA-33 (Ultra DMA33)



Audio

- Sound-Blaster Pro™ version 3.01 compatible
- AC 97 compliant
- 3D stereo enhancement sound system
- IIS interface for external ZV port
- Built-in microphone
- Built-in Line-in
- 2 built-in speakers
- Downloadable Wavetable
- High-quality FM music synthesizer 16-bit stereo sound system



PC Card Sockets

- Support CardBus (PC Card95)
- Support Zoom Video Port (Socket A)
- Two Type II PC cards or one Type III PC card



Input/Output

- Built-in trackpad (PS/2)
- Dual USB ports
- One Fast Infrared(FIR)
- One S-video jack for TV output
- One 176-pin expansion port for Port Replicator
- One RCA jack for video input
- One External monitor (CRT) port
- One Serial port
- One Parallel port(LPT1), support ECP/EPP 1.7 and 1.9
- One PS/2 type ports
- One Speaker-out jack
- One Line-in jack
- One Microphone-in jack
- One RJ-11 jack for PCI PnP Modem Accessory or RJ-45 for ISDN Accessory (Option)
- DC-in jack



Infrared Wireless Communication

- IrDA 1.1
- FIR
- ASKIR



Power Management

- Support APM v1.2
- Soft Off
- Support suspend to disk
- Battery low suspend
- Resume from alarm time
- Resume from modem ring (COM Port only)



Power

- AC input: 100~240V, 47~63Hz
- Support dual pack, removable Lithium-Ion Battery (48.6 watt) or Ni-MH Battery (45.6 watt)



Size & Weight

- 316mm(w)x256mm(d)x47mm(h)
- 3.6kg (with Lithium-Ion battery)



Keyboard

- A4-Size Win95 keyboard included numeric keypad.

Appendix B: I/O Port Pin Assignments

Parallel Port

Pin	Description	Pin	Description
1	PSTB#	2	PD0
3	PD1	4	PD2
5	PD3	6	PD4
7	PD5	8	PD6
9	PD7	10	PACK#
11	PBUSY	12	PPE
13	PSLCT	14	PATFD#
15	PPERR#	16	PINIT#
17	PSLIN#	18	Ground
19	Ground	20	Ground
21	Ground	22	Ground
23	Ground	24	Ground
25	Ground		

RS-232C Serial Port

Pin	Description
1	DCDA (DATA Carrier Detect)
2	RXDA (Received Data)
3	TXDA (Transmitted Data)
4	DTRA (Data Terminal Ready)
5	GND (Signal Ground)
6	DSRA (Data Set Ready)
7	RTSA (Request To Send)
8	CTSA (Clear To Send)
9	RIA (Ring Indicator)

Appendix B--I/O Port Pin Assignments

External Monitor Port

Pin	Description				
1	BRED	6	GND	11	N.C
2	BGREEN	7	GND	12	DDCDA
3	BBLUE	8	GND	13	DHSYNC
4	N.C	9	N.C	14	DVSYNC
5	GND	10	GND	15	DDCLK

PS/2 Type Port

Pin	Description
1	EKDA
2	EMCLK
3	GND
4	VCC
5	EKCLK
6	EMDA

S-Video Jack

Pin	Description
1	GND
2	COMP
3	XLUMA
4	XCRMA

USB Port

Port A:

Pin	Description
1	USB VCCA
2	USBP0-
3	USBP0+
4	GND

Port B:

Pin	Description
1	USB VCCB
2	USBP1-
3	USBP1+
4	GND

PC Card Sockets

Socket A:

Pin	Description	Pin	Description
1	GND	35	GND
2	A CD3	36	A CD1#
3	A CD4	37	A CD11
4	A CD5	38	A CD12
5	A CD6	39	A CD13
6	A CD7	40	A CD14
7	A CE1#	41	A CD15
8	A CA10	42	A CE2#
9	A OE#	43	A VS1
10	A CA11	44	A IORD#
11	A CA9	45	A IOWR#
12	A CA8	46	A CA17
13	A CA13	47	A CA18
14	A CA14	48	A CA19
15	A WE#	49	A CA20
16	A RDYBY#	50	A CA21
17	A VCC C	51	A VCC C
18	A VPP	52	A VPP
19	A CA16	53	A CA22
20	A CA15	54	A CA23
21	A CA12	55	A CA24
22	A CA7	56	A CA25
23	A CA6	57	A VS2
24	A CA5	58	A RESET
25	A CA4	59	A WAIT#
26	A CA3	60	A INPACK
27	A CA2	61	A REG#

Appendix B--I/O Port Pin Assignments

28	A CA1	62	A BVD2#
29	A CA0	63	A BVD1#
30	A CD0	64	A CD8
31	A CD1	65	A CD9
32	A CD2	66	A CD10
33	A WP#	67	A CD2#
34	GND	68	GND

Socket B:

Pin	Description	Pin	Description
1	GND	35	GND
2	B CD3	36	B CD1#
3	B CD4	37	B CD11
4	B CD5	38	B CD12
5	B CD6	39	B CD13
6	B CD7	40	B CD14
7	B CE1#	41	B CD15
8	B CA10	42	B CE2#
9	B OE#	43	B VS1
10	B CA11	44	B IORD#
11	B CA9	45	B IOWR#
12	B CA8	46	B CA17
13	B CA13	47	B CA18
14	B CA14	48	B CA19
15	B WE#	49	B CA20
16	B RDYBY#	50	B CA21
17	B VCC C	51	B VCC C
18	B VPP	52	B VPP
19	B CA16	53	B CA22
20	B CA15	54	B CA23
21	B CA12	55	B CA24
22	B CA7	56	B CA25
23	B CA6	57	B VS2
24	B CA5	58	B RESET
25	B CA4	59	B WAIT#
26	B CA3	60	B INPACK

Appendix B--I/O Port Pin Assignments

27	B CA2	61	B REG#
28	B CA1	62	B BVD2#
29	B CA0	63	B BVD1#
30	B CD0	64	B CD8
31	B CD1	65	B CD9
32	B CD2	66	B CD10
33	B WP#	67	B CD2#
34	GND	68	GND

