

## **Notice**

The company reserves the right to make any updates, revisions or changes to the information contained herein as and when deemed necessary. The company is under no obligation to notify any purchaser or end-user of such actions in advance or afterwards.

1998

## **Trademarks**

IBM PC, OS/2, PS/2, EGA, and VGA are registered trademarks of International Business Machines Corporation.

Intel, Pentium are trademarks of Intel Corporation.

MS-DOS, Microsoft Windows, Windows NT and Microsoft Mouse are registered trademarks of Microsoft Corporation.

Sound Blaster Pro is a trademark of Creative Labs, Inc.

SystemSoft is a registered trademark of SystemSoft Corp.

Other brand and product names are trademarks of their respective companies.

## Warranty Provisions

Keep the product's bar code legible to protect your right for warranty services.

The manufacturer warrants this personal computer to be in working order for a period of one year from the date of shipment. If this product fails within the one year warranty period the manufacturer will, at its option, repair or replace the product at no charge except as set forth below.

Warranty service will be furnished on an exchange basis. The manufacturer may repair or replace your product with a new or reconditioned one. Any replaced components or parts become the property of the manufacturer.

No warranty is expressed or implied for products damaged by accident, abuse, misuse, acts of god, or un-authorized modification. No warranties apply after the one year warranty period.

To obtain warranty service described herein, deliver the product along with proof of purchase date, to any of the manufacturer's authorized distributors during the warranty period. The owner agrees to insure the product and assume the risk of damage or loss in transit, to pay in advance all shipping charges, and to use the original shipping container (or the equivalent).

The manufacturer is not liable to any purchaser or end-user for any damages including, but not limited to, lost revenue, lost wages, lost savings, or any other incidental or consequential damages arising from the purchase, use, or inability to use this product.

# Important Safety Instructions

Please read and follow these important instructions.

1. Follow all warnings and instructions marked on this product.
2. Unplug this product from the wall outlet before cleaning it or connecting peripheral devices.
3. Use a damp cloth with mild soap to clean this product. Do not apply cleaner directly to the unit. Do not use volatile or abrasive cleaners on this product.
4. Do not place this product on an unstable surface where it may fall.
5. Do not block or cover the system's ventilation openings. Also, never place this product near or over a radiator or heat register, or in a built-in installation unless adequate ventilation is provided.
6. Operate this product in accordance with its rated power specifications. If you are unsure of your local power specifications, consult your dealer or local power company.
7. This product is equipped with a 3-wire grounding type plug. This is an important safety feature; do not defeat its purpose. If you do not have access to such power, have a qualified electrician install a proper outlet.
8. Do not allow anything to rest on the power cord. Do not locate this product where persons will likely walk on the cord.
9. If an extension cord is used with this product, make sure the total current drawn by the products plugged into the extension cord do not exceed the extension cord or outlet power ratings.

10. Do not allow foreign matter to enter the system.
11. Do not attempt to service this product yourself. Opening or removing covers may expose dangerous voltage points. Refer all repair work to qualified service personnel.
12. Unplug this product from the wall outlet, do not operate it, and immediately seek proper servicing if:
  - The power cord or plug is damaged or frayed.
  - Liquid or foreign matter has entered this product.
  - This product has been exposed to rain or water.
  - This product has been dropped or damaged.
  - This product exhibits a distinct change in performance, indicating a need for service.
13. Do not use any battery pack other than the one specifically designed for this system. Batteries may explode or leak if exposed to fire or improperly handled or guarded. Refer battery replacement to your dealer or qualified service personnel.
14. Only use UL listed/CSA certified, type SVT/SJT power cords rated 6A 250V minimum (VDE approved or equivalent). It should be a detachable type with a minimum length of 6 feet.
15. Adjust only those controls that are covered by these operating instructions. Improper adjustment of other controls may result in serious damage to the system and are not covered by the warranty.

## Conventions

This manual uses the following conventions to describe, identify, and highlight terms and operating procedures.

### Text Conventions

Text in boldface contains messages that are important for safe operation. Please read.

Characters in boldface represent specific items or keys, e.g. **CardBus**, **Fn** key.

File names are presented in bold capitals, e.g. **A:\>0VMAKFIL /Pn**.

### Abbreviations

For the purpose of clarity, abbreviations are enclosed in parentheses following their definition; for example, Enhanced Parallel Port (EPP) mode.

### Icons

Icons identify ports and jacks of the Notebook computer. The system status indicators are also identified with their relative icons.

### Keys

Keys appear in boldface. A plus sign (+) between two keys indicates that they should be pressed simultaneously.

### Messages

**Note:** A note is an advice that helps you make best use of your Notebook computer. Please read.

## Ergonomics

Developing good work habits are important if you need to work in front of the computer for long periods of time. Improper work habits can result in discomfort or serious injury from repetitive strain to your hands, wrists or other joints. The following are some tips to reduce the strain:



- Adjust the height of the chair and/or desk so that the keyboard is at or slightly below the level of your elbow. Keep your forearms, wrists, and hands in a relaxed position.
- Your knees should be slightly higher than your hips. Place your feet flat on the floor or on a footrest if necessary.
- Use a chair with a back and adjust it to support your lower back comfortably.
- Sit straight so that your knees, hips and elbows form approximately 90° angles when you are working.

## Lighting

Proper lighting and comfortable display viewing angle can reduce eye strain and muscle fatigue in your neck and shoulders.

- Position the display to avoid glare or reflections from overhead lighting or outside sources of light.
- Keep the display screen clean and set the brightness and contrast to levels that allow you to see the screen clearly.
- Position the display directly in front of you at a comfortable viewing distance.
- Adjust the display viewing angle to find the best position.

In addition, continuous concentration on computing work can result in discomfort and injury. Remember to:

- Alter your posture frequently.
- Stretch and exercise your body several times a day.
- Take periodic breaks when you work at the computer for long periods of time. Frequent and short breaks are of greater benefit than fewer and longer breaks.

# Table of Contents

## Chapter 1: Getting Started

Unpacking .....	1-2
Operating Environment .....	1-3
Quick Start-up .....	1-4
Powering the System .....	1-4
AC Power Adapter .....	1-4
Battery Pack.....	1-5
Inserting .....	1-5
Removing.....	1-5
Recharging by AC Power.....	1-6
Proper Handling of the Battery Pack.....	1-6
Opening the LCD Cover .....	1-7
LED Indicators on the LCD Cover .....	1-8
Top-Front View.....	1-9
LCD Panel.....	1-9
Stereo Speakers .....	1-9
Trackpad and Buttons .....	1-9
Keyboard.....	1-9
Microphone .....	1-9
System Status LED Indicators.....	1-10
Power Button.....	1-10
Rear View.....	1-12
AC-in Socket .....	1-12
Security Connector.....	1-12
Parallel Port.....	1-12
S-video Jack.....	1-12
RCA Jack .....	1-12
Expansion Port.....	1-12
Dual USB Ports .....	1-12
Serial Port .....	1-12
External Monitor (CRT) Port.....	1-13
Dual PS/2 Type Ports.....	1-13

Right-side View .....	1-14
PC Card Sockets.....	1-14
2.5" Hard Disk Drive.....	1-14
3.5" Floppy Disk Drive.....	1-14
Speaker-out Jack .....	1-14
Line-in Jack .....	1-14
Microphone-in Jack .....	1-14
Ventilation .....	1-15
Right-side Stand.....	1-15
Left-side View.....	1-16
5.25" CD-ROM Drive .....	1-16
Infrared.....	1-16
Left-side Stand .....	1-16

## **Chapter 2: Operation**

Upgrading Processor Module.....	2-2
Replacing Processor Module .....	2-3
Setting DIP Switch .....	2-4
Accessing DIP Switch (SW1) .....	2-4
Expanding Memory .....	2-6
Accessing the Memory Sockets .....	2-7
Installing Memory Module .....	2-8
Removing Memory Module .....	2-9
Using Hard Disk Drive .....	2-10
Removing.....	2-10
Inserting .....	2-10
Replacing Hard Disk Drive .....	2-11
Using Floppy Disk Drive .....	2-12
Inserting/Removing Diskettes.....	2-12
Replacing Floppy Disk Drive .....	2-13
Using CD-ROM .....	2-14
Removing CD-ROM Module.....	2-15
Loading Compact Discs .....	2-16
Handling of Compact Discs .....	2-17
Using PC Card Sockets.....	2-18
Inserting PC Cards.....	2-19
Removing PC Cards .....	2-19

Using Hot Keys .....	2-20
Using Numeric Keypad.....	2-22
Windows 95 Special Keys .....	2-23
Application Key .....	2-23
Windows Key .....	2-23
TV-Output.....	2-24
LCD Panel.....	2-25
Using Power Management.....	2-26
Advanced Power Management (APM 1.2) .....	2-26
Advanced Configuration and Power Interface (ACPI) .....	2-26
Global Standby.....	2-27
Suspend and Resume.....	2-27
Powered On Suspend (POS) .....	2-28
Resume from POS Mode .....	2-28
Suspend To RAM (STR) .....	2-28
Resume from STR Mode .....	2-28
Suspend To Disk (STD) .....	2-29
Resume from STD Mode .....	2-29

### **Chapter 3: BIOS Utilities**

Power On Self Test (POST) .....	3-2
POST Message: Normal Operation.....	3-2
POST Message: Error Detected.....	3-3
System Configuration Utility .....	3-4
Information in the System Configuration Utility.....	3-4
Initiating the System Configuration Utility.....	3-5
Working with the Menu Bar of the SCU.....	3-6
Working with the Pull-down Menu of the SCU.....	3-7
Features of the System Configuration Utility .....	3-8
Startup Menu.....	3-8
Memory Menu .....	3-10
Disks Menu .....	3-11
Components Menu.....	3-13
Power Menu.....	3-16
Exit Menu .....	3-19

## **Chapter 4: Peripheral Devices**

Attaching a Security Lock.....	4-2
Attaching a Parallel Printer.....	4-3
Attaching a TV Set.....	4-4
Attaching a Video Input Device.....	4-5
Attaching a USB-compatible Device.....	4-6
Attaching a Serial Mouse.....	4-7
Attaching an External Monitor (CRT).....	4-8
Attaching a PS/2 Keyboard or Mouse.....	4-9

<b>Appendix A: Specifications.....</b>	<b>A-1</b>
--	------------

<b>Appendix B: I/O Port Pin Assignments.....</b>	<b>B-1</b>
--	------------

## **Index**


# Chapter 1: Getting Started

This chapter provides you with the short instruction of notebook system that will help you to have the basic understanding about your notebook.

Unpacking .....	1-2
Operating Environment .....	1-3
Powering the System .....	1-4
AC Power Adapter .....	1-4
Battery Pack.....	1-5
Opening the LCD Cover.....	1-7
Top-Front View.....	1-9
Rear View.....	1-12
Right-side View .....	1-14
Left-side View.....	1-16

## ***Unpacking***

Carefully unpack the Notebook Computer and the included accessories (Figure 1-1). If there is any discrepancy or problem, contact your dealer immediately. Be sure to save the packing materials in the event that the notebook needs to be shipped at some point in the future.

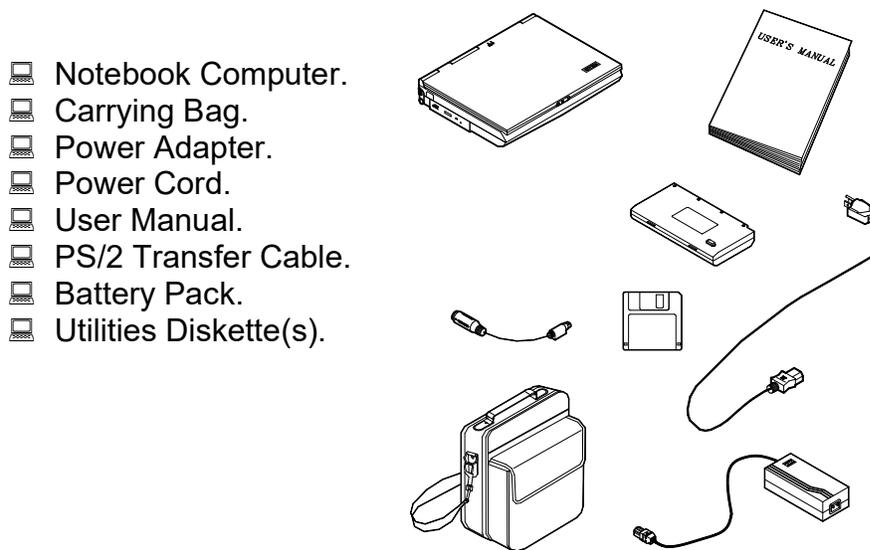

**Figure 1-1**

## Operating Environment

As with any other precision electronic equipment, proper care and operation of your notebook computer<sup>1</sup> will prolong the use period. Make sure the computer is not:

-  Exposed to excessively heat or direct sunlight.
-  Subjected to shock or vibration.
-  Exposed to strong magnetic fields.
-  Left in a place where foreign matter or moisture may enter the system.

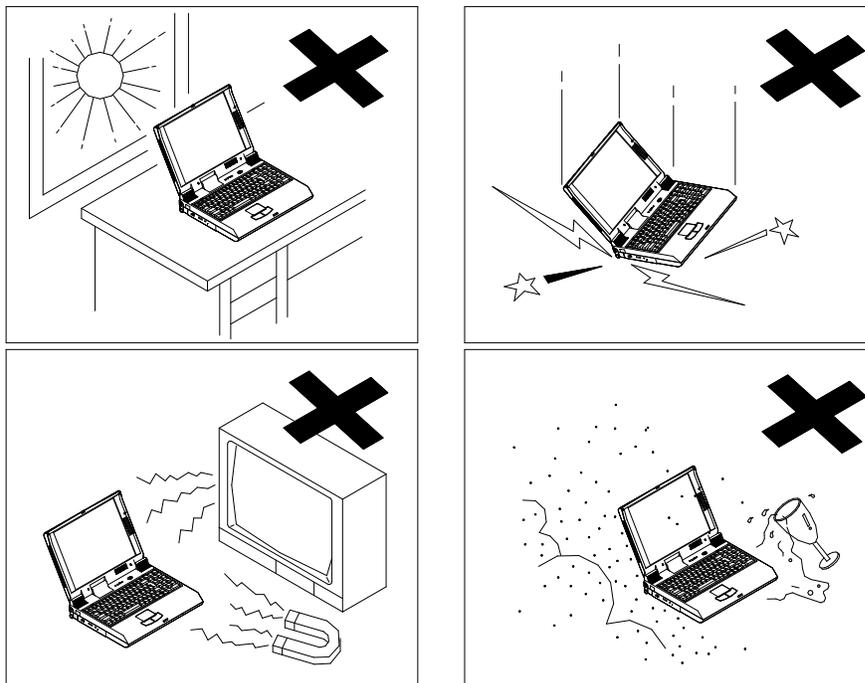


Figure 1-2


## **Quick Start-up**

### **Powering the System**

#### **AC Power Adapter**

Use only the power adapter that comes with your Notebook Computer. System operation with an incorrect power adapter will cause damage to the Notebook and its components.

1. Plug the power adapter to the AC-in socket on the rear panel of the Notebook.
2. Connect the power cord to the power adapter.
3. Plug the AC power cord into a properly grounded outlet (Figure 1-3).
4. Refer to Chapter 1, System Status Indication for more information on system power status.

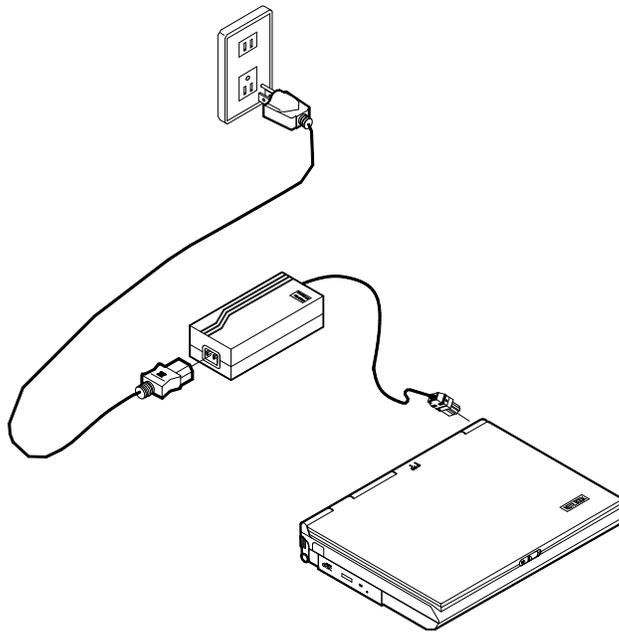

**Figure 1-3**

## Battery Pack

Power for continuous portable operation of the Notebook is provided by a battery pack. When using the battery no external power source is required. However, the actual operating time will be determined by the application used and the configuration set.

### Inserting

1. Turn the Notebook over.
2. Position the battery pack at a slight angle and firmly fit it into the Notebook.
3. Install the four screws that fasten the battery pack (Figure 1-4).

### Removing

1. Turn the Notebook over.
2. Remove the four screws that fasten the battery pack.
3. Carefully lift the battery pack from the Notebook.

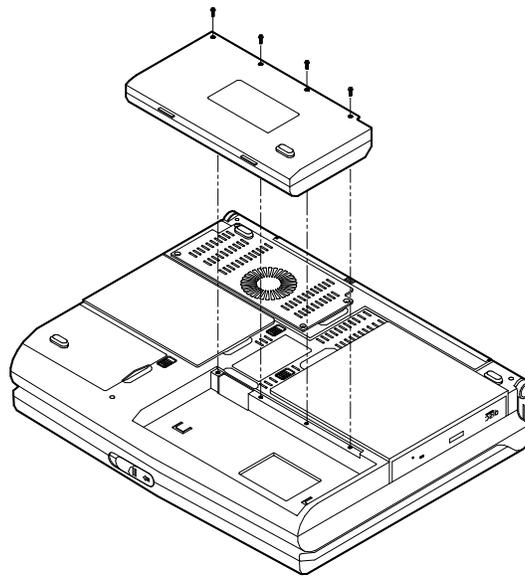


Figure 1-4

## **Recharging by AC Power**

The system's battery pack will recharge whenever the system is plugged into the AC power supply, regardless of whether the system is being operated or not.

- You may connect the AC power adapter to the Notebook Computer at any time to begin recharging the system's battery pack. You do not need to turn off the system's power.
- Hours may be needed to recharge the battery pack.
- Please refer to Chapter 1, System Status Indication for more information concerning battery charge status.

## **Proper Handling of the Battery Pack**

- Do not attempt to disassemble the battery under any circumstances.
- The battery may explode if exposed to fire or high temperatures.
- Avoid short circuiting the battery by preventing contact between the metal terminals (+, -).

## Opening the LCD Cover

1. To release the top cover slide the latch to the right (Figure 1-5).
2. Lift the top cover to reveal the LCD panel and keyboard (Figure 1-6).
3. Adjust the LCD panel to a comfortable viewing angle.
4. Press the power button to turn the system on or off (refer to Chapter 1, Top-Front View for the information of the power button).

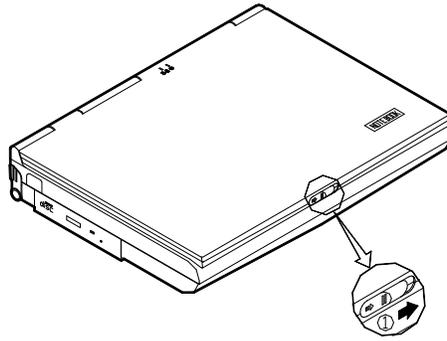


Figure 1-5

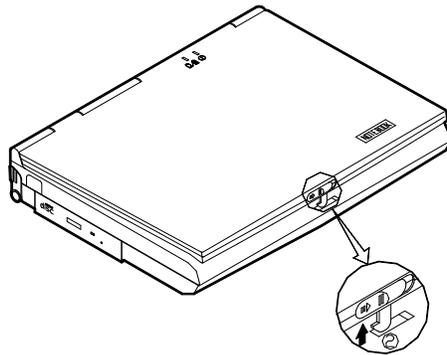


Figure 1-6

## LED Indicators on the LCD Cover

Icon	Color	Description
ⓘ	Green	Battery power is used with system turned on.
	Red	AC power is used with system turned on or off.
🔋	Green	Battery is fully charged.
	Red	Battery is being charged.
	Blinking Red	Battery power is critically low.

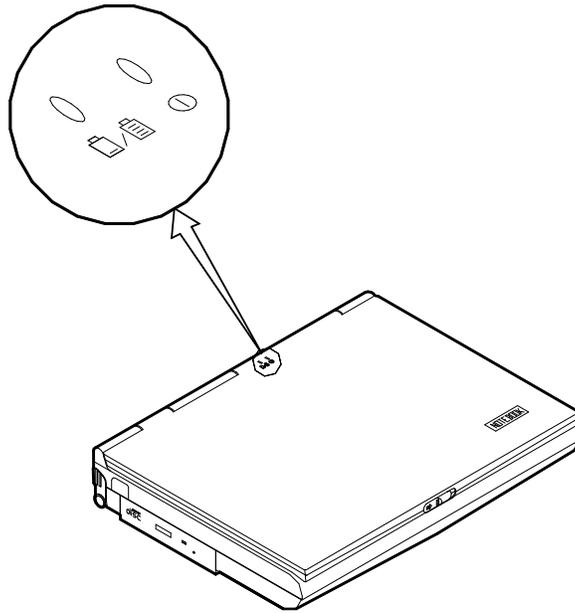


Figure 1-7

## ***Top-Front View***

Refer to Figure 1-8 for their locations.

### **LCD Panel**

The Notebook provides you with a large LCD panel. Depending upon the model you have purchased, it can either be a 15.1"/14.1"/13.3" XGA (1024x768 pixels) compatible, using TFT technology or a 13.8" XGA (1024x768 pixels) compatible, using DSTN technology. The LCD panel is driven by a PCI local bus video controller with 4MB video memory.

### **Stereo Speakers**

Two built-in speakers provide clear stereo sound.

### **Trackpad and Buttons**

The pointing device features a sensitive glide pad for precise movements. It functions like a two-button mouse does. The right trackpad button is equivalent to the right mouse button; the left trackpad button is equivalent to the left mouse button.

### **Keyboard**

The Notebook utilizes a 102-key Windows 95 keyboard that is integrated with the numeric keypad. It is detachable for various language versions. You may refer to Chapter 2: Operation for more information.



### **Microphone**

This is the built-in microphone.

## System Status LED Indicators

The LED indicators display the system's operation status.

Icon	Color	Description
	Green	Battery power is used with system turned on.
	Red	AC power is used with system turned on or off.
	Green	Battery is fully charged.
	Red	Battery is being charged.
	Blinking Red	Battery power is critically low.
	Green	The IDE device is being accessed.
	Green	The system has entered the configured suspend mode (either POS or STR mode).

## Power Button

Icon	Description
	Use this button to turn the system on or off.
	After proper configuration under SCU, this button can be used as suspend/resume hot button (refer to Chapter 3: BIOS Utilities, Power Menu for more information).

**Note:** After turning off the system, wait for a few seconds to power it on again.

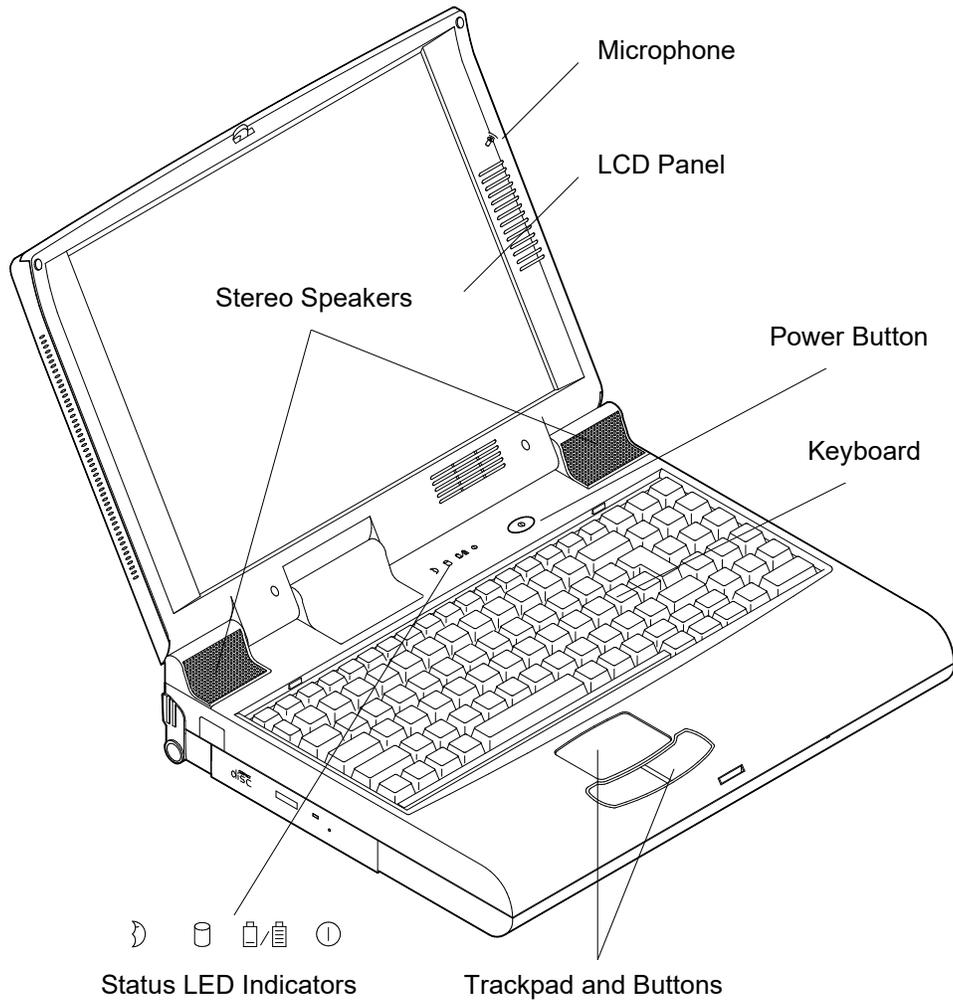


Figure 1-8

## Rear View

### **AC-in Socket**

Plug the AC adapter into this socket for power supply. To disconnect, pull the plug (not the cord) directly back.

### **Security Connector**

The Security Connector is used to protect your Notebook from being stolen. Wrap the steel cable around your desk. Next, insert the locking device into this security connector.

### **Parallel Port**

This parallel port supports EPP (Enhanced Parallel Port) and ECP (Extended Capabilities Port) modes.

### **S-video Jack**

Use this jack to transmit video signal to a TV set. You may need to select the video standard (NTSC/PAL) for video display (please refer to Chapter 3, Components Menu for more information).

### **RCA Jack**

This jack accepts analog composite signals from external video devices, e.g. camera, CCD.

### **Expansion Port**

This port is used to connect the proprietary Port Replicator.

### **Dual USB Ports**

The dual Universal Serial Bus (USB) ports simplify the expansion capability for peripheral devices.

### **Serial Port**

This port is UART 16C550 compatible. It features a 9-pin connector for the addition of an external mouse for example.



**External Monitor (CRT) Port**

This port is used for transmission of the display to an external monitor. Simultaneous display with the LCD panel is available.



**Dual PS/2 Type Ports**

A PS/2 type mouse and keyboard may be connected to the system using these ports. However, you cannot connect the same type of PS/2 devices to both ports simultaneously.



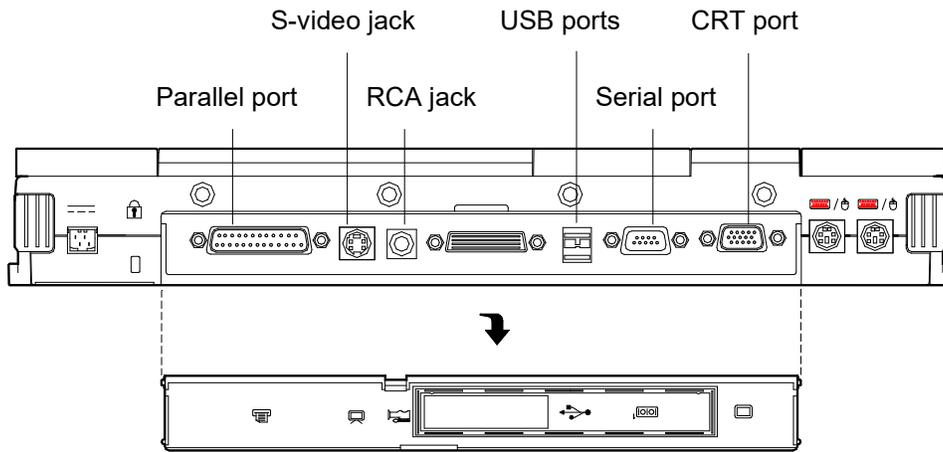


Figure 1-9

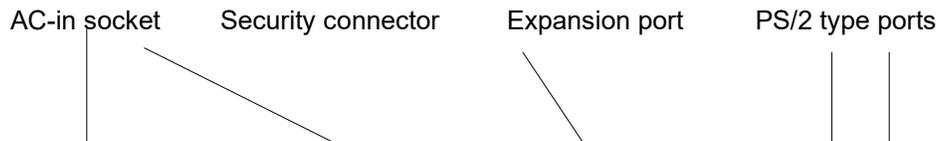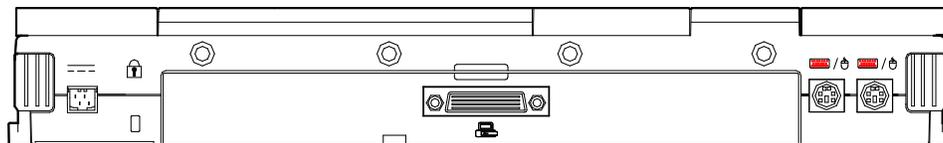

**Figure 1-10**

## ***Right-side View***

### **PC Card Sockets**

One Type III or two Type II PC cards may be used. Both sockets will expand the system capabilities when a PC card is inserted. To eject the PC card, press the appropriate eject button (Figure 2-15).

### **2.5" Hard Disk Drive**

The 2.5" hard disk drive is removable. It accepts any 2.5" IDE hard disk drive with a height of 12.7mm or less. Refer to Chapter 2: Operation, for more information.

### **3.5" Floppy Disk Drive**

The Notebook comes standard with a 1.44MB floppy drive installed. Press the button on its top-right side to eject the diskette. The floppy disk module can be replaced with additional drive units, such as a secondary 2.5"/3.0" hard disk drive or Zip drive (Refer to Chapter 2: Operation, for more information).



### **Speaker-out Jack**

Headphone and speakers can be attached to the system through this jack.



### **Line-in Jack**

External audio source can be fed into the Notebook through this jack.



### **Microphone-in Jack**

Use this jack to connect a microphone to the system.

## Ventilation

The Notebook provides ventilation to dissipate the system's operating heat. Do not block or obstruct it during operation.

## Right-side Stand

Move this stand (together with the left one) to adjust the typing angle. **If a high speed CPU is installed on the system, erecting the stands on both sides will be necessary for heat dissipation during operation** (Figure 1-12).

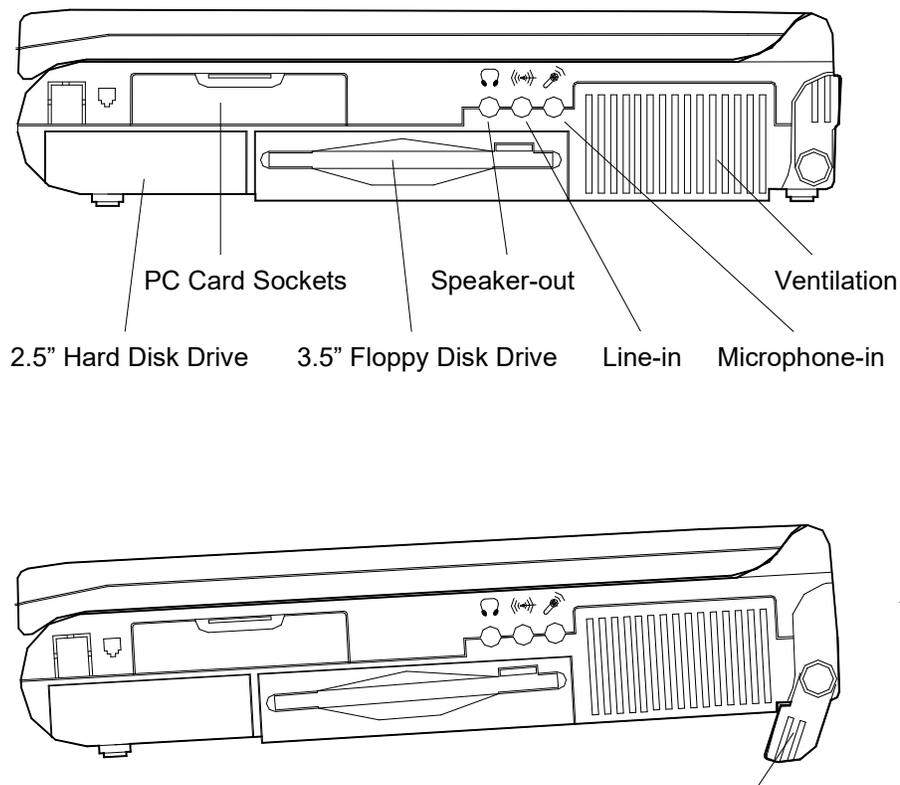


Figure 1-12



## ***Left-side View***

### **5.25" CD-ROM Drive**


The 5.25" IDE CD-ROM module is designed to be removable. The eject button is located in the middle of the front cover of the CD-ROM drive. Pressing it will release the CD tray.

### **Infrared**


The system adopts infrared technology as the interface for simple, fast and convenient data exchange from the Notebook to an infrared-compatible device. It implements IrDA (HPSIR), Amplitude Shifted Keyed IR (ASKIR), and Fast IR (FIR). No object should be blocking the line of sight between the Notebook and the infrared-equipped device. For further information refer to the manual of the wireless device you wish to connect on how to use the point-and-shoot operation.

### **Left-side Stand**

Move this stand (together with the right one) to adjust the typing angle. **If a high speed CPU is installed on the system, erecting the stands on both sides will be necessary for heat dissipation during operation** (Figure 1-14).

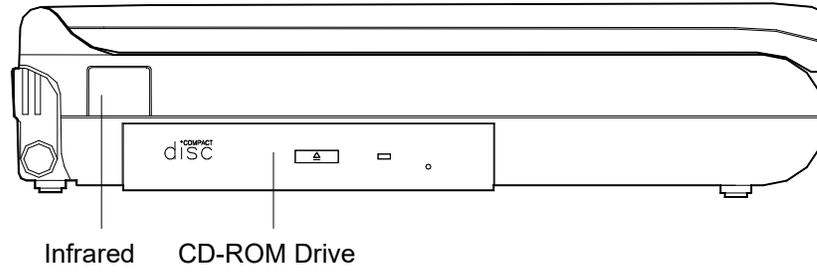

**Figure 1-13**

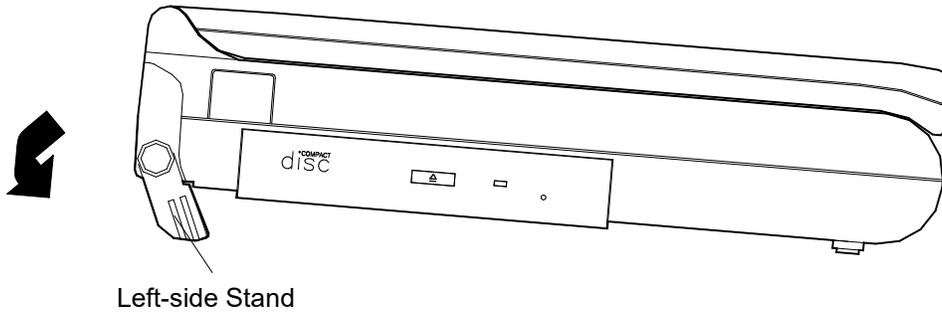

**Figure 1-14**



## Chapter 2: Operation

The Notebook has many advanced features to help you with your computing work. This chapter describes each of the Notebook's hardware features and shows you how to use them.

**Before you begin working with any internal components of the Notebook, remove the battery and disconnect the AC power adapter.**


**Make sure that you wear an anti-static wrist strap to ground yourself before working with any internal components of the Notebook. Static electricity may damage components beyond repair.**

Upgrading Processor Module .....	2-2
Setting DIP Switch .....	2-4
Expanding Memory .....	2-6
Using Hard Disk Drive .....	2-10
Using Floppy Disk Drive .....	2-12
Using CD-ROM .....	2-14
Using PC Card Sockets.....	2-18
Using Hot Keys .....	2-20
Using Numeric Keypad.....	2-22
TV-Output.....	2-24
LCD Panel.....	2-25
Using Power Management.....	2-26

## ***Upgrading Processor Module***


The Notebook Computer features the structure of Intel's Mobile Module (IMM). The Processor Module incorporates an Intel Pentium Mobile processor, secondary cache, and the Intel PCIset "Northbridge" system controller, voltage regulator, and thermal sensor on a single printed circuit board.

The Processor Module connects to the mainboard through two board-to-board connectors. This design facilitates users to easily upgrade their system by simply replacing the Processor Module.

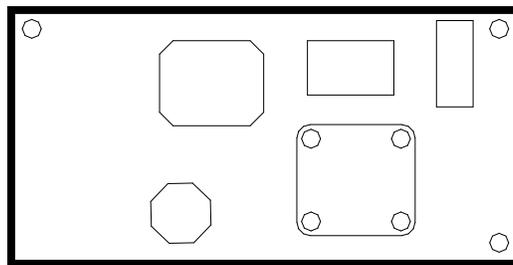

**View from Top**

**Two Connectors**

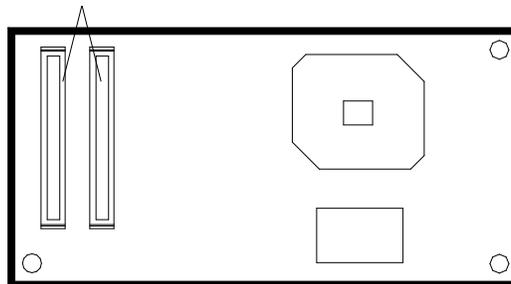

**View from Bottom**

**Figure 2-1**

## Replacing Processor Module

1. **Remove all power sources** (AC power and battery).
2. Turn the Notebook over.
3. Remove the CPU cover.
4. Remove the screws that fasten the heat sink mounted on the Processor Module.
5. Carefully detach the Processor Module from the mainboard (Figure 2-2).

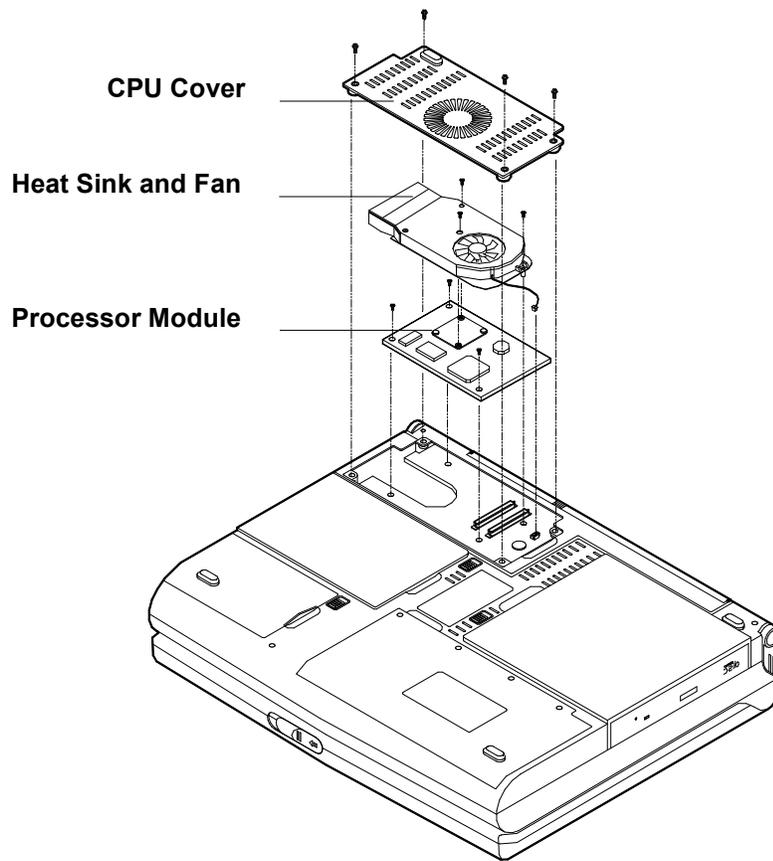


Figure 2-2

## Setting DIP Switch

Remove the keyboard to reveal the system's mainboard. Locate the DIP Switch (SW1) to set the correct configuration for the following purpose:

-  Flash ROM BIOS update

In order to keep up with the latest system BIOS, your Notebook may be upgraded. Consult your dealer for further information. The DIP Switch needed to be set in the **On** position when updating the existing system BIOS. The DIP Switches should be reset to the **Off** position after BIOS updating is complete.

DIP Switch (SW1)		Purpose
<b>SW1-1</b>	<b>SW1-2</b>	<b>Flash ROM BIOS</b>
Off	Off	Existing BIOS
On	On	Updating BIOS

### Accessing DIP Switch (SW1)

1. Turn the system power off.
2. Press the two keyboard latches so that the keyboard can be elevated from its normal position (Figure 2-3).
3. Carefully lift the keyboard assembly out so that the mainboard is exposed. Locate the DIP Switch SW1 to set the configuration (Figure 2-4).

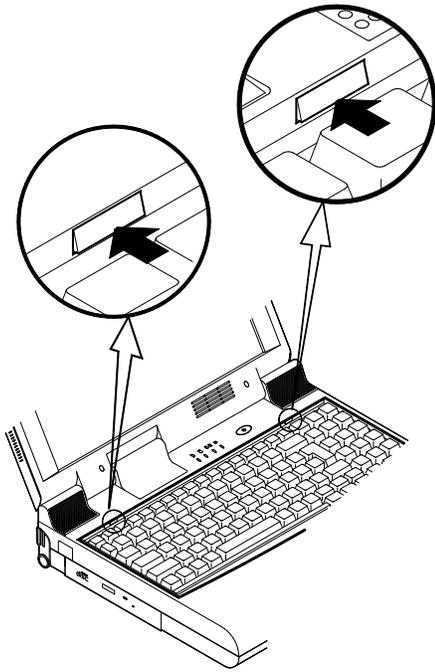


Figure 2-3

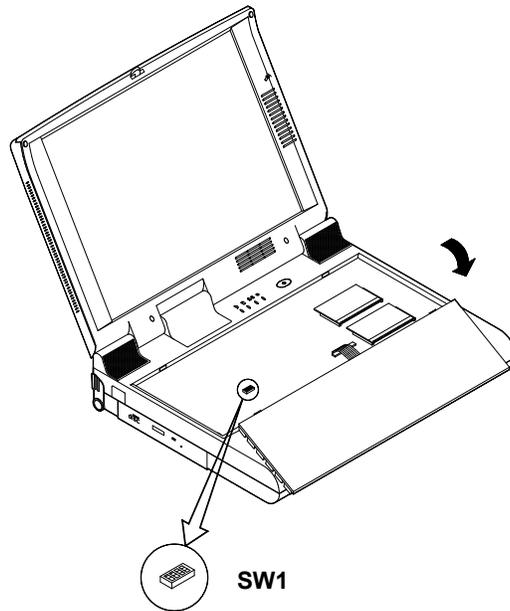


Figure 2-4

## ***Expanding Memory***

The system has two memory sockets for different RAM modules to expand the memory up to 128MB. These RAM modules are of a 144-pin SODIMM (Small Outline Dual In-line Memory Module) type. The Notebook supports Fast Page Mode, EDO, and SDRAM operation. With the following memory configurations the total memory size will be automatically detected by the POST routines:

<b>Bank 0 (64-bit)</b>	<b>Bank 1 (64-bit)</b>	<b>Power</b>	<b>Speed</b>	<b>Total Size</b>
(1Mx16)x4	None	3.3V	60ns	8MB
(1Mx16)x4	(1Mx16)x4			16MB
(1Mx16)x8	None			16MB
(2Mx8)x8	None			16MB
(1Mx16)x8	(1Mx16)x4			24MB
(4Mx16)x4	None			32MB
(2Mx8)x8	(2Mx8)x8			32MB
(1Mx16)x8	(1Mx16)x8			32MB
(4Mx16)x4	(4Mx16)x4			64MB
(4Mx16)x8	None			64MB
(8Mx8)x8	None			64MB
(4Mx16)x8	(4Mx16)x4			96MB
(4Mx16)x8	(4Mx16)x8			128MB
(8Mx8)x8	(8Mx8)x8			128MB

## Accessing the Memory Sockets

1. Turn the system power off.
2. Press the two keyboard latches so that the keyboard can be elevated from its normal position (Figure 2-3).
3. Carefully lift the keyboard assembly out so that the mainboard is exposed. Locate the memory sockets (Figure 2-5).


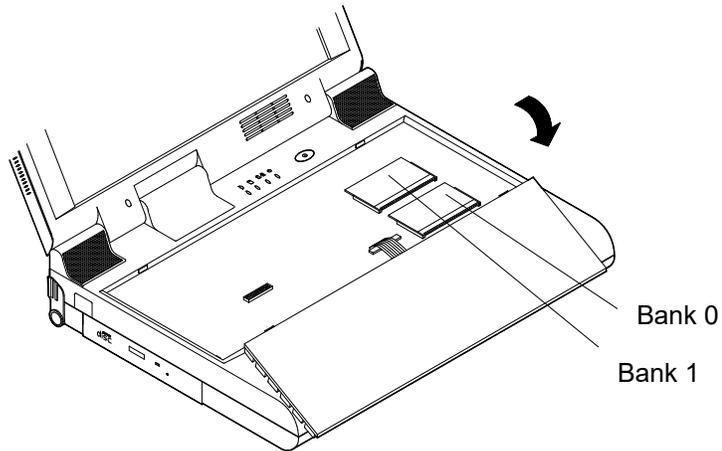


Figure 2-5

## Installing Memory Module

Follow the steps below to install the memory module:

1. Turn the system power off.
2. Press the two keyboard latches so that the keyboard can be elevated from its normal position (Figure 2-3).
3. Carefully lift the keyboard assembly out so that the mainboard is exposed. Locate the memory sockets (Figure 2-5).
4. Position the memory module at a slight angle and fit its connectors into the socket firmly. Push the module down and ensure it locks into place (Figure 2-6).
5. Reinstall the keyboard assembly.

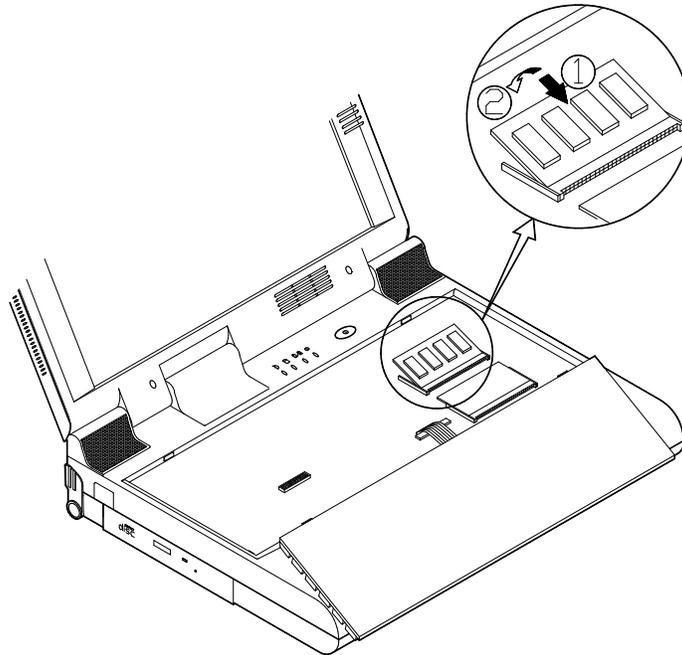

**Figure 2-6**

## Removing Memory Module

1. Turn the system power off.
2. Press the two keyboard latches so that the keyboard can be elevated from its normal position (Figure 2-3).
3. Carefully lift the keyboard assembly out to expose the mainboard. Locate the memory sockets (Figure 2-5).
4. Gently pull the two latches on both ends of the module outward. The module will pop up (Figure 2-7).
5. Remove the memory module.
6. Reinstall the keyboard assembly.

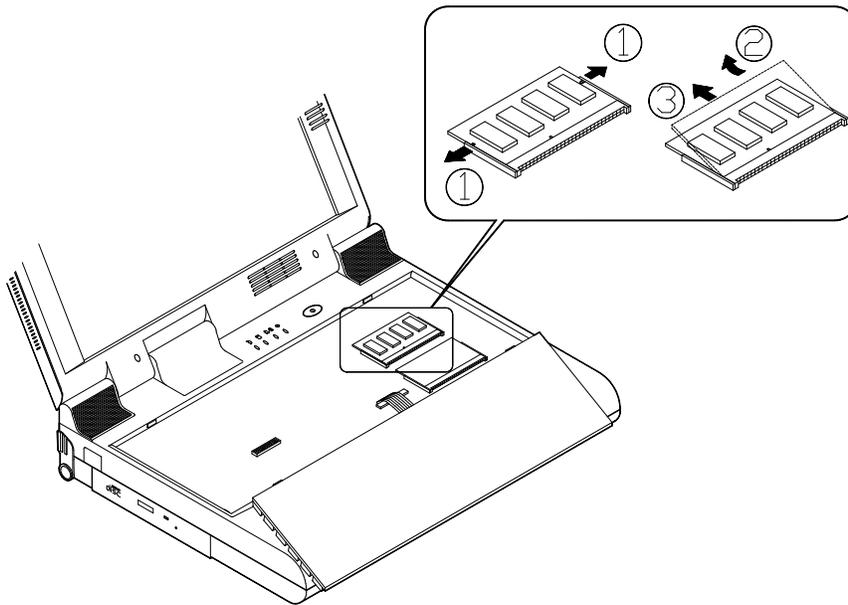


Figure 2-7

## Using Hard Disk Drive

The hard disk drive is mounted in a removable case and may therefore be taken out to accommodate other 2.5" IDE hard disk drives with a height of 12.7mm. The system supports drives with capacities greater than 528MB through the Logical Block Addressing (LBA) mode. It also supports Programmed I/O (PIO) mode 4, Bus Master IDE and provides a high performance data transfer rate at speeds up to 33 MBytes/second (ATA-33).

### Removing

1. Turn the system power off.
2. Turn the Notebook over.
3. Locate the Hard Disk Drive latch.
4. Press the latch in the direction indicated and slide the hard disk drive out of the Notebook (Figure 2-8).

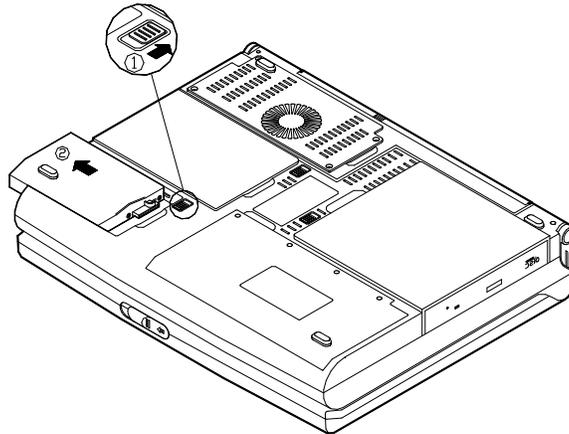


Figure 2-8

### Inserting

When inserting the hard disk drive back into the Notebook, be sure to seat the hard disk drive firmly. You will feel the drive click into position when it is seated properly.

## Replacing Hard Disk Drive

The hard disk drive is contained within a case. Two screws on each side of the case need to be removed so that the hard disk drive can be taken out of the case to replace with another one (Figure 2-9). **The location of the two screws may be varied depending on different hard disk models.** Gently disconnect the cable from the hard disk drive when taking it out of the case. Be careful not to bend any pins or crimp the cable.

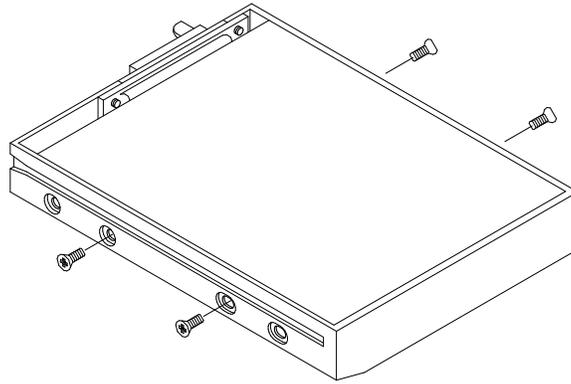


Figure 2-9


## **Using Floppy Disk Drive**

The Notebook comes standard with a 1.44MB, 3.5" floppy disk drive module. It is labeled drive A: and may be used as a boot device if properly set.

You may replace the floppy disk module with the following options: a 2.5" secondary hard disk drive (of 12.7mm high or less), a 3.0" secondary hard disk drive (of 12.5mm high or less), or a 100MB Zip drive (of 15mm high). Contact your dealer for more details regarding these options.

## **Inserting/Removing Diskettes**

When using the floppy drive, always insert your floppy diskette label-side up (Figure 2-10). To remove your diskette, press the eject button on the top-right corner of the floppy drive.

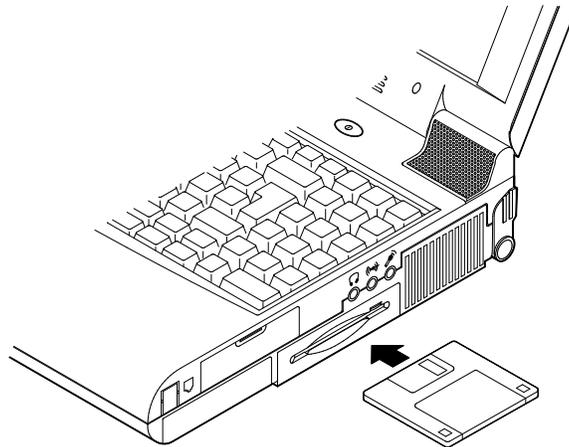

**Figure 2-10**

## Replacing Floppy Disk Drive

1. Turn the system power off.
2. Turn the Notebook over.
3. Locate the Floppy Disk Drive latch.
4. Press the latch in the direction indicated and slide the floppy disk drive out of the Notebook (Figure 2-11).
5. Slide the replacement drive (2.5"/3.0" secondary HDD or 100MB Zip drive) firmly into the Notebook Computer.

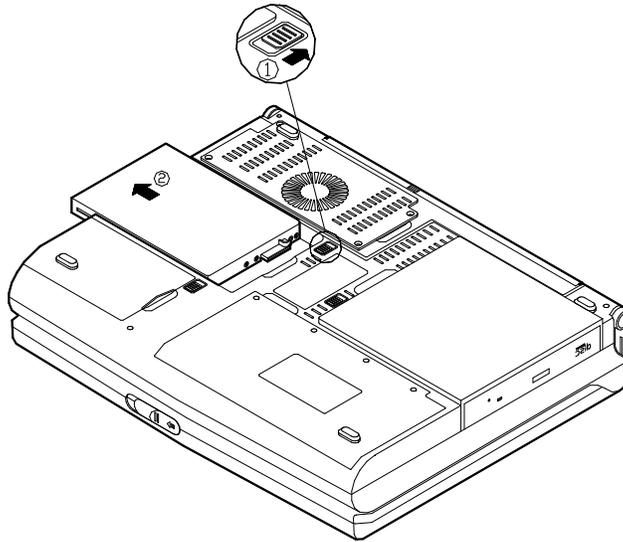


Figure 2-11

## Using CD-ROM

The Notebook comes standard with a removable 5.25" CD-ROM module. It is labeled drive D: and may be used as a boot device if properly set.

**Do not disassemble the CD-ROM module. Only certified technicians should perform repairs to the CD-ROM module.**

To insert a CD, press the **Eject Button** and place the CD on the **Disc Tray** label-side facing up. Push the CD tray in and you are ready to start. The **Busy Indicator** will light up while data is being accessed or while an audio CD is playing. When power to the system is unexpectedly interrupted, insert an instrument such as a straightened paper clip into the **Emergency Eject Hole** to manually eject the tray (Figure 2-12).

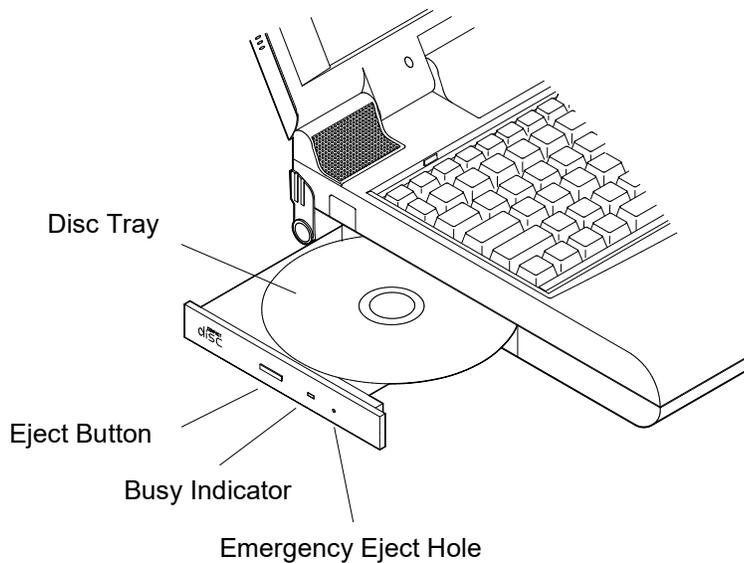


Figure 2-12

## Removing CD-ROM Module

1. Turn the system power off.
2. Turn the Notebook over.
3. Locate the CD-ROM latch.
4. Press the latch in the direction indicated and slide the CD-ROM module out of the Notebook (Figure 2-13).


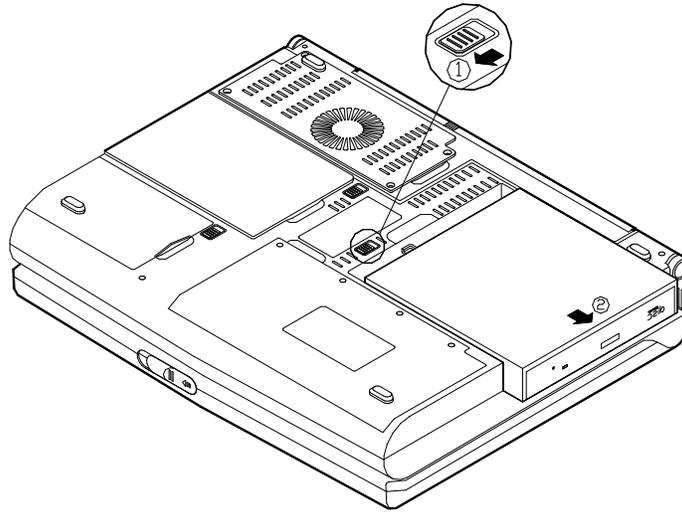


Figure 2-13

## **Loading Compact Discs**

1. Turn on the power.
2. Press the CD-ROM eject button; the disc tray will pop out partially.
3. Pull the disc tray out.
4. Carefully load the CD on the disc tray with label-side facing up. Press it gently to ensure it fits into place (Figure 2-14).
5. Push the tray into the computer to close it.

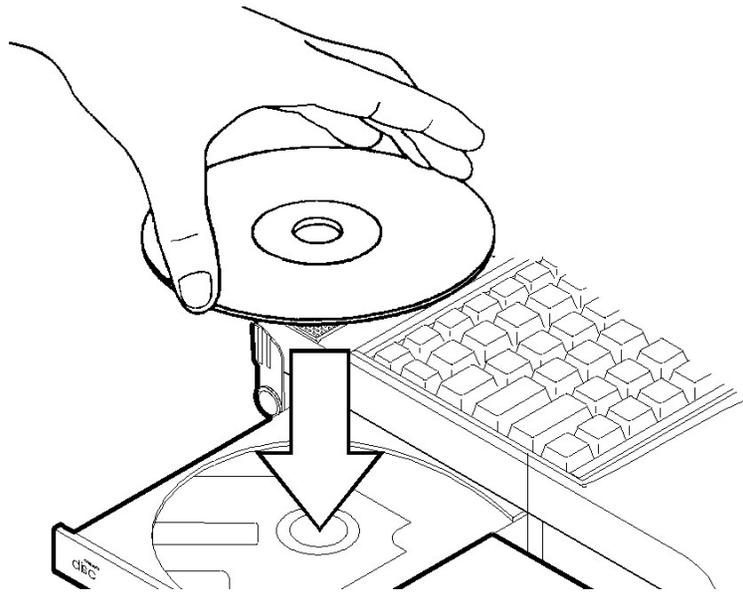

**Figure 2-14**

## Handling of Compact Discs


Proper handling of your CDs will prevent them from being damaged and ensure the accessibility of data stored on them.

- Hold the CD by the edges; do not touch the surface of the disc.
- Use clean, soft, dry cloth to remove dust or fingerprints.
- Do not write on the surface using pen.
- Do not attach any paper or other materials to the surface of the disk.
- Do not store or place the CD in areas where it will be exposed to high temperatures.
- Do not use benzine, thinners, or other cleaners to clean the CD.
- Do not bend the Compact Disc.
- Do not drop or subject the CDs to shock.

## Using PC Card Sockets

The Notebook provides system expansion capabilities with two PC card sockets (previously referred to as PCMCIA). PC cards to be inserted can be LAN, fax/modem, communication devices, or expanded memory. Both sockets support 5V/3.3V 16-bit PC cards and 3.3V 32-bit PC cards (referred to as **CardBus**). There are three types of PC cards. Type I measures 3.3mm thick; Type II 5.0mm; and Type III 10.5mm.

The PC card sockets on the right-side panel support one Type III card (equivalent to two Type II cards). The lower socket (socket A) is capable of **ZV (Zoomed Video)** (Figure 2-15).

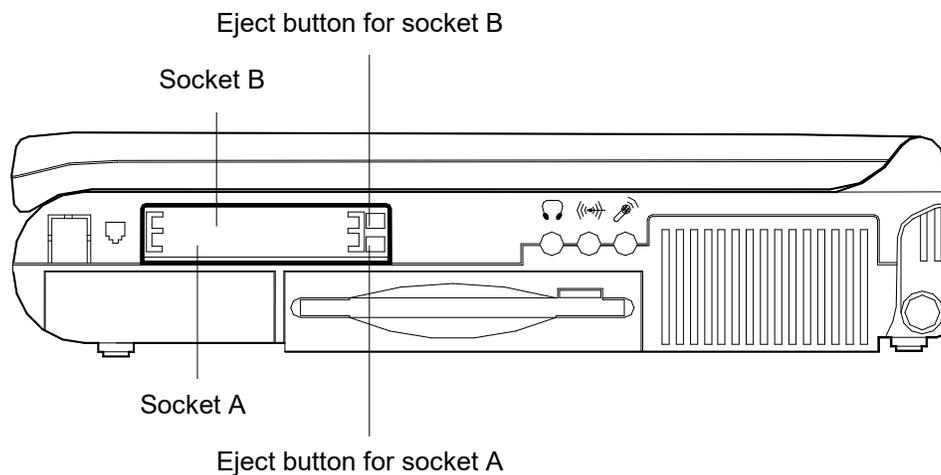

**Figure 2-15**

## Inserting PC Cards

1. Open the access door (Figure 2-16).
2. Align the PC card with the slot and push it in firmly until it locks into place (Figure 2-17).

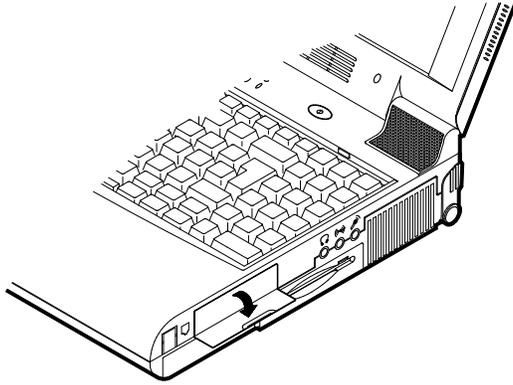


Figure 2-16

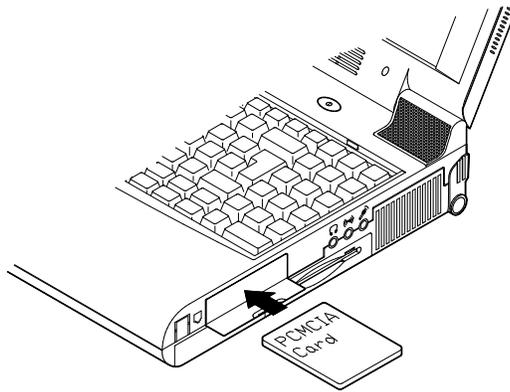


Figure 2-17

## Removing PC Cards

To remove a PC card, press the appropriate eject button and the card will be ejected from its slot (please refer to Figure 2-15).

## Using Hot Keys

Located on the bottom-left edge of the keyboard layout is a colored **Fn** key. It is a special feature found only on the Notebook that provides for key combinations with other keys for easy access to system features. Hold down the **Fn** key while pressing other key as below:

Hot Keys	System Features	Remark
 + 	Expand LCD display	
 + 	Control display top/center position	
 + 	Toggle CRT/LCD/LCD+CRT/TV/ CRT+TV	
 + 	Decrease LCD brightness	
 + 	Increase LCD brightness	
 + 	Decrease audio volume	
 + 	Increase audio volume	

 + 	Turn audio mute on/off	
 + 	Put the system in a suspend state for power management	

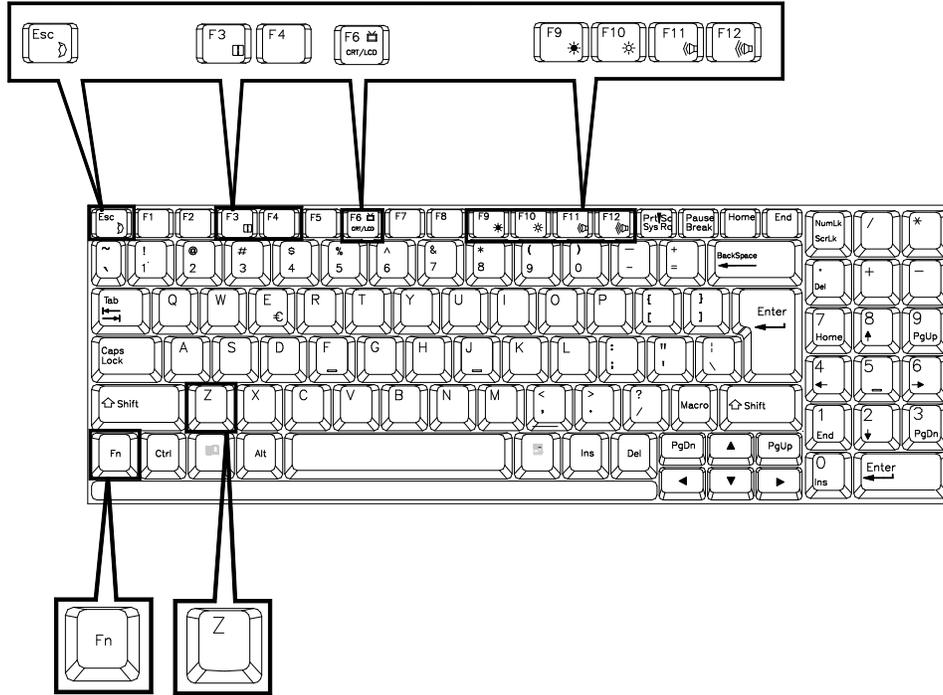


Figure 2-18

## ***Using Numeric Keypad***

The Notebook features a 102-key keyboard with an integrated numeric keypad for easy numeric data input (Figure 2-19).

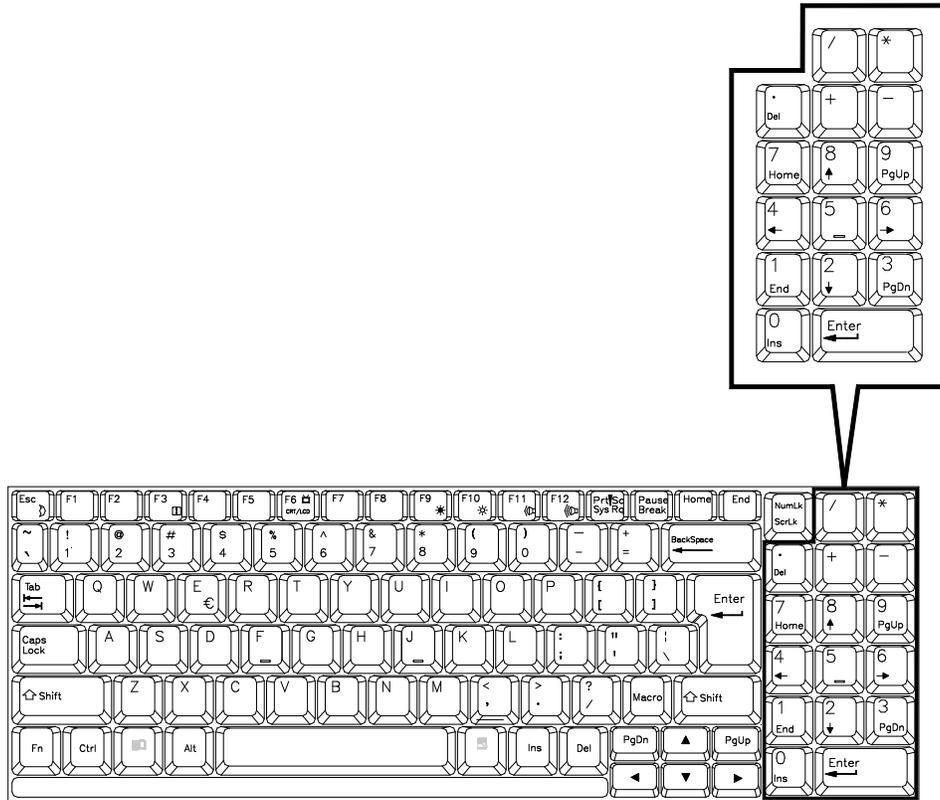


Figure 2-19



## ***TV Output***

The Notebook is equipped to send video signals to a TV set through the S-video jack. Different countries use different TV broadcast standards. A TV set must comply with the appropriate standard to properly receive broadcast signals. In the United States, TV sets are built to comply with the NTSC standard. Many countries in Europe and Asia use the PAL standard. You should refer to your TV user guide to make sure which TV standard you are using and enter the System Configuration Utility (SCU) to specify the proper TV mode (please refer to Chapter 3: BIOS Utilities, Components Menu for more information).

TV-output capabilities allow display of realistic game, video, and multimedia on a large-screen TV. The Notebook uses hardware filtering technologies to reduce flicker for better definition.

## ***LCD Panel***

The Notebook Computer features the LCD panel display with the following:

- PCI local bus controller.
- 4MB video RAM (SGRAM type).
- Capability to support 1024x768 (XGA) resolution DSTN/TFT display.
- Ability to transmit video signals to other video display devices including:
  - VGA monitor (CRT).
  - TV set.
- A VPM (Video Port Manager) provider, the driver-level software used, to gain direct control of the display hardware for video input from:
  - ZV-capable PC card.

### **Remark:**

Two technologies of LCD display:

- Passive technology (DSTN = Dual-scan Super Twisted Nematic).
- Active technology (TFT = Thin Film Transistor).

## ***Using Power Management***

The Notebook system provides you with various modes to manage its power consumption while maintaining system performance. Please refer to Chapter 3: BIOS Utilities, System Configuration Utility, Power Menu for more information.

### **Advanced Power Management (APM 1.2)**

The Notebook provides built-in Advanced Power Management (APM 1.2) support to reduce power consumption. APM function varies depending on the operating system you are using. **Some operating systems do not support APM, such as Windows NT, and therefore, cannot take advantage of the system's capabilities in this area.**

### **Advanced Configuration and Power Interface (ACPI)**

The ACPI interface gives the operating system (OS) direct control over the power management and Plug and Play functions of a computer. The operating system can perform the functions covered by the ACPI specification, such as system power management, device power management, and thermal management.

## **Global Standby**

In Global Standby mode, the CPU clock will be stopped and most controllable peripheral devices will be powered off. If the idle timer expires before any system activity is detected, the system will change from Standby mode into Suspend mode.

## **Suspend and Resume**

When at extremely low power the system will halt operations yet retain all its programming. This is called **Suspend Mode**. The Suspend Mode features three levels: Powered-On-Suspend (POS) mode, Suspend-To-RAM (STR) mode, and Suspend-To-Disk (STD) mode.

**Be sure not to initiate the Suspend Mode when any of the disk drives is accessed such as HDD, FDD and CD-ROM drive.**

The system operation can be returned to exactly where it was suspended when wake-up event occur. This is called **Resume**.

## **Powered On Suspend (POS)**

Of the three suspend modes, Powered-On-Suspend saves the least amount of power. However, it takes the shortest time to return to full operation.

### **Resume from POS Mode**

The system may be resumed from Powered-On-Suspend mode by:

- Alarm resume (month/day/hour/minute)
- Modem ring
- Any keyboard key pressed
- Depressing the power button (if configured as Suspend/Resume function under SCU)
- Opening the display lid (only if the suspend mode is initiated by closing the display lid)

## **Suspend To RAM (STR)**

Suspend-To-RAM mode is the medium level of system power management.

### **Resume from STR Mode**

The system may be resumed from Suspend-To RAM mode by:

- Alarm resume (month/day/hour/minute)
- Modem ring
- Depressing the power button (if configured as Suspend/Resume function under SCU)
- Opening the display lid (only if the suspend mode is initiated by closing the display lid)

## Suspend To Disk (STD)

Suspend to Disk is a 0-volt suspend mode for system power management. STD mode saves the maximum power but takes the longest time to return to full operation.

1. Use your operating system's FDISK program to delete all partitions of the hard disk if any already exist on the target drive.
2. Boot the system from the A: drive and run the 0VMAKFIL.EXE Utility to create the Suspend to Disk partition on the hard disk of a size that will accommodate **the installed DRAM (n) plus 4MB integrated video RAM**.

**A:\>0VMAKFIL /Pn**

For example, if the system DRAM is 32MB, 0VMAKFIL will create a partition size of approximately 36MB.

**A:\>0VMAKFIL /P32**

**Note:** Rewrite the sector signatures if you need to partition the hard disk again.

**C:\>0VMAKFIL /PW**

3. Re-partition the hard disk using your operating system's FDISK program.

## Resume from STD Mode

The system may be resumed from Suspend-To-Disk mode by:

- Power back on
- Alarm resume (month/day/hour/minute)
- Opening the display lid (only if the suspend mode is initiated by closing the display lid)



## Chapter 3: BIOS Utilities

This chapter provides information regarding the Power On Self Test (POST) and shows you how to configure the system parameters using the System Configuration Utility (SCU).

Power On Self Test (POST) .....	3-2
POST Message: Normal Operation.....	3-2
POST Message: Error Detected.....	3-3
System Configuration Utility (SCU) .....	3-4
Information in the SCU .....	3-4
Initiating the SCU .....	3-5
Working with the Menu Bar of the SCU.....	3-6
Working with the Pull-down Menu of the SCU.....	3-7
Features of the SCU .....	3-8
Startup Menu.....	3-8
Memory Menu .....	3-10
Disks Menu .....	3-11
Components Menu.....	3-13
Power Menu .....	3-16
Exit Menu .....	3-19

## **Power On Self Test (POST)**

The system BIOS (Basic Input/Output System) performs a series of Power On Self Test (POST) on system memory and key computer components every time the computer is turned on. If an error exists, the POST routine may halt execution (depending on the severity of the problem). The POST also initializes BIOS configuration then boots the operating system.

### **POST Message: Normal Operation**

If no error occurs, the system will be operating after the POST process is completed.

You may press the *Spacebar* key to skip the memory test.

SystemSoft BIOS for Intel 430TX Version 1.01 (2482-00)  
Copyright 1983-1996 SystemSoft Corp. All Rights Reserved

166 MHz Pentium CPU  
External Cache: 256KB Enabled  
4 MB Video RAM

Base Memory	000640 Kb
Extended Memory	031744 Kb
Total Memory	032768 Kb

Auto Detecting IDE Devices[Done]

<CTRL-ALT-S> to enter System Configuration Utility

## POST Message: Error Detected

If an error is detected, a WARNING message will be displayed. You should either press **F1** key to continue, or press the **Ctrl-Alt-S** keys simultaneously to enter the System Configuration Utility.

SystemSoft BIOS for Intel 430TX Version 1.01 (2482-00)  
Copyright 1983-1996 SystemSoft Corp. All Rights Reserved

166 MHz Pentium CPU  
External Cache: 256KB Enabled  
4 MB Video RAM

Base Memory	000640 Kb
Extended Memory	031744 Kb
Total Memory	032768 Kb

WARNING – HARD DISK CONTROLLER 1 FAILURE  
Auto Detecting IDE Devices[Done]

<CTRL-ALT-S> to enter System Configuration Utility  
Press F1 to Continue

## **System Configuration Utility**

The System Configuration Utility (SCU) is a ROM-based configuration utility that displays the system's configuration status and provides users with a tool to set their system parameters. The settings are stored in non-volatile battery-backed CMOS RAM which saves the information even when the power is turned off, and retains it when the system is turned back on.

### **Information in the System Configuration Utility**

The following shows the system settings that may be changed within the System Configuration Utility.


<b>Menu Bar Items</b>	<b>Pull-down Menu Items</b>
Startup	Date and Time, Fast Boot, Boot Device, Display, Enable Battery Low Beep, Enable LCD Expand Mode, Enable Power On Sound, Boot Password, SCU Password.
Memory	Cache Systems.
Disks	Diskette Drives, IDE Settings.
Components	COM Ports, Enable Internal FAX/MODEM Module, LPT Port, PS/2 Mouse Port, Keyboard Numlock, Keyboard Repeat, Audio Device, TV Mode.
Power	Enable Power Saving, Low Power Saving, Medium Power Saving, High Power Saving, Customize, Suspend Controls, Resume Timer, Enable MODEM Ring Resume, Enable Battery Low Suspend, Advance CPU Controls.
Exit	Save and Exit, Exit (No Save), Default Settings, Restore Settings, Version Info.

## Initiating the System Configuration Utility

The System Configuration Utility (SCU) will be accessed when simultaneously pressing the **Ctrl**, **Alt**, and **S** keys.

<CTRL-ALT-S> to enter System Configuration Utility

The above message only lasts seconds. If you miss it, the computer will initiate the boot process. You must reboot the system and try again within the time limit if you want to enter the System Configuration Utility.

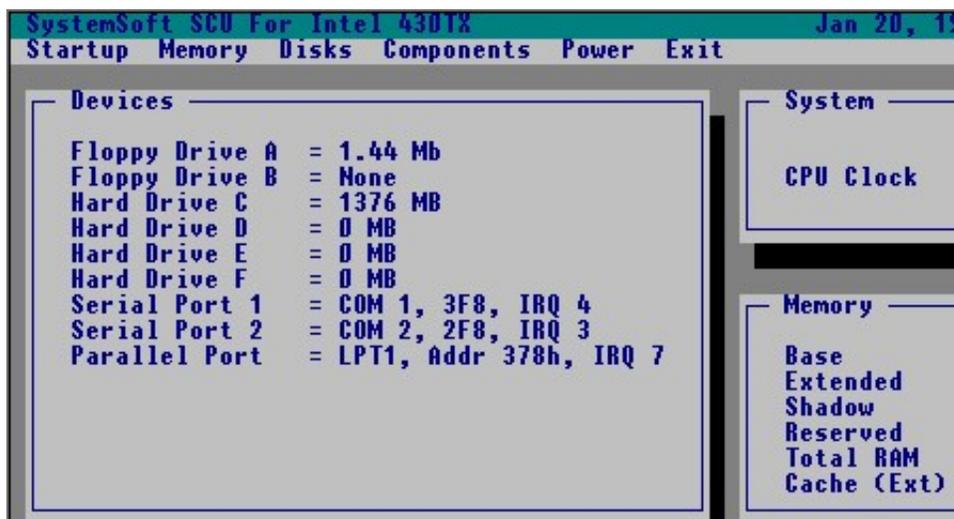

**Figure 3-1**  
*System Configuration Utility (SCU)*

## Working with the Menu Bar of the System Configuration Utility

Press **Ctrl-Alt-S** keys simultaneously to enter the menu bar of the System Configuration Utility.

Action	Keys Used	Description
Activate menus	Alt	Activate the System Configuration Utility.
Select menu bar item	Left arrow (←)	Move to a menu bar item on the left.
	Right arrow (→)	Move to a menu bar item on the right.
	The highlighted letter key	Move to the corresponding menu bar item.
Accept menu bar item	Mouse left button Spacebar Enter	Enter the selected menu bar item to configure settings.
Cancel current action	Mouse right button Esc	Undo the current command.

## Working with the Pull-down Menu of the System Configuration Utility

When the desired menu bar item is highlighted, press the **Enter** key to enter the pull-down menu for values setting.


Action	Keys Used	Description
Select pull-down menu item	Down arrow (↓)	Move to the next pull-down menu item.
	Up arrow (↑)	Move to the previous pull-down menu item.
	The highlighted letter key	Move to the corresponding pull-down menu item.
Select a control	Tab	Move between the options.
Change values	Down/Up arrows (↓)(↑)	Modify the settings.
Accept entries	Spacebar	Enable/disable the specified function. When a check mark (√) appears, the function is on.
	Enter	Choose <OK> from a list of options.
Reject entries	Esc	Undo the current setting.
	Enter	Choose <Cancel> from a list of options.
Activate accelerators	Alt	Initiate all the highlighted letters corresponding to their respective options.
Quit	Esc	Press the Esc key to close the pull-down menu.

## Features of the System Configuration Utility

### Startup Menu

Item	Setting/Option	Function
Date and Time	Day/Month/Year Hour/Minute/Second	Set the current date and time.
Fast Boot	Enable	Initialize and quickly boot the system in a few seconds by skipping certain diagnostic tests.
	Disable	Disable the above.
Boot Device	Diskette A	Specify where the system boots from.
	Hard Disk C	
	CD-ROM Drive	
Display	CRT	Activate an external monitor.
	LCD	Activate the system's LCD panel.
	LCD+CRT	Activate both the LCD and the CRT.
	TV	Activate an external TV.
	CRT+TV	Activate both the CRT and the TV.
Enable Battery Low Beep	Enable	The system emits a series of warning beeps sound when the battery power becomes low.
	Disable	Disable the above.
Enable LCD Expand Mode	Enable	Stretch the display to fill the entire viewing area of the LCD panel.
	Disable	Disable the above.
Enable Power On Sound	Enable	Enable/Disable power on sound playback.
	Disable	

Item	Setting/Option	Function
Boot Password	Enter old Power-On Password	Set password for booting computer. Users are authorized to start the system after entering correct password.
	Enter new Power-On Password	
	Verify new Power-On Password	
	Enable Password to Power-On	
SCU Password	Enter old Setup Password	Set password for modifying SCU. Users are authorized to change the SCU setting after entering correct password.
	Enter new Setup Password	
	Verify new Setup Password	
	Enable Setup Password	

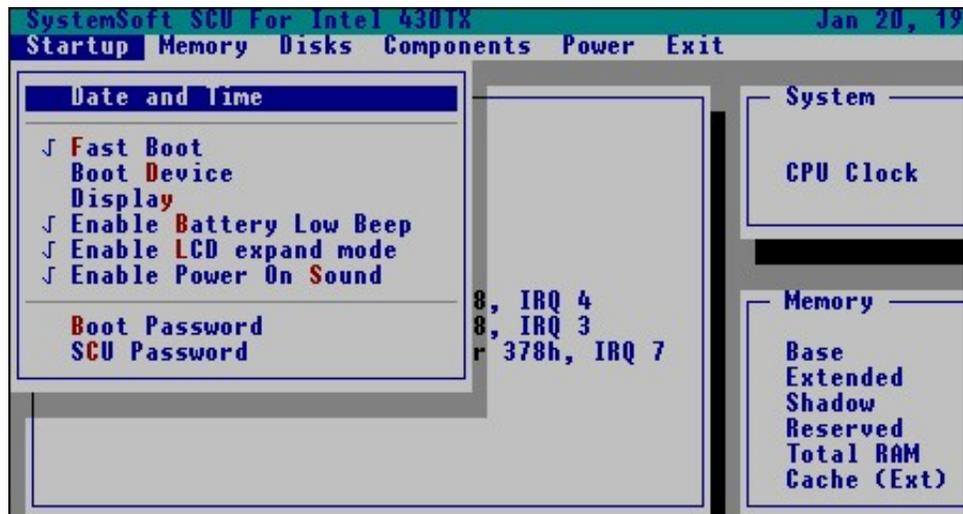


**Figure 3-2**  
Startup Menu



## Memory Menu

Item	Setting/Option		Function
Cache Systems	L1 Cache	Disabled	Disable the processor's internal cache.
		Write Back	Enable the processor's internal write-back cache.
	L2 Cache	Disabled	Disable the L2 cache controller.
		Write Back	Enable the L2 write-back cache.

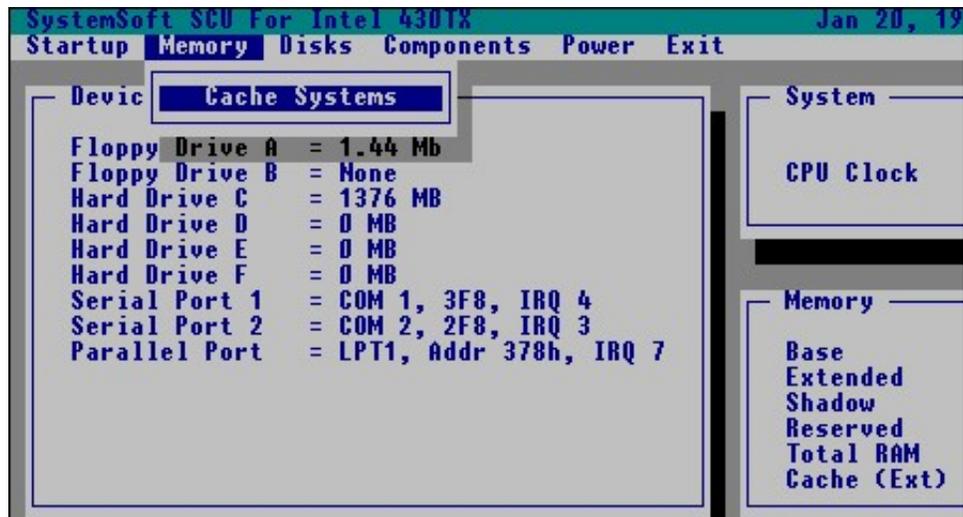

**Figure 3-3**  
Memory Menu

## Disks Menu

Item	Setting/Option		Function
Diskette Drives	Drive A	None	Specify the drive types for the diskette drive A and B.
		1.2 MB	
		720 KB	
		1.44 MB	
		2.88 MB	
	Drive B	None	
		1.2 MB	
		720 KB	
		1.44 MB	
		2.88 MB	
IDE Settings	Primary HDD	Drive Enabled	Enable enhanced IDE settings.  (When CD-ROM is selected as boot device, remember to enable CD-ROM drive.)
		PIO Mode	
	CD-ROM	Drive Enabled	
		PIO Mode	


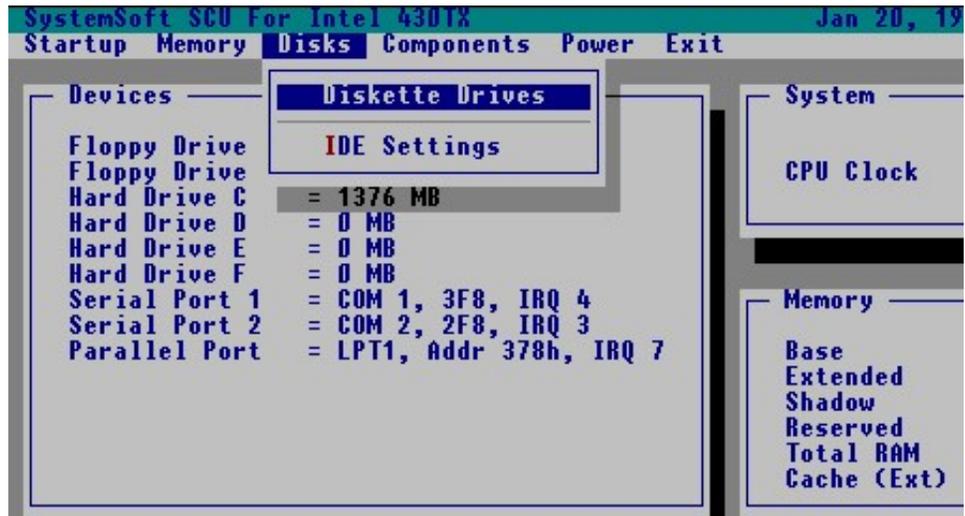


Figure 3-4  
Disks Menu

## Components Menu

Item	Setting/Option		Function
COM Ports	COM A I/O Settings	None	Specify the COM A configuration.
		COM1, 3F8, IRQ4	
		COM2, 2F8, IRQ3	
		COM3, 3E8, IRQ4	
		COM4, 2E8, IRQ3	
	COM B I/O Settings	None	Specify the COM B configuration.
		COM1, 3F8, IRQ4	
		COM2, 2F8, IRQ3	
		COM3, 3E8, IRQ4	
		COM4, 2E8, IRQ3	
	Mode Setting For COM B	Normal (16550A)	Define the COM B hardware.
		IrDA (HPSIR)	
		ASK IR	
FAST IR			
DMA Setting For Fast IR	DMA 0	Specify the Fast IR DMA configuration.	
	DMA 1		
	DMA 3		
Enable Internal FAX/MODEM Module	Enable		Enable/Disable the optional FAX/MODEM module.
	Disable		
LPT Port	Port Address	None	Specify the LPT port and IRQ configuration.
		LPT1, Addr 378h, IRQ7	
		LPT2, Addr 278h, IRQ5	
		LPT3, Addr 3BCh, IRQ7	
	Port Definition	Standard AT (Centronics)	
		Bidirectional (PS-2)	
		Enhanced Parallel (EPP)	
		Extended Capabilities (ECP)	
	DMA Setting For ECP Mode	DMA 1	Specify the ECP DMA configuration.
		DMA 3	
EPP Type	EPP 1.7	Specify the EPP type.	
	EPP 1.9		

Item	Setting/Option		Function
PS/2 Mouse Port	Enable		Enable the system's trackpad or an external PS/2 mouse.
	Disable		Disable the trackpad or PS/2 mouse if an external mouse is connected to COM A port.
Keyboard Numlock	Enable		Specify whether Num Lock is on or off at system boot time.
	Disable		
Keyboard Repeat	Key Repeat Rate	2 cps	Define the rate (characters per second) at which the keyboard repeats while a key is depressed.
		6 cps	
		10 cps	
		15 cps	
		20 cps	
		30 cps	
	Key Delay	1/4 sec	Specify the amount of time (second) that will pass after a key is depressed before the key starts to repeat.
		1/2 sec	
3/4 sec			
1 sec			
Audio Device	Audio Device	Disable	Enable/Disable the audio device.
		Enable	
	Audio Port Addresses	At 220h-22Fh	Specify the audio port address.
		At 240h-24Fh	
		At 260h-26Fh	
		At 280h-28Fh	
	MIDI Port Addresses	At 300h-303h	Specify the MIDI port address.
		At 330h-333h	
	Audio, MIDI IRQ	IRQ 5	Specify the IRQ configuration for audio or MIDI port.
		IRQ 7	
		IRQ 9	
		IRQ 10	
Playback DMA	DMA 0	Specify the DMA channels for audio playback.	
	DMA 1		
Record DMA	DMA 1	Specify the DMA channels for audio recording.	
	DMA 3		
TV Mode	TV Modes Selection	Japanese NTSC	Specify the TV mode as NTSC or PAL.
		US NTSC	
		PAL	

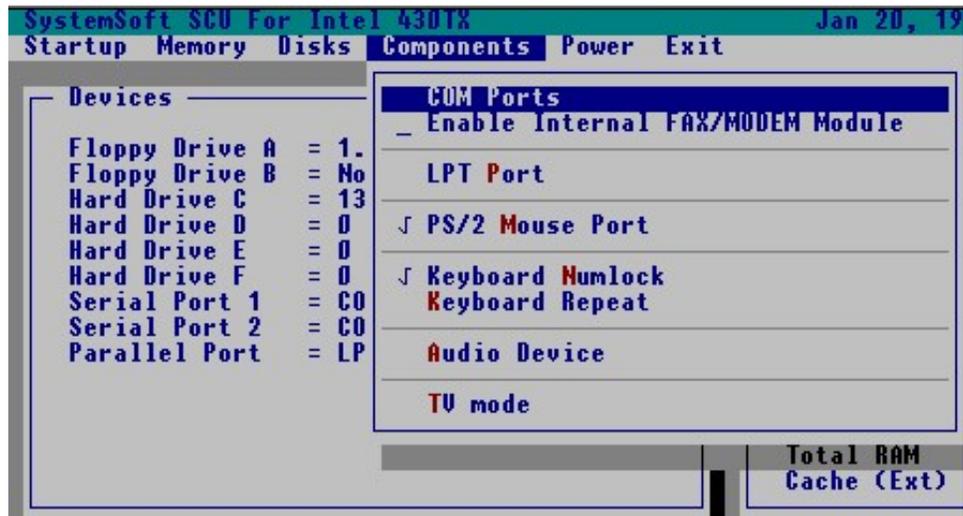

**Figure 3-5**  
*Components Menu*

## Power Menu

Item	Setting/Option		Function
Enable Power Saving	Enable		Enable/Disable all power saving features.
	Disable		
Low Power Saving	Enable		Enable/Disable the power saving to its lowest which results in max. performance but shortest battery life.
	Disable		
Medium Power Saving	Enable		Enable/Disable the power saving to its medium which results in both moderate performance and battery life.
	Disable		
High Power Saving	Enable		Enable/Disable the power saving to its highest which results in min. performance but longest battery life.
	Disable		
Customize	Disk Standby	Always on	The hard disk will be put on standby if it is not accessed within the specified period. Hard disk power will be restored when the disk drive is accessed again.
		30 sec	
		1 min	
		3 min	
		10 min	
	Global Standby	Always on	The system power will be reduced if the system has been idle for the specified period. System power will be restored when any system activity is detected.
		1 min	
		2 min	
		4 min	
		6 min	
		8 min	
		12 min	
16 min			

Item	Setting/Option		Function
Suspend Controls	Power Button Function	Power On/Off	The power button is switched to turn the system on or off.
		Suspend/Resume	The power button acts as a <b>suspend/resume button</b> for switching the system between a working state and the suspend mode.
			Pressing the power button for more than four seconds will generate a <b>power button over-ride event</b> to switch the system from a working state to the Soft-Off state.
	Lid Switch Function	Suspend/Resume	Enter suspend mode or resume by closing or opening the display lid.
		LCD Panel Off/On	Turn the panel power on or off by opening or closing the display lid.
	Suspend Type	Suspend To Disk	Specify the suspend mode for power management.
		Suspend To RAM	
		Powered On Suspend	
	Suspend Timeout	Never	If the system has been idle for the specified period, the system will enter user-defined suspend.
		1 min	
5 min			
10 min			
20 min			
Resume Timer	Alarm Resume	Enable	Resume the system from the configured suspend mode when resume alarm timer expires.
		Disable	
	Resume Month/Day/Hour/Minute		The system will resume at the specified time (month, day, hour and minute).

Item	Setting/Option		Function
Enable MODEM Ring Resume	Enable		Resume the system from STR or POS mode when a modem ring is detected (which modem should be connected to the serial port).
	Disable		Disable the above.
Enable Battery Low Suspend	Enable		Automatically suspend the system to <b>disk</b> upon a low battery condition.
	Disable		Disable the above.
Advance CPU Controls	Clock Control Mechanism	Full Speed	Specify the type of Processor Clock Control.
		Doze Mode	


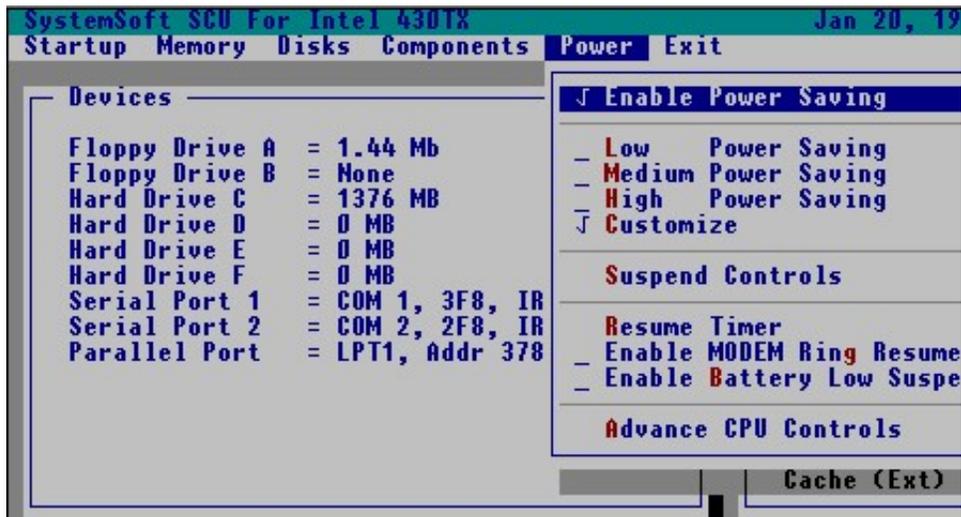


Figure 3-6  
Power Menu



## Exit Menu

Item	Function
Save and Exit	Save the current settings and reboot the system.
Exit (No Save)	Exit without saving any current changes.
Default Settings	Restore the default settings (the original ones found in ROM).
Restore Settings	Restore the current setup settings to the original custom ones.
Version Info	Show current BIOS version information.

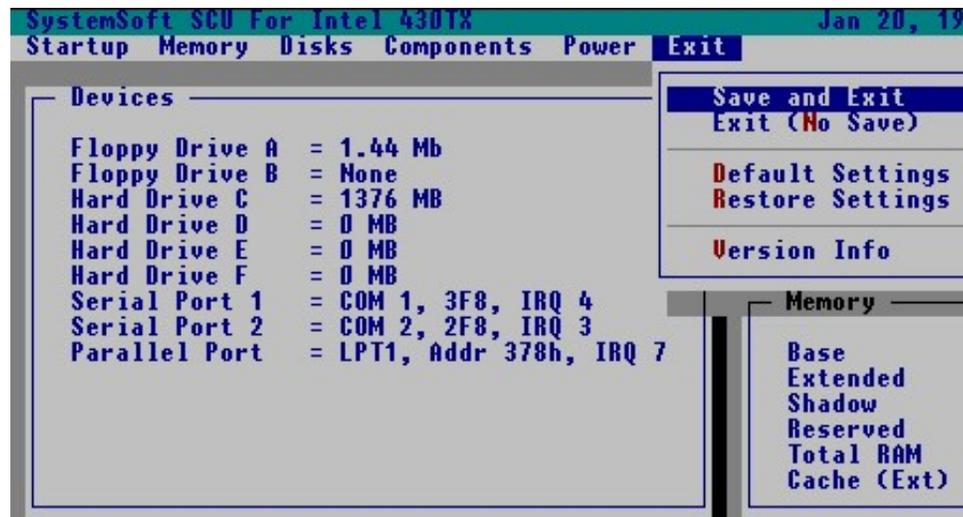

**Figure 3-7**  
Exit Menu




# ***Chapter 4: Peripheral Devices***

This chapter shows you how to attach peripheral devices to the ports or jacks on the rear panel of the Notebook Computer.

Attaching a Security Lock.....	4-2
Attaching a Parallel Printer.....	4-3
Attaching a TV Set .....	4-4
Attaching a Video Input Device .....	4-5
Attaching a USB-compatible Device .....	4-6
Attaching a Serial Mouse .....	4-7
Attaching an External Monitor (CRT).....	4-8
Attaching a PS/2 Keyboard or Mouse .....	4-9

## Attaching a Security Lock

To protect your Notebook from being stolen, the computer is equipped with a security connector. To install the security lock, wrap the cable around a desk or other immovable object then insert the locking device into the connector (Figure 4-1).

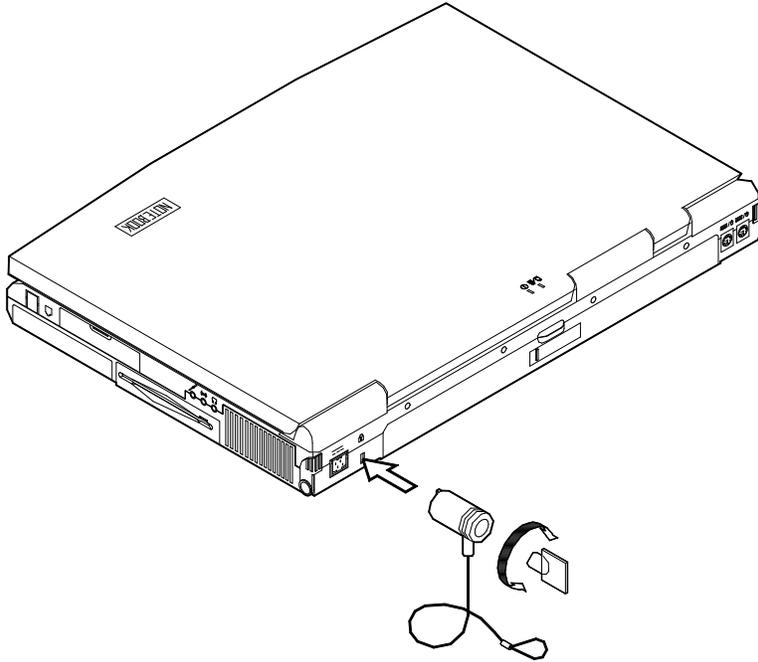

**Figure 4-1**

## Attaching a Parallel Printer

You may connect any standard Centronics parallel printer to your Notebook using the parallel port.

1. Turn the system power off.
2. Connect the cable to the parallel port on the rear of the Notebook Computer.
3. Tighten the screws that fasten the cable to the parallel port (Figure 4-2).
4. Insert the other end of the cable to the printer's connector. Fasten the cable's connector.
5. Turn on the printer and Notebook Computer.

In addition, you will need to install the manufacturer-supplied driver for the printer. Refer to the device's user's guide for more information. If the connected printer supports EPP (Enhanced Parallel Port) or ECP (Extended Capabilities Port) mode, please enter System Configuration Utility (SCU) to configure the required setting.

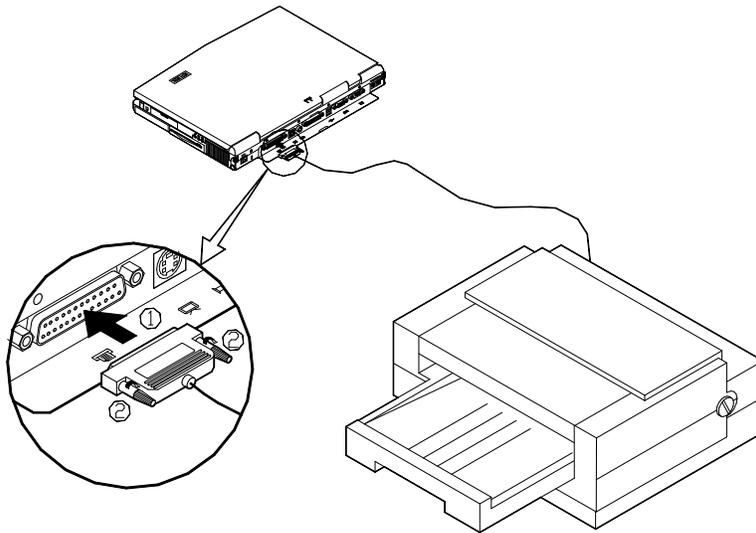


Figure 4-2

## Attaching a TV Set

The S-video jack on the rear panel of the Notebook is used for transmitting video signals to a TV set. You may need to select the video standard for video display. Enter the System Configuration Utility (SCU), Components Menu to specify the appropriate TV mode. Simultaneous display on external monitor (CRT) and TV is available. You may enter the SCU to select the appropriate parameters or use the **Fn + F6** keys (refer to Chapter 2, Using Hot Keys).

Attach the TV set as shown below (Figure 4-3).

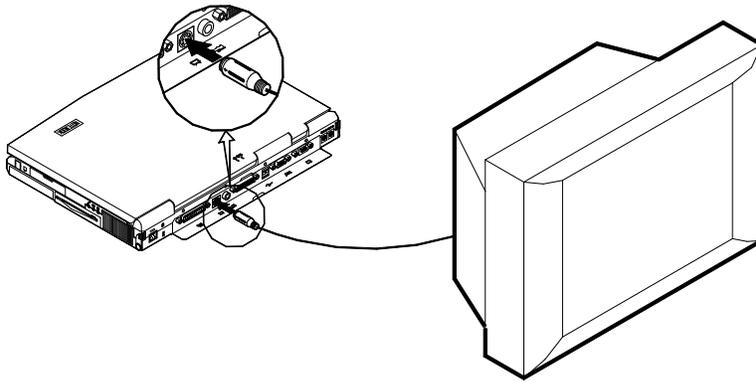


Figure 4-3

## Attaching a Video Input Device

The RCA jack on the rear panel of the Notebook allows analog composite signal input from external video devices. Attach the device as shown below (Figure 4-4).


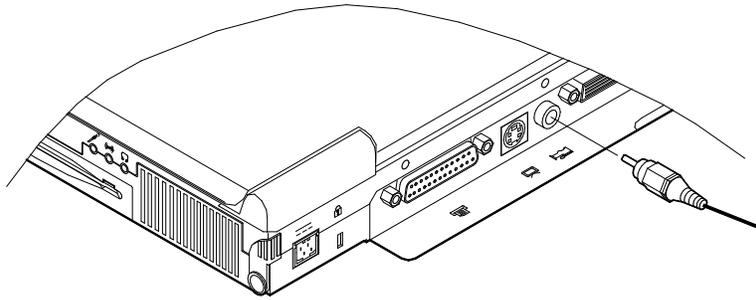


Figure 4-4

## Attaching a USB-compatible Device

The Notebook provides dual USB ports for connection of a USB-compatible keyboard, mouse or other devices. Attach the device as shown below (Figure 4-5).

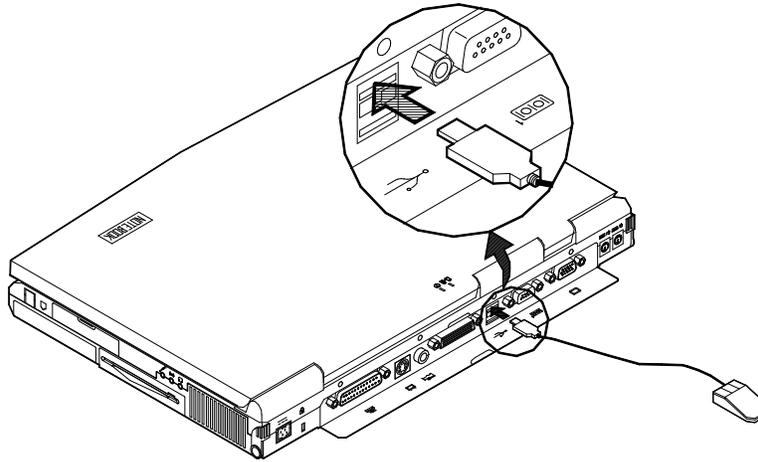

**Figure 4-5**

## Attaching a Serial Mouse

The serial port features a 9-pin connector. You can connect any serial device such as a mouse to this port.

1. Turn the system power off.
2. Connect the cable to the serial port on the rear of the Notebook Computer.
3. Tighten the screws that fasten the cable to the serial port (Figure 4-6).
4. Turn on the Notebook Computer.

In addition, you may need to install the manufacturer-supplied driver for the serial mouse. Refer to the device's user's guide for more information.

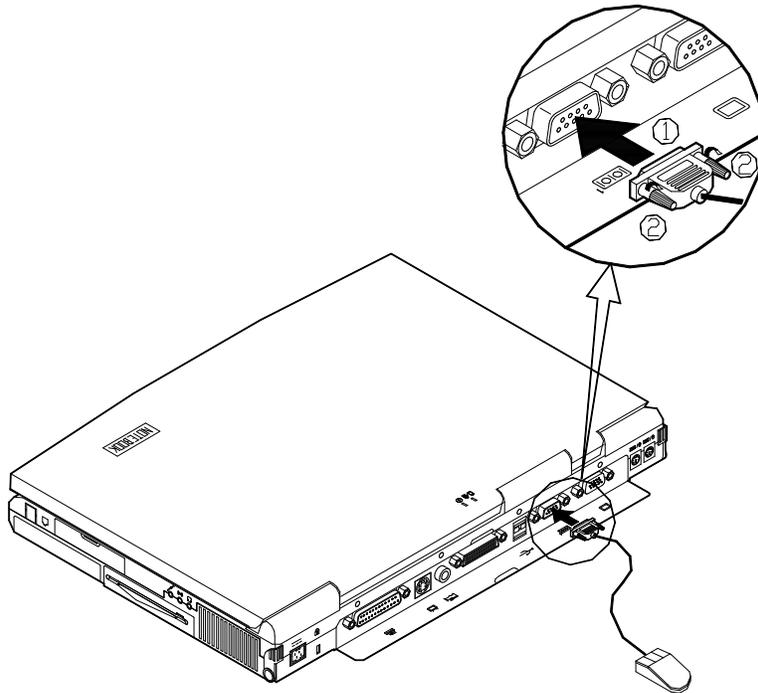


Figure 4-6

## Attaching an External Monitor (CRT)

The computer is capable of displaying information not only on the LCD, but also on XGA compatible displays attached to the computer. Information can be displayed on both the LCD and the external monitor simultaneously. Enter the System Configuration Utility (SCU) to select the appropriate parameters or use the **Fn + F6** keys (refer to Chapter 2, Using Hot Keys).

1. Turn the system power off.
2. Connect the cable to the CRT port on the rear of the Notebook Computer.
3. Tighten the screws that fasten the cable to the CRT port (Figure 4-7).
4. Insert the other end of the cable to the external monitor.
5. Turn on the Notebook Computer.

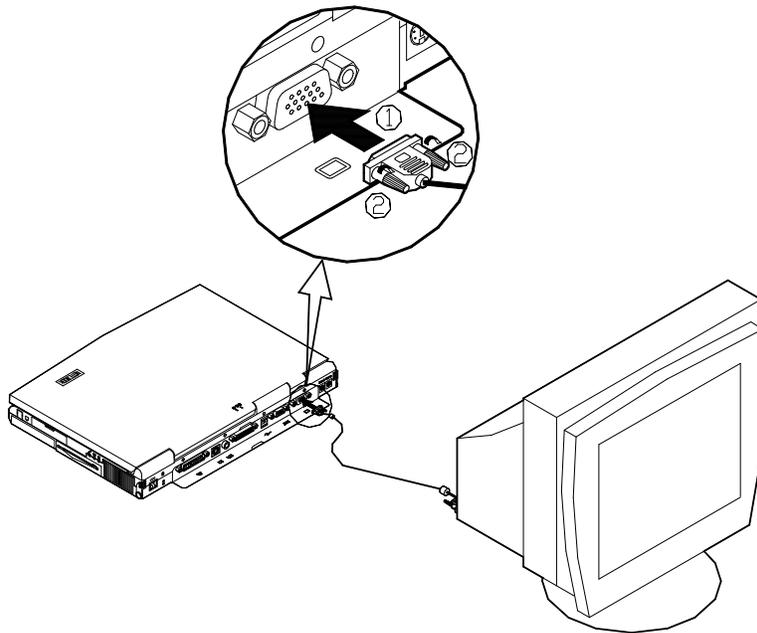


Figure 4-7

## Attaching a PS/2 Keyboard or Mouse

The Notebook can be operated with a PS/2 keyboard or mouse attached by means of the PS/2 transfer cable. Attach the external keyboard or mouse as shown below (Figure 4-8).

Both PS/2 type ports on the rear panel of the Notebook can be used for the connection of a PS/2 keyboard and mouse.

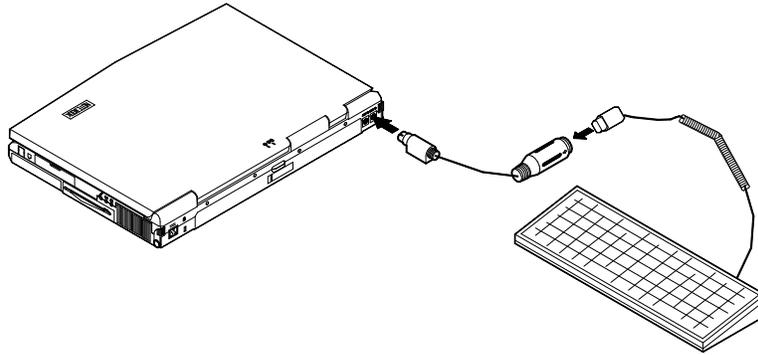


Figure 4-8



## ***Chapter 5: Installing Drivers***

This chapter provides you with the step-by-step instructions of installing device drivers and utilities. Information in this chapter has been designed to suit for the users who has the basic computer knowledge. However, the unexperienced users also can get good help from this chapter.

***To install the device drivers successfully, please follow the order as below:***

***Windows 95/USB/Txpatch/Audio/Video/PCMCIA***

## Installing Windows 95

### □ **Preparation for installing Windows 95:**

1. Use a bootable floppy disk to start the system.
2. Run FDISK utility from DOS to create a bootable partition.  
(See DOS manual for the operation detail.)
3. Format hard disk. Follow the command "Format C:/S" to create a bootable hard disk and make the boot system file.  
(C:/S copies system files to the formatted disk)
4. Run CDINST.COM program from the "CD-ROM Drive Installation Diskette" that will help you to install CD-ROM driver device automatically. See the driver manual for detail.
5. Restart the system.

### **Now, follow the steps as below to install Windows 95.**

1. Start DOS.
2. Insert the Windows 95 CD-ROM.
3. Go to the "setup" directory, type "setup", then press [Enter].
4. After the Windows 95 setup program performs a routine check on your system, press [enter] to continue.
5. When the "Welcome to Windows 95 Setup" screen appears, click "Continue".
6. Click "Yes" on the "License Agreement" screen.
7. Click "Next" to select "Collecting Information About your PC".
8. Click "Next" to select the default of "C:\Windows", or enter a different directory.
9. On the screen of "Setup Options", select "Typical", then click "Next".
10. On the screen of "Certificate of Authenticity", enter the Product Identification Number, then click "Next".
11. On the screen of "User Information", enter your name and company, then click "Next".

12. Select “Install The Most Common Components (recommended)”, then click “Next”.
13. On the screen of “Startup Disk”, insert a blank diskette into the A drive to create a startup diskette.
14. The Setup Wizard is now copying files. After the copying is finished, remove the disk, then click “OK”.
15. Click “Next” to start copying Windows 95 files to your computer.
16. Click “Finish” to restart Windows 95.
17. On the screen of “Set Up a Printer”, click “Cancel”.  
Note: Do not install a printer at this time. You will not be able to access the Windows 95 Installation CD until you reboot.
18. Click “OK” to restart the Notebook PC.

□ **Check the system before installing the drivers**

Before install the following utility drivers, please follow the path “start\setting\control panel\system\device manager” to check the status of system properties. The screen should be as below: (See Figure 5-1)

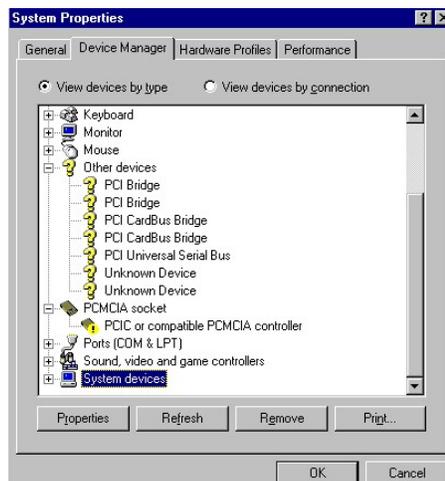


Figure 5-1

## Installing USB Driver

**Note:** The USB driver can be located from the "Microsoft Windows 95 OEM Service Release" CD-ROM.

- In version OSR 2.5, locate the supplement from the path:  
    \other\updates\USB.
- In version OSR2.1, locate the supplement from the path: \other\USB.

1. Double click the Usbsupp. (See Figure 5-2)
2. Click "Yes" to install Microsoft USB Supplement to the system.
3. Follow the instruction on the screen.
4. Restart the computer to finish installation.



Figure 5-2

## Installing Txpatch File

1. Insert the Driver & Utility CD-ROM
2. From the Txpatch directory, run “Setup”, then click “Next”.  
(See Figure 5-3)
3. On the screen of “License Agreement”, click “Yes” if you agree the license.
4. Click “Next” to update the Intel “82371xB.inf” files.
5. Click “OK” to restart the computer.
6. Click My Computer\Control Panel\System\Device Manager to check the installation. The screen should be as below. (See Figure 5-4)



Figure 5-3


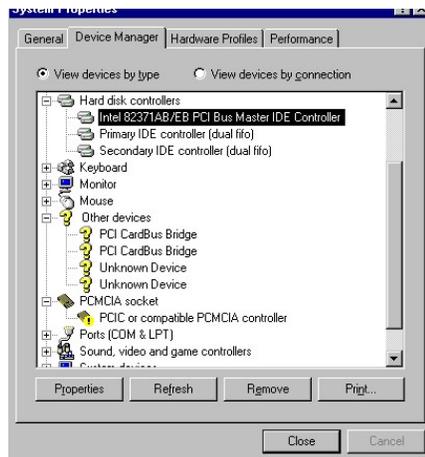


Figure 5-4

## Installing Audio Driver

1. Insert the Driver & Utility CD-ROM.
2. Double click "My Computer", then click "Control Panel\System".
3. Click "Device Manager" tab.
4. Open "Other devices".
5. Click "Unknown Device". (See Figure 5-5)
6. Select "Driver".
7. Click "Update Driver".
8. Select "Yes (Recommended)" to search for the driver" and click "Next".
9. Click "Other Locations".
10. Click "Browse" to locate the audio driver from the Driver & Utility CD-ROM. The path is:\Audio\Win95. Then click "OK".
11. Click "Finish" to set up the first audio driver.
12. Repeat the steps from 1-10 to set up the second driver.

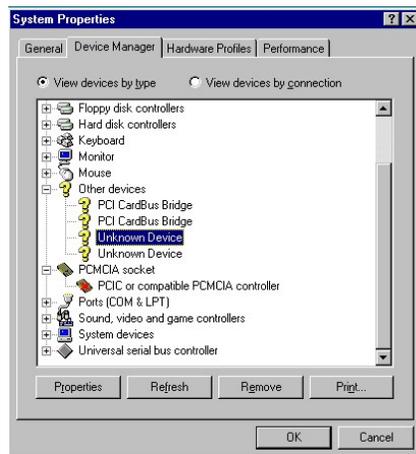

**Figure 5-5**

**Note:** Sometimes the system needs to read the data from Windows 95 CD-ROM. Insert the CD-ROM as required. (See Figure 5-6)



**Figure 5-6**

## Installing Video Driver

1. Insert the Driver & Utility CD-ROM.
2. Double click "My Computer", then click "Control Panel\System".
3. Select "Device Manager".
4. Open "Display adapters".
5. Click "Standard PCI Graphics Adapter (VGA)".
6. Click "Driver".
7. Click "Update Driver".
8. Select "Yes(Recommended)" to search for the driver" and click "Next".
9. Click "Other Locations". (See Figure 5-7)
13. Click "Browse" to locate the video driver from the Driver & Utility CD-ROM. The path is:\Video\Win95. Then click "OK".
10. Click "Finish" to set up the video driver.
11. Restart the computer to finish setup.



Figure 5-7

## Installing PCMCIA Driver

**Note:** Before installing the driver, you need to copy the three PCMCIA files on the CD-ROM to C:\.

Copy "Cbss.vxd" & "Pccard.vxd" to C:\Windows\System

Copy "Pcmcia" to C:\Windows\Inf (See Figure 5-8)

(Click view/options, then select "show all files" to show the three files.)

1. Insert the Driver & Utility CD-ROM.
2. Double click "My Computer", then click "Control Panel\System".
3. Select "Device Manger".
4. Open "Other devices".
5. Click the first "PCI CardBus Bridge" to set up the first PCMCIA driver.
6. Select "Driver".
7. Click "Update Driver".
8. Select "Yes (Recommended)" to search for the driver and click "Next".
9. Click "Other Locations".
10. Click "Browse" to locate the PCMCIA driver from the Driver & Utility CD-ROM. The path is:\PCMCIA\Win95. Then click "OK".
11. Click "Finish" to set up the first driver.
12. Repeat the steps from 1 to 10 to set up the second PCMCIA driver.


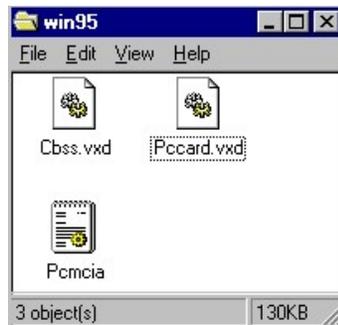


Figure 5-8

□ **Check the installation is complete or not?**

After finishing the installation, select the "Device Manager" on "Control Panel" to see if you have successfully installed the above driver devices. The screen should be as below: (See Figure 5-9)

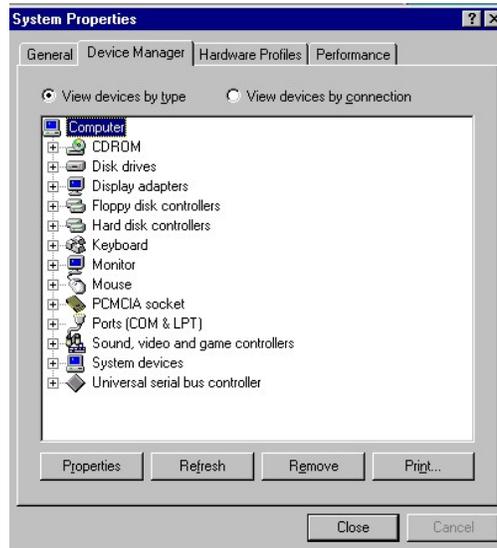

**Figure 5-9**



## Appendix A: Specifications

This appendix describes the features and specifications for the Notebook Computer.

### Processor Module

- Intel Mobile Module (IMM) structure.
- 133/150/166/200/233/266MHz Intel Pentium Processor Module.
- 233/266/300MHz Intel Pentium II Processor Module.

### Memory

- 3.3V power supply.
- Supports Fast Page Mode/EDO/SDRAM.
- 256KB/512KB secondary cache pipeline burst synchronous SRAM (depending on IMM).
- 8MB expandable up to 128MB.
- *8/16/32/64MB 144-pin SODIMM RAM modules (optional).*  
*\*(The x4 bit DRAM chips are not supported.)*

### System BIOS

- 256KB flash ROM.
- PCI 2.1.
- Plug and Play 1.0a.

### Display

- 15.1"/14.1"/13.3" TFT XGA (1024x768 pixels) LCD panel available.
- 13.8" DSTN XGA (1024x768 pixels) LCD panel available.
- 4MB Synchronous Graphics RAM (SGRAM).
- Video Port Manager (VPM 1.10) for Zoomed Video (ZV) port.
- Simultaneous display with an external monitor.

 **Mass Storage**

- 3.5" floppy disk drive (interchangeable).
- 2.5" hard disk drive (12.7mm high or less).
- 5.25" CD-ROM.
- 2.5" (12.7mm high or less) or 3.0" (12.5mm high or less) secondary hard disk drive (optional).
- 100MB Zip drive (15mm high) (optional).

 **Audio**

- Sound Blaster Pro compatible.
- 3D stereo sound effects.
- Stereo full duplex support.
- 1MB ROM wavetable.
- Built-in microphone.
- Built-in speakers.

 **PC Card Sockets**

- CardBus support.
- One ZV-capable socket (Socket A).
- Two Type II PC cards or one Type III PC card.

 **Input/Output**

- Built-in trackpad (PS/2).
- Dual USB ports.
- S-video jack for TV output.
- 120-pin expansion port.
- RCA jack for video input.
- External monitor (CRT) port.
- Serial port.
- Parallel port.
- Dual PS/2 type ports.
- Speaker-out jack.
- Line-in jack.
- Microphone-in jack.

 **Infrared Wireless Communication**

- IrDA (HPSIR).
- ASKIR.
- Fast IR.

 **Power Management**

- APM 1.2.
- ACPI.
- Global standby.
- Suspend and resume.

 **AC Power Supply**

- AC input: 100~240VAC, 47~63Hz.
- DC output: 20V.
- Total output: 50W.

 **Rechargeable Battery Pack**

- Lithium-ion battery available.
- Battery low warning.

 **Size & Weight**

- 357mm(w)x275mm(d)x50mm(h) (14"x10.8"x1.9").
- 4.5kg (9.9lbs).



## Appendix B: I/O Port Pin Assignments

### Parallel Port

Pin	Signal	Pin	Signal
1	Strobe#	14	Auto Linefeed#
2	Data 0	15	Error#
3	Data 1	16	Initialize#
4	Data 2	17	Select In
5	Data 3	18	GND
6	Data 4	19	GND
7	Data 5	20	GND
8	Data 6	21	GND
9	Data 7	22	GND
10	ACK#	23	GND
11	Busy	24	GND
12	Paper Empty	25	GND
13	Select		

### Serial Port

Pin	Signal
1	DCD (Data Carrier Detect)
2	RXD (Received Data)
3	TXD (Transmitted Data)
4	DTR (Data Terminal Ready)
5	GND (Signal Ground)
6	DSR (Data Set Ready)
7	RTS (Request To Send)
8	CTS (Clear To Send)
9	RI (Ring Indicator)

### RCA Jack

Pin	Signal
1	Video-In
2	GND

**Monitor Port**

Pin	Signal	Pin	Signal	Pin	Signal
1	BRED	6	GND	11	N.C
2	BGREEN	7	GND	12	DDCDA
3	BBLUE	8	GND	13	DHSYNC
4	N.C	9	N.C	14	DVSYNC
5	GND	10	GND	15	DDCLK

**Dual PS/2 Type Ports**

Pin	Signal
1	EKDA
2	N.C
3	GND
4	VCC
5	EKCLK
6	N.C

Pin	Signal
1	EMDA
2	N.C
3	GND
4	VCC
5	EMCLK
6	N.C

**Dual USB Ports**

Pin	Signal
1	USB VCCA
2	USBP0-
3	USBP0+
4	GND

Pin	Signal
1	USB VCCB
2	USBP1-
3	USBP1+
4	GND

**S-video Jack**

Pin	Signal
1	GND
2	GND
3	XLUMA
4	XCRMA

## PC Card Sockets

### Socket A:

Pin	Signal	Pin	Signal	Pin	Signal
1	GND	35	GND	69	GND
2	A - CD3	36	A - CA5	70	A - CA19
3	A - CD4	37	A - CA4	71	A - CA20
4	GND	38	GND	72	GND
5	A - CD5	39	A - CA3	73	A - CA21
6	A - CD6	40	A - CA2	74	A - VCC - C
7	GND	41	GND	75	GND
8	A - CD7	42	A - CA1	76	GND
9	A - CE1#	43	A - CA0	77	A - VPP
10	GND	44	GND	78	A - CA22
11	A - CA10	45	A - CD0	79	GND
12	A - OE#	46	A - CD1	80	A - CA23
13	GND	47	GND	81	A - CA24
14	A - CA11	48	A - CD2	82	GND
15	A - CA9	49	A - WP#	83	A - CA25
16	GND	50	GND	84	A - VS2
17	A - CA8	51	GND	85	GND
18	A - CA13	52	A - CD1#	86	A - RESET
19	GND	53	A - CD11	87	A - WAIT#
20	A - CA14	54	GND	88	GND
21	A - WE#	55	A - CD12	89	A - INPACK
22	GND	56	A - CD13	90	A - REG#
23	A - RDYBY#	57	GND	91	GND
24	A - VCC - C	58	A - CD14	92	A - BVD2#
25	GND	59	A - CD15	93	A - BVD1#
26	GND	60	GND	94	GND
27	A - VPP	61	A - CE2#	95	A - CD8
28	A - CA16	62	A - VS1	96	A - CD9
29	GND	63	GND	97	GND
30	A - CA15	64	A - IORD#	98	A - CD10
31	A - CA12	65	A - IOWR#	99	A - CD2#
32	GND	66	GND	100	GND
33	A - CA7	67	A - CA17		
34	A - CA6	68	A - CA18		

**Socket B:**

Pin	Signal	Pin	Signal	Pin	Signal
1	GND	35	GND	69	GND
2	B - CD3	36	B - CA5	70	B - CA19
3	B - CD4	37	B - CA4	71	B - CA20
4	GND	38	GND	72	GND
5	B - CD5	39	B - CA3	73	B - CA21
6	B - CD6	40	B - CA2	74	B - VCC - C
7	GND	41	GND	75	GND
8	B - CD7	42	B - CA1	76	GND
9	B - CE1#	43	B - CA0	77	B - VPP
10	GND	44	GND	78	B - CA22
11	B - CA10	45	B - CD0	79	GND
12	B - OE#	46	B - CD1	80	B - CA23
13	GND	47	GND	81	B - CA24
14	B - CA11	48	B - CD2	82	GND
15	B - CA9	49	B - WP#	83	B - CA25
16	GND	50	GND	84	B - VS2
17	B - CA8	51	GND	85	GND
18	B - CA13	52	B - CD1#	86	B - RESET
19	GND	53	B - CD11	87	B - WAIT#
20	B - CA14	54	GND	88	GND
21	B - WE#	55	B - CD12	89	B - INPACK
22	GND	56	B - CD13	90	B - REG#
23	B - RDYBY#	57	GND	91	GND
24	B - VCC - C	58	B - CD14	92	B - BVD2#
25	GND	59	B - CD15	93	B - BVD1#
26	GND	60	GND	94	GND
27	B - VPP	61	B - CE2#	95	B - CD8
28	B - CA16	62	B - VS1	96	B - CD9
29	GND	63	GND	97	GND
30	B - CA15	64	B - IORD#	98	B - CD10
31	B - CA12	65	B - IOWR#	99	B - CD2#
32	GND	66	GND	100	GND
33	B - CA7	67	B - CA17		
34	B - CA6	68	B - CA18		

# Index

## A

- AC adapter
  - input rating A-3
  - using 1-4
- AC-in socket 1-12
- AC power indicator
  - on LCD cover 1-8
  - on top panel 1-10
- advanced configuration and power interface (ACPI) 2-26
- advanced power management (APM) 2-26
- audio
  - audio system A-2
  - mute on/off 2-20
  - volume decrease 2-20
  - volume increase 2-20

## B

- battery pack
  - battery power status indicator
    - on LCD cover 1-8
    - on top panel 1-10
  - charging 1-6
  - charging status indicator
    - on LCD cover 1-8
    - on top panel 1-10
  - inserting 1-5
  - low battery, indicator 1-10
  - proper handling 1-6
  - removing 1-5
- busy indicator, CD-ROM 2-14

## C

- CD-ROM
  - busy indicator 2-14
  - emergency eject hole 2-14
  - module, removing 2-15
  - using 1-16, 2-14

- CD-ROM latch 2-15
- charging, battery indicator
  - on LCD cover 1-8
  - on top panel 1-10
- charging, battery pack 1-6
- Compact Discs
  - handling 2-17
  - loading 2-16
- components
  - menu, in SCU 3-13
  - audio device 3-14
  - COM ports 3-13
  - enable internal
    - Fax/MODEM module 3-13
    - keyboard numlock 3-14
    - keyboard repeat 3-14
    - LPT port 3-13
    - PS/2 mouse port 3-14
    - TV mode 3-14
- cover latch, LCD 1-7
- CRT port 1-13
  - attaching device 4-8
  - simultaneous display, with LCD 2-20

## D

- DIP switch (SW1)
  - accessing 2-4
- disks
  - menu, in SCU 3-11
  - diskette drives 3-11
  - IDE settings 3-11
- display, LCD
  - brightness
    - decrease 2-20
    - increase 2-20
  - contrast
    - decrease 2-20
    - increase 2-20
  - display expansion 2-20

display, LCD (*continued*)  
location 1-9  
open, how to 1-7  
panel features 2-25  
simultaneous display, with  
external monitor 2-20  
dual PS/2 type ports 1-13  
dual USB ports 1-12

## **E**

eject button  
for CD-ROM 2-14  
for diskette 1-15  
for PC card sockets 2-18  
emergency eject hole, CD-ROM  
2-14  
exit  
menu, in SCU 3-19  
default settings 3-19  
exit (no save) 3-19  
restore settings 3-19  
save and exit 3-19  
version info 3-19  
expansion port 1-12  
external monitor (CRT) port 1-13  
attaching device 4-8  
simultaneous display, with  
LCD 2-20

## **F**

floppy disk drive  
location 1-14  
replacing 2-13  
floppy disk drive latch 2-13  
Fn key function  
audio mute on/off 2-20  
audio volume decrease 2-20  
audio volume increase 2-20  
LCD brightness decrease  
2-20  
LCD brightness increase 2-20  
LCD contrast decrease 2-20  
LCD contrast increase 2-20

Fn key function (*continued*)  
suspend mode, entering 2-20  
switching display 2-20

## **H**

hard disk drive  
inserting 2-10  
in-use, indicator 1-10  
location 1-14  
removing 2-10  
replacing 2-11  
suspend mode 2-29  
hard disk drive latch 2-10  
hot keys, features 2-20

## **I**

infrared A-3  
using 1-16  
input interface  
built-in trackpad 1-9  
dual PS/2 type ports 1-13  
dual USB ports 1-12  
line-in jack 1-14  
microphone-in jack 1-14  
RCA jack 1-12  
serial port 1-12  
inserting  
battery pack 1-5  
diskettes 2-12  
hard disk drive 2-10  
memory module 2-8  
PC card 2-19  
I/O port pin assignments  
dual PS/2 type ports B-2  
dual USB ports B-2  
monitor port B-2  
parallel port B-1  
PC card sockets B-3, B-4  
RCA jack B-1  
serial port B-1  
S-video jack B-2

## **K**

keyboard  
  location 1-9  
  open, how to 2-5  
keyboard latches 2-5  
keyboard layout 2-21, 2-22  
keys, Windows 95  
  Application key 2-23  
  Windows key 2-23

## L

latch  
  CD-ROM 2-15  
  floppy disk drive 2-13  
  hard disk drive 2-10  
  keyboard 2-5  
  LCD cover 1-7  
LCD  
  brightness  
    decrease 2-20  
    increase 2-20  
  contrast  
    decrease 2-20  
    increase 2-20  
  display expansion 2-20  
  location 1-9  
  open, how to 1-7  
  panel features 2-25  
  simultaneous display, with  
    external monitor 2-20  
LED status indicators 1-10  
  on LCD cover 1-8  
  on top panel 1-10  
locations  
  AC-in socket 1-12  
  battery pack 1-5  
  CD-ROM drive 1-16  
  CD-ROM eject button 2-14  
  CD-ROM latch 2-15  
  cover latch, LCD 1-7  
  DIP switch (SW1) 2-5  
  diskette eject button 1-15  
  dual PS/2 type ports 1-13  
  dual USB ports 1-12  
  emergency eject hole,  
    CD-ROM 2-14

locations (*continued*)  
  expansion port 1-12  
  external monitor port 1-13  
  floppy disk drive 1-14  
  floppy disk drive latch 2-13  
  Fn key 2-21  
  hard disk drive 1-14  
  hard disk drive latch 2-10  
  hot keys 2-21  
  infrared 1-16  
  keyboard 1-9  
  keyboard latches 2-5  
  LCD 1-9  
  LED indicators 1-10  
    on LCD cover 1-8  
    on top panel 1-10  
  left-side stand 1-16  
  line-in jack 1-14  
  memory sockets 2-7  
  microphone, built-in 1-9  
  microphone-in jack 1-14  
  numeric keypad 2-22  
  parallel port 1-12  
  PC card eject buttons 2-18  
  PC card sockets 1-14  
  power button 1-10  
  processor 2-3  
  RCA jack 1-12  
  right-side stand 1-15  
  security connector 1-12  
  serial port 1-12  
  speaker-out jack 1-14  
  stereo speakers 1-9  
  S-video jack 1-12  
  trackpad and buttons 1-9  
  ventilation 1-15  
low battery, indicator 1-8, 1-10

## M

memory  
  expanding 2-6, A-1  
  menu, in SCU 3-10  
    cache systems 3-10  
  sockets 2-7

memory module  
  installing 2-8  
  removing 2-9  
messages, POST 3-2, 3-3  
microphone, built-in 1-9  
microphone-in jack 1-14

## **N**

numeric keypad 2-22

## **O**

operating environment 1-3  
output interface  
  external monitor port 1-13  
  parallel port 1-12  
  speaker-out jack 1-14  
  stereo speakers 1-9  
  S-video jack 1-12

## **P**

parallel port 1-12  
  attaching device 4-3  
PC card  
  inserting 2-19  
  removing 2-19  
PC card sockets 1-14, 2-18  
  eject button 2-18  
  features 2-18, A-2  
PCMCIA card  
  See PC card  
POST 3-2  
  messages  
    error detected 3-3  
    normal operation 3-2  
power  
  menu, in SCU 3-16  
    advance CPU controls  
      3-18  
    customize 3-16  
    enable battery low  
      suspend 3-18  
    enable modem ring  
      resume 3-18  
    enable power saving 3-16

power (*continued*)  
  high power saving 3-16  
  low power saving 3-16  
  medium power saving  
    3-16  
  resume timer 3-17  
  suspend controls 3-17  
power button 1-10  
power cord, usage 1-4  
power management 2-26  
  advanced configuration and  
  power interface 2-26  
  advanced power  
  management 2-26  
power on, indicator 1-10  
processor 2-2, A-1  
  replacing 2-3  
proper handling, battery pack 1-6  
PS/2 type ports 1-13  
  attaching device 4-9

## **R**

RCA jack 1-12  
  attaching device 4-5  
rechargeable battery pack A-3  
recharging, battery pack 1-6  
removing  
  battery pack 1-5  
  CD-ROM module 2-15  
  diskettes 2-12  
  floppy disk drive 2-13  
  hard disk drive 2-10  
  memory module 2-9  
  PC cards 2-19  
replacing, processor 2-3  
resume 2-27  
  from POS mode 2-28  
  from STD mode 2-29  
  from STR mode 2-28

## **S**

SCU  
  See system configuration  
  utility

- security connector 1-12
  - attaching security lock 4-2
- serial port 1-12
  - attaching device 4-7
- setting
  - DIP switch 2-4
- size and weight A-3
- sockets, memory 2-7
- sockets, PC card 1-14, 2-18
- speaker-out jack 1-14
- specifications
  - AC power supply A-3
  - audio A-2
  - BIOS, system A-1
  - display A-1
  - infrared wireless
    - communication A-3
  - input/output A-2
  - memory A-1
  - PC card sockets A-2
  - power management A-3
  - processor A-1
  - rechargeable battery pack A-3
  - size and weight A-3
  - storage A-2
- standby, global 2-27
- startup
  - menu, in SCU 3-8
    - boot device 3-8
    - boot password 3-9
    - date and time 3-8
    - display 3-8
    - enable battery low beep 3-8
    - enable LCD expand mode 3-8
    - enable power on sound 3-8
    - fast boot 3-8
    - SCU password 3-9
- stereo speakers 1-9
- suspend 2-27
  - Fn key function, using 2-20
  - indicator 1-10
  - power on suspend 2-28

- suspend (*continued*)
  - resume 2-28
- suspend to disk 2-29
  - resume 2-29
- suspend to RAM 2-28
  - resume 2-28
- S-video jack 1-12
  - attaching device 4-4
- system configuration utility
  - features 3-4
    - components menu 3-13
    - disks menu 3-11
    - exit menu 3-19
    - memory menu 3-10
    - power menu 3-16
    - startup menu 3-8
  - initiating 3-5
  - menu bar, working with 3-6
  - pull-down menu, working with 3-7
- system status LED indicators
  - locations 1-8, 1-10
  - on LCD cover 1-8
    - battery status 1-8
    - power status 1-8
  - on top panel 1-10
    - battery status 1-10
    - IDE device status 1-10
    - power status 1-10
    - suspend status 1-10

## T

- trackpad and buttons 1-9
- TV output 2-24

## U

- unpacking 1-2
- upgrading processor 2-2
- USB ports 1-12
  - attaching device 4-6

## V

- ventilation 1-15